

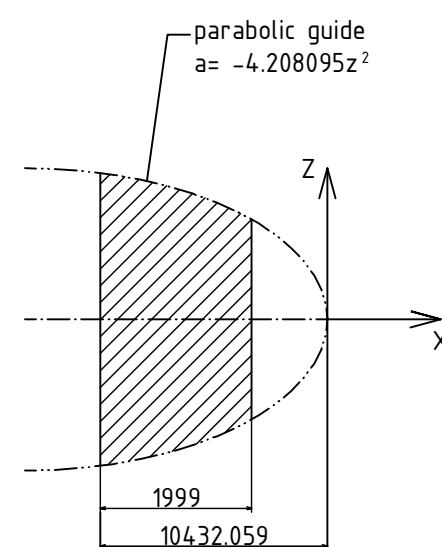
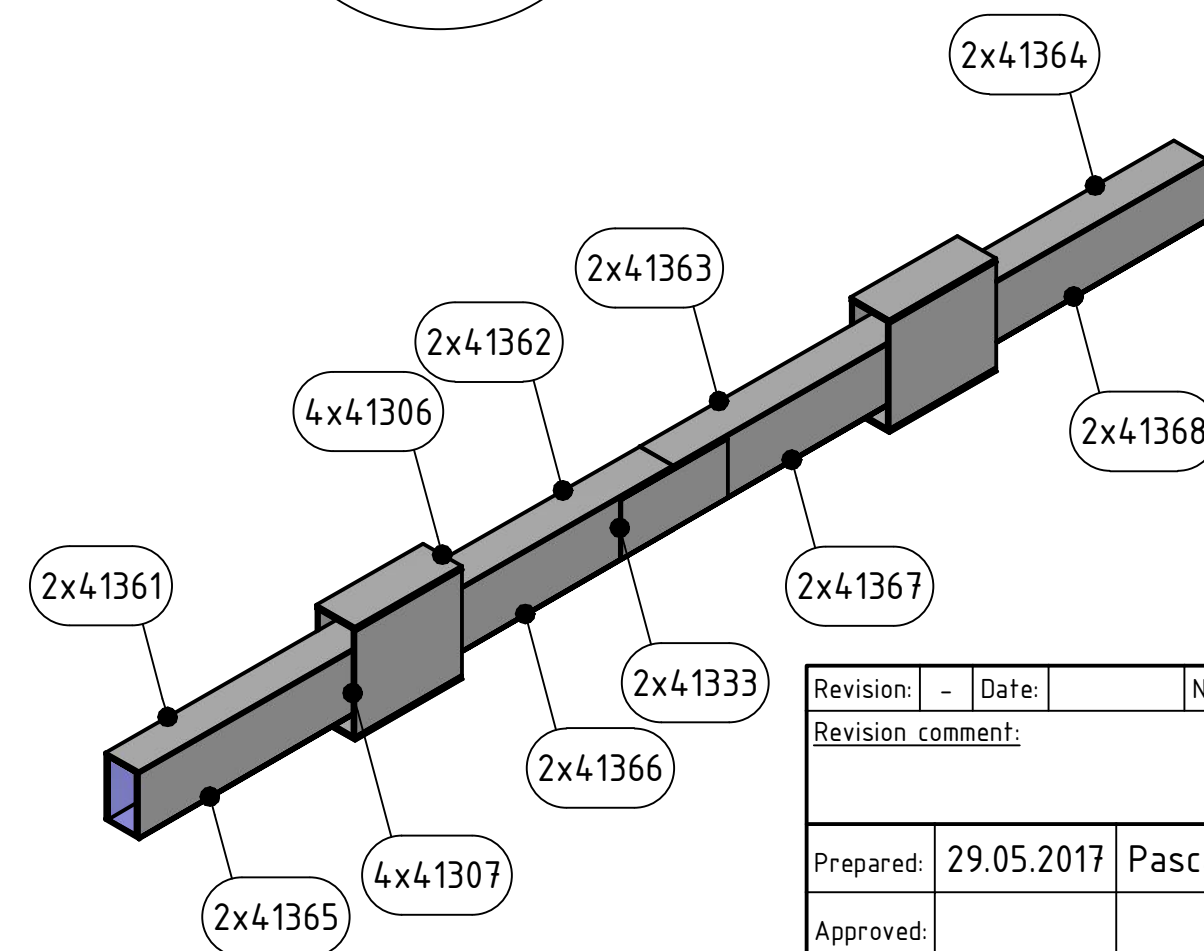



Truly curved parabolic guide

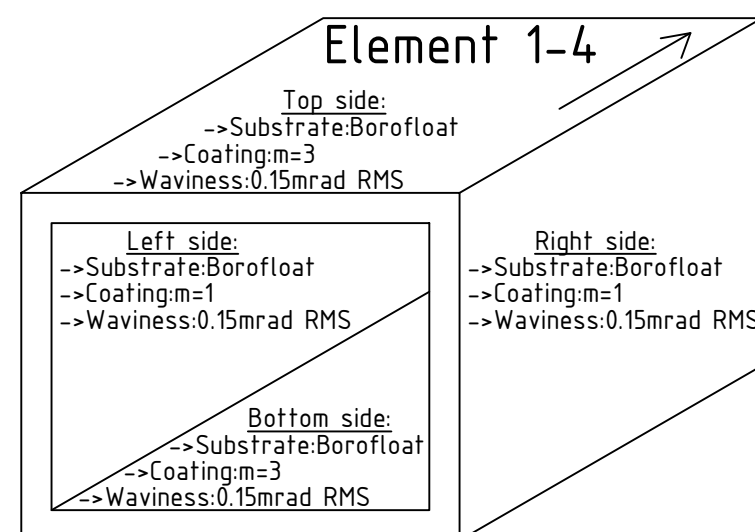

Scratch-marks:
horizontal & vertical
scratch-marks on ng-unit
entrance and exit front faces

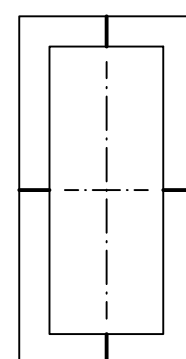

03	Test pressure: $< 5 \times 10^{-2}$ mbar
02	Max. leak rate: 1×10^{-7} mbar * l/s
01	General tolerances ISO 2768-mK
	All dimensions are in millimeter
No.	Notes

Revision:	-	Date:		Name:	
Revision comment:					SN16070 NERA focusing guide
					DUBNA
Prepared:	29.05.2017	Pascal Baumgartner			Dimensions ISO 14405 (E) / Dimensions = mm
Approved:					 10,7 kg A2 1 / 1
SwissNeutronics		41271- Unit-9.idw			