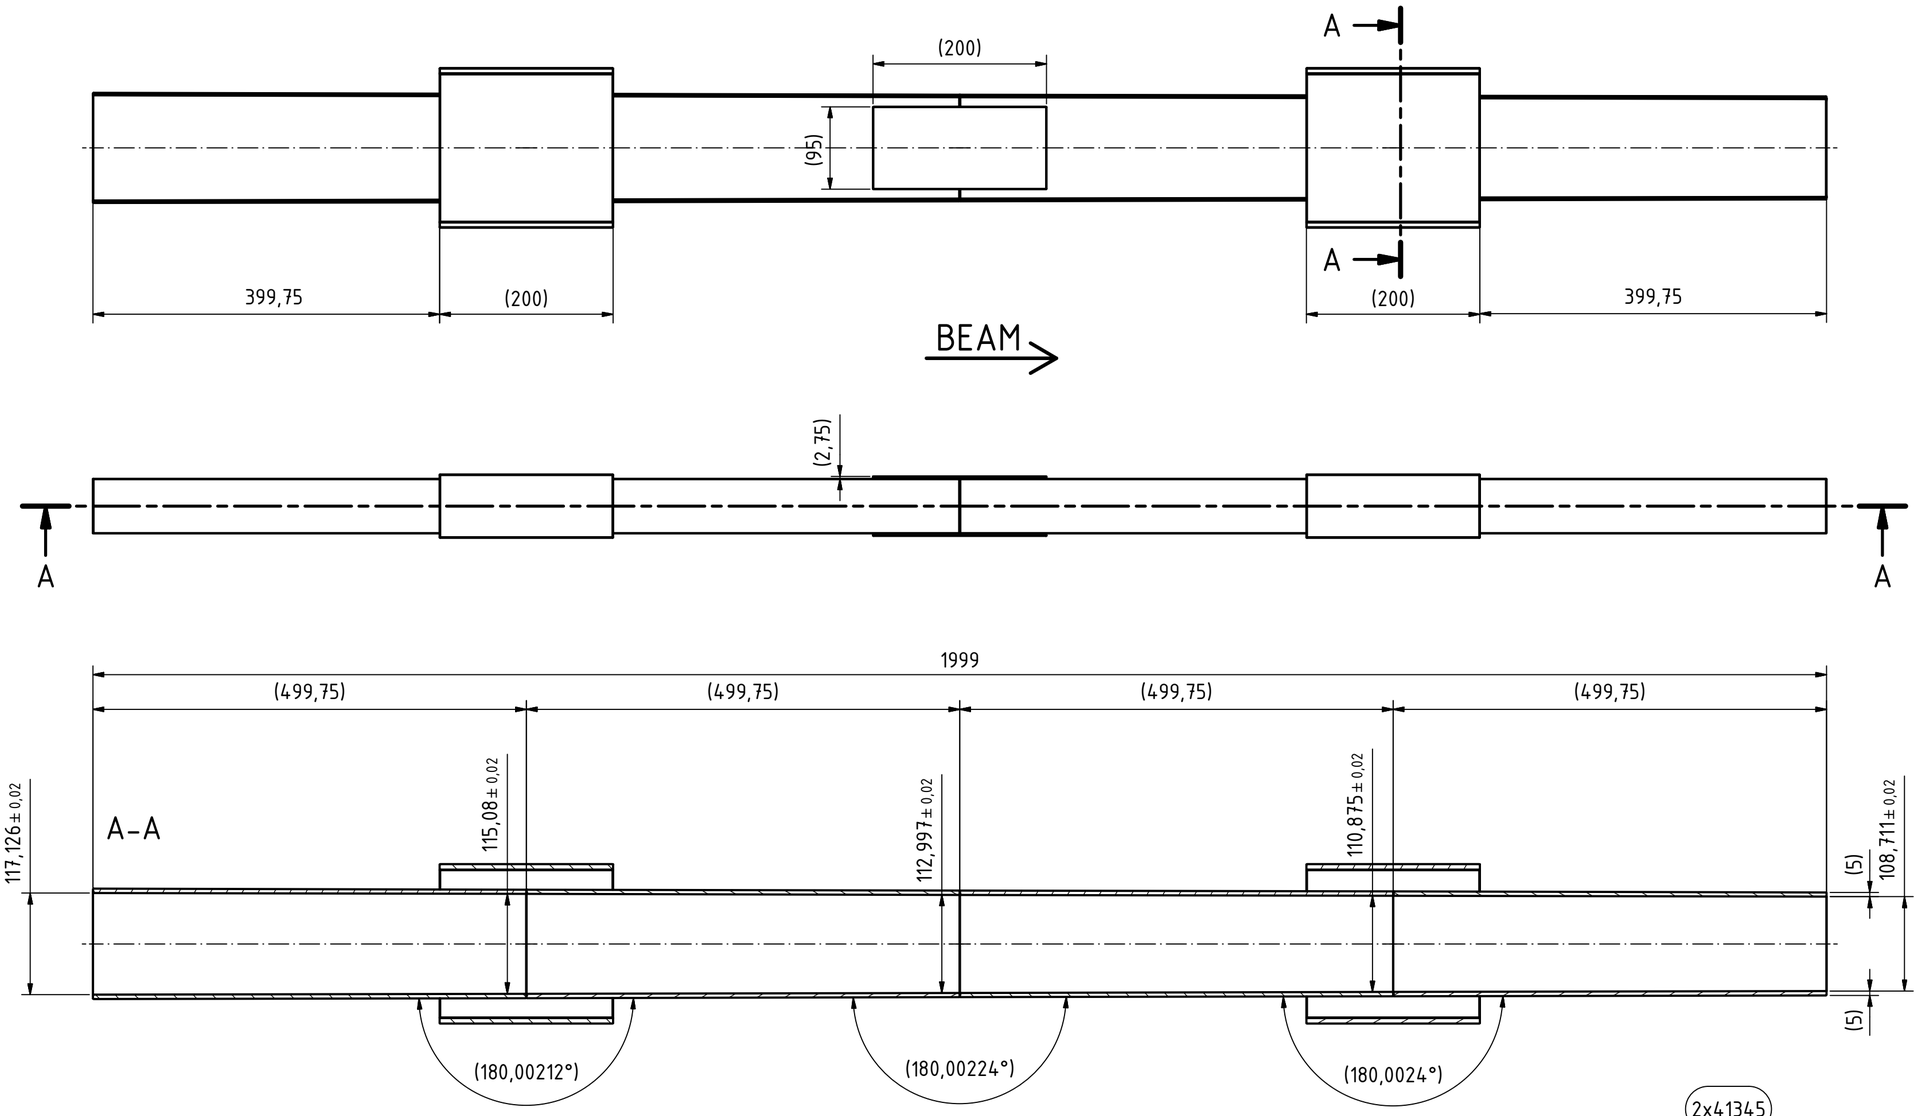

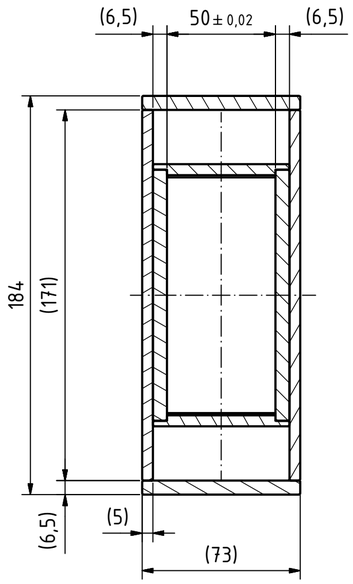

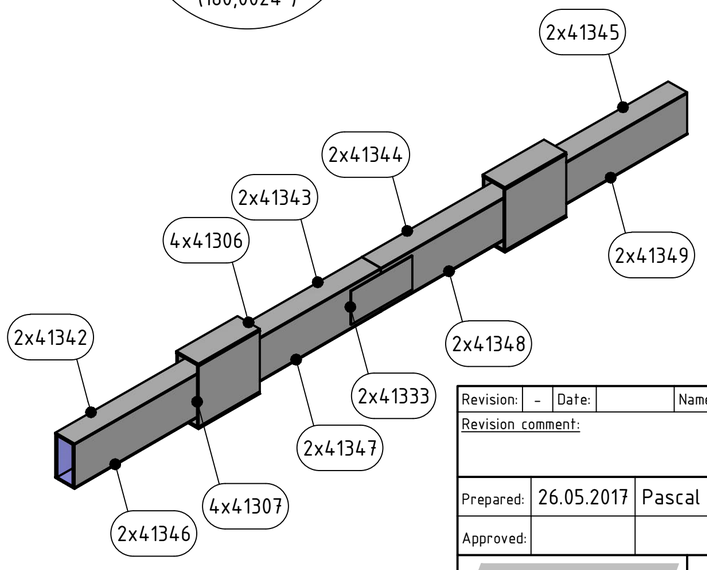

Truly curved parabolic guide

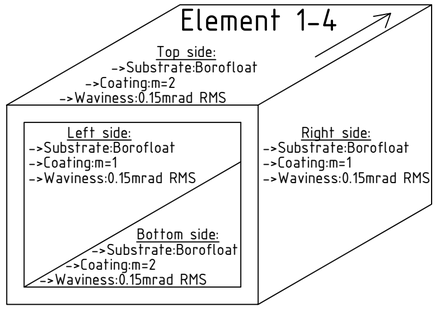



Scratch-marks:
horizontal & vertical
scratch-marks on ng-unit
entrance and exit front faces



No.	Notes
~~03~~	~~Testpressure: < 5x10⁻² mbar~~ ~~Max. leakrate: 1x10⁻⁷ mbar*l/s~~
02	General tolerances ISO 2768-mK
01	All dimensions are in millimeter

Revision: -	Date:	Name:	SN16070 NERA focusing guide
Revision comment:			DUBNA
Prepared: 26.05.2017	Pascal Baumgartner		Dimensions ISO 14405 Ⓔ / Dimensions = mm
Approved:			11,8 kg A2 1 /1
SwissNeutronics	41269- Unit-7.idw		