

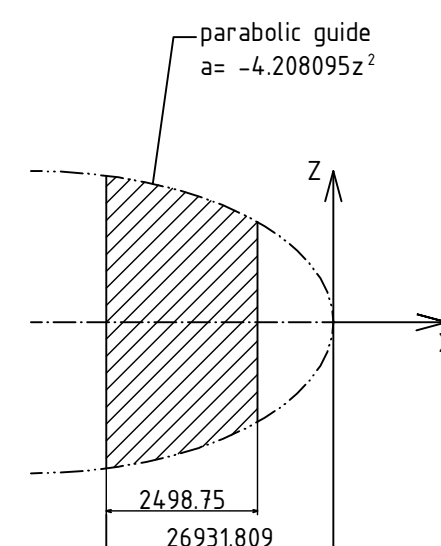


Truly curved parabolic guide

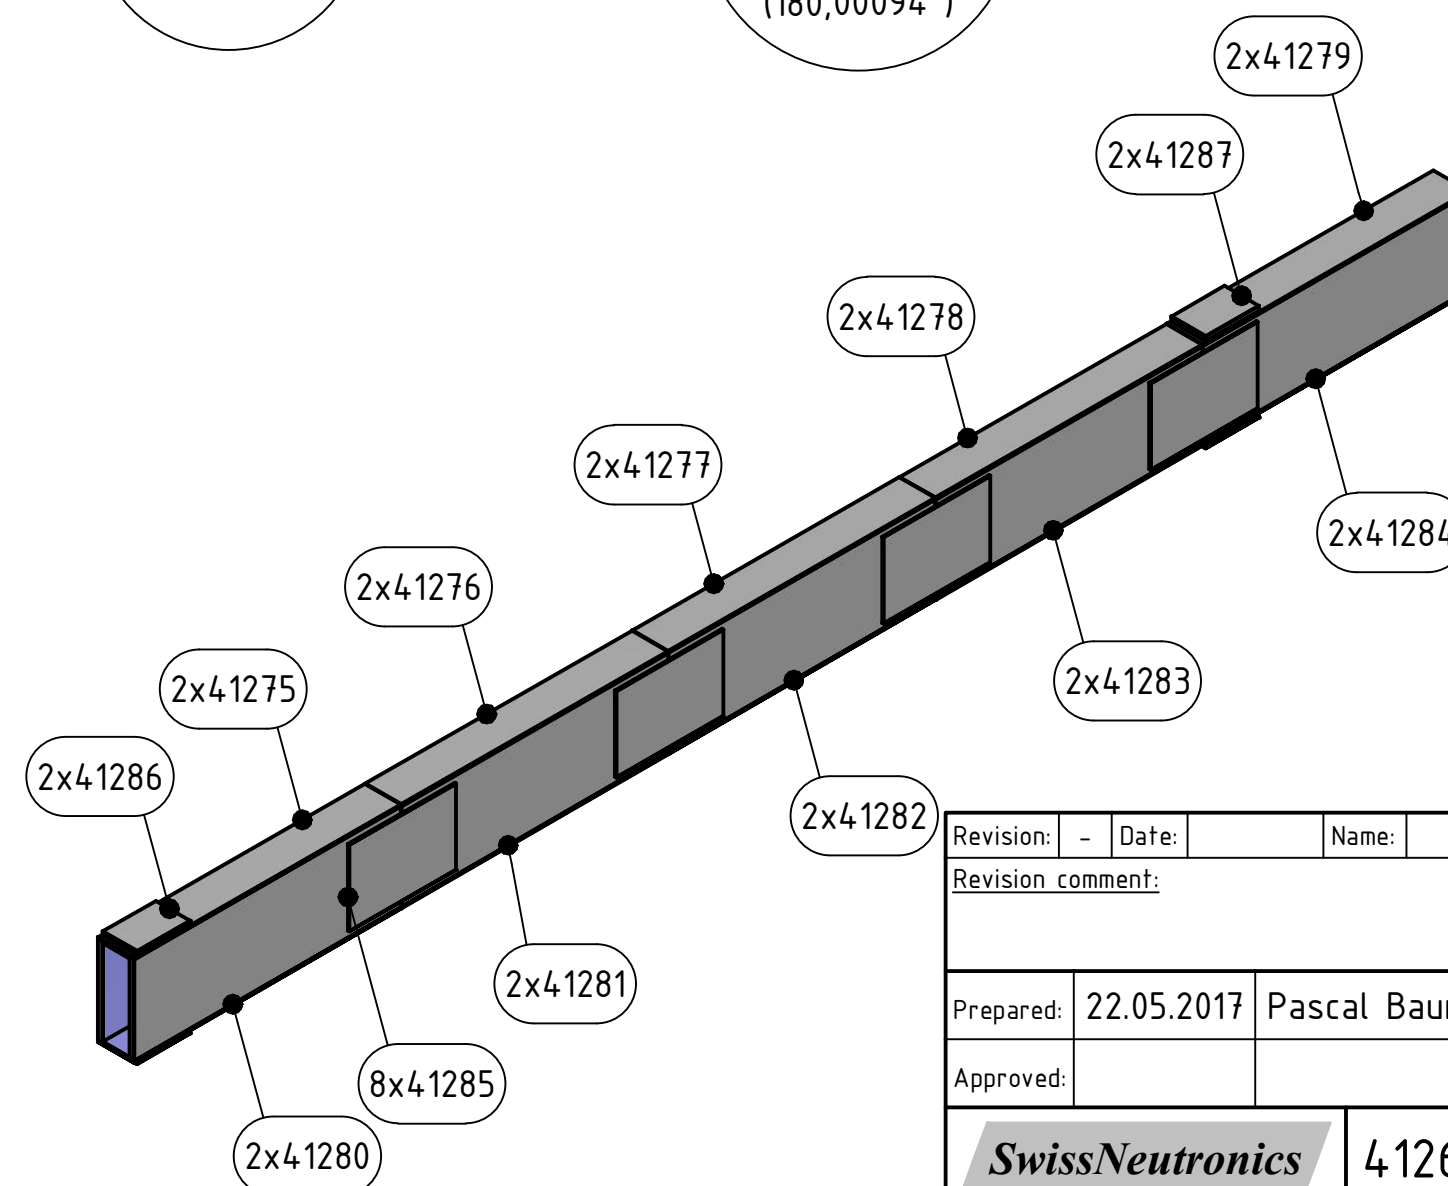

Scratch-marks:
horizontal & vertical
scratch-marks on ng-unit
entrance and exit front faces

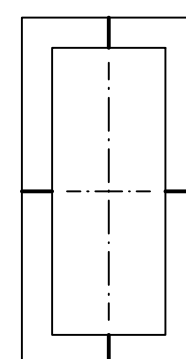

03	Test pressure: $< 5 \times 10^{-2}$ mbar
02	Max. leak rate: 1×10^{-7} mbar * l/s
02	General tolerances ISO 2768-mK
01	All dimensions are in millimeter
No.	Notes

Revision: -	Date:	Name:	SN16070 NERA focusing guide
Revision comment:			DUBNA
Prepared:	22.05.2017	Pascal Baumgartner	Dimensions ISO 14405 (E) / Dimensions = mm
Approved:			21,0 kg A2 1 / 1
SwissNeutronics		41263- Unit-1.idw	

