

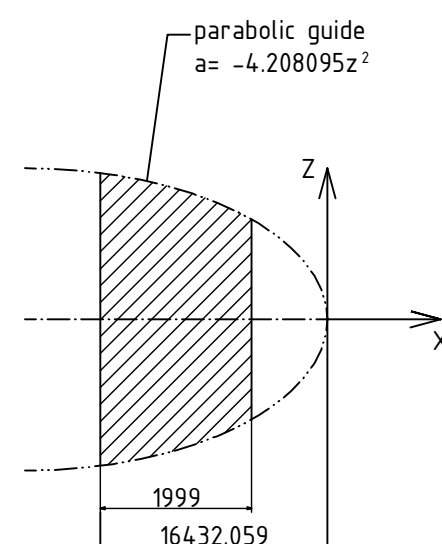


Truly curved parabolic guide

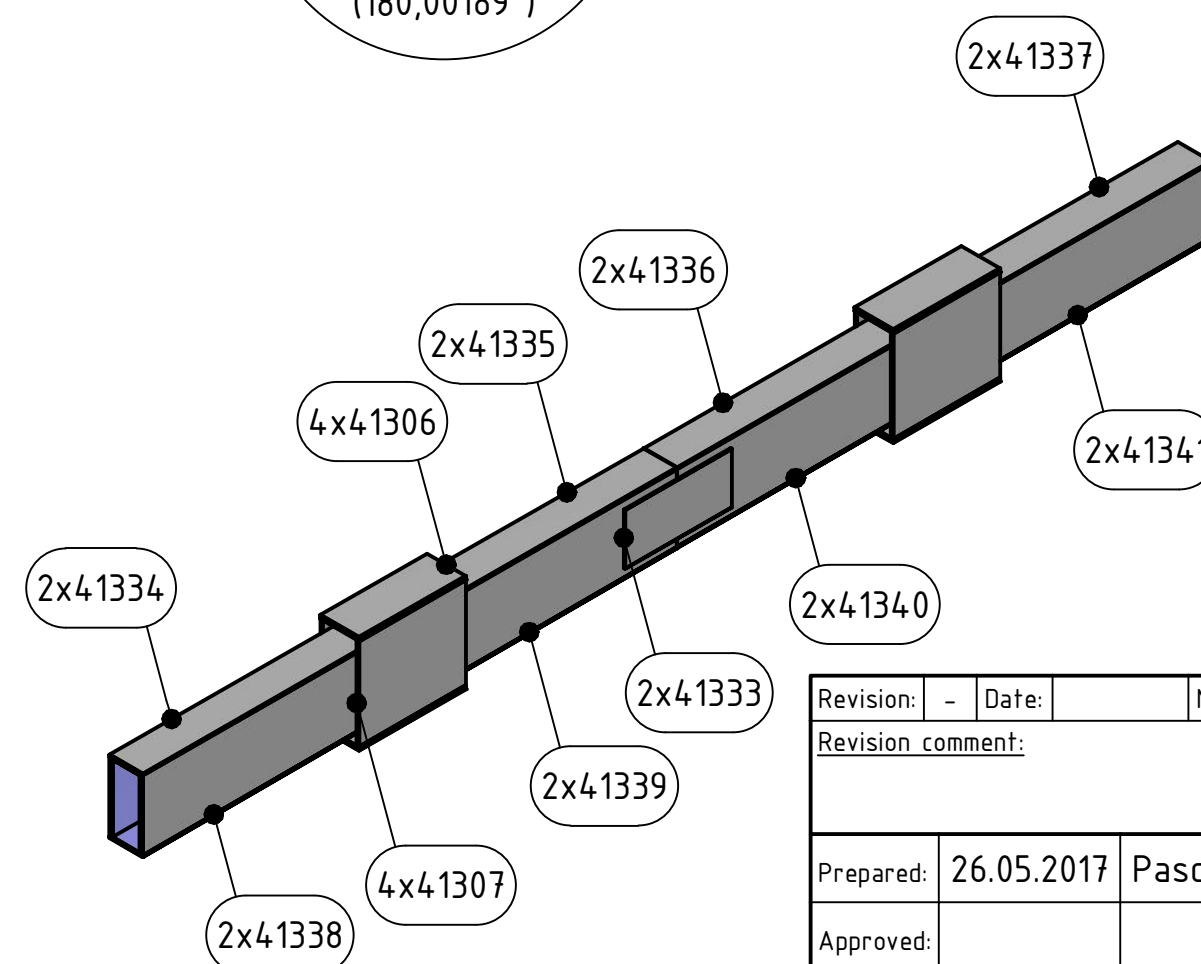

Scratch-marks:
 horizontal & vertical
 scratch-marks on ng-unit
 entrance and exit front faces

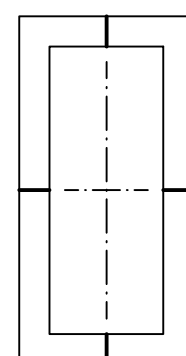

03	Test pressure: $< 5 \times 10^{-2}$ mbar
	Max. leak rate: 1×10^{-7} mbar·l/s
02	General tolerances ISO 2768-mK
01	All dimensions are in millimeter
No. Notes	

Revision: -	Date:	Name:	SN16070 NERA focusing guide	
Revision comment:			DUBNA	
Prepared:	26.05.2017	Pascal Baumgartner	Dimensions ISO 14405 © / Dimensions = mm	
Approved:			12,2 kg A2 1 / 1	

SwissNeutronics

41268- Unit-6.idw

