


Hawkbit

A diagram with 'Hawkbit' at the top. Three arrows point downwards from it: 'Poll' on the left, 'Binary' in the middle, and 'Download' on the right.

Prerequisites:

- Platform IO
- Arduino Framework
- Multiple OTA Partitions
- Power loss Handling
- File Corruptness Check

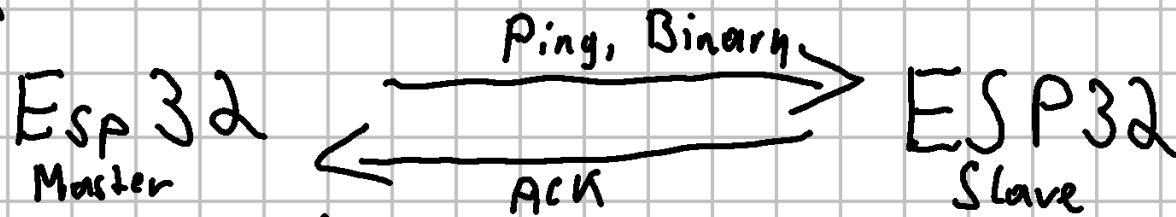

- WiFi connect
- Cyclic Hawkbit Poll
- Binary Download in LittleFs File + Verification
- Write to OTA

- Broadcast Ping
- Wait with Retries for ACK of all known Slaves
- if not all known Slaves respond retry later / update responding Slaves?
- Based on Bin & Slave Version select Slaves to update
- Send Update Files over UDP Multicast
- Wait for ACK File verification
- If one Slave responds that ACK is NOK resend Binary File
- Respond to Hawkbit which Slaves got updated

- Wait for Master Ping
- On Master Ping: send Version
- Retrieve Binary File and Write to File
- File verification send ACK to Master
- Write to OTA
- After Update send Version to Master