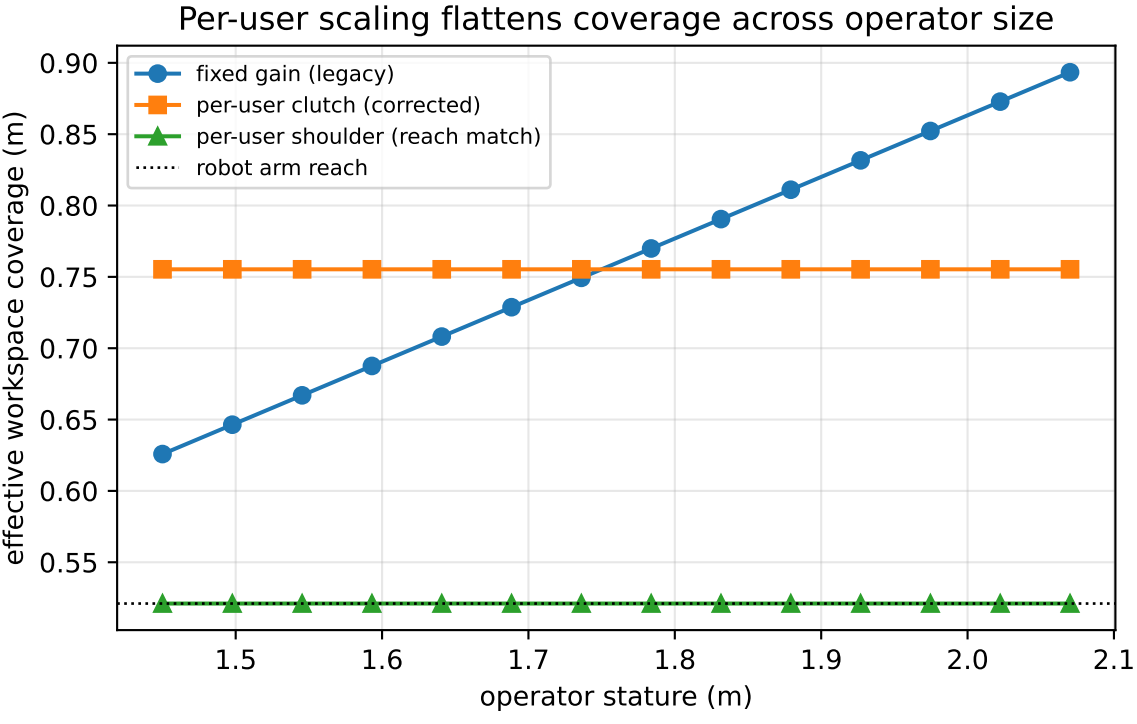
Per-user scaling flattens coverage across operator size
fixed gain (legacy)
per-user clutch (corrected)
per-user shoulder (reach match)
robot arm reach
effective workspace coverage (m)
0.90
0.85
0.80
0.75
0.70
0.65
0.60
0.55
1.5
1.6
1.7
1.8
1.9
2.0
2.1
operator stature (m)