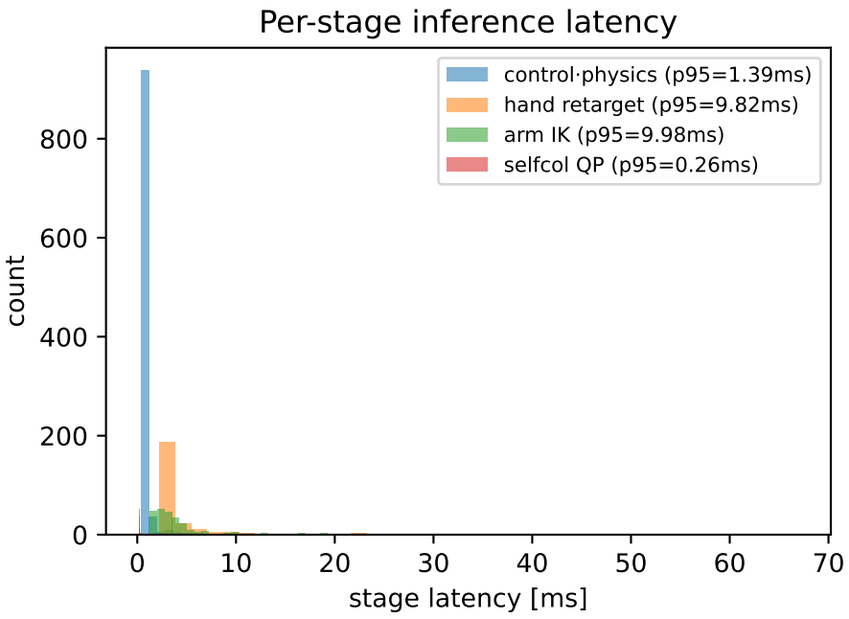
Per-stage inference latency
control·physics (p95=1.39ms)
hand retarget (p95=9.82ms)
arm IK (p95=9.98ms)
selfcol QP (p95=0.26ms)
count
stage latency [ms]

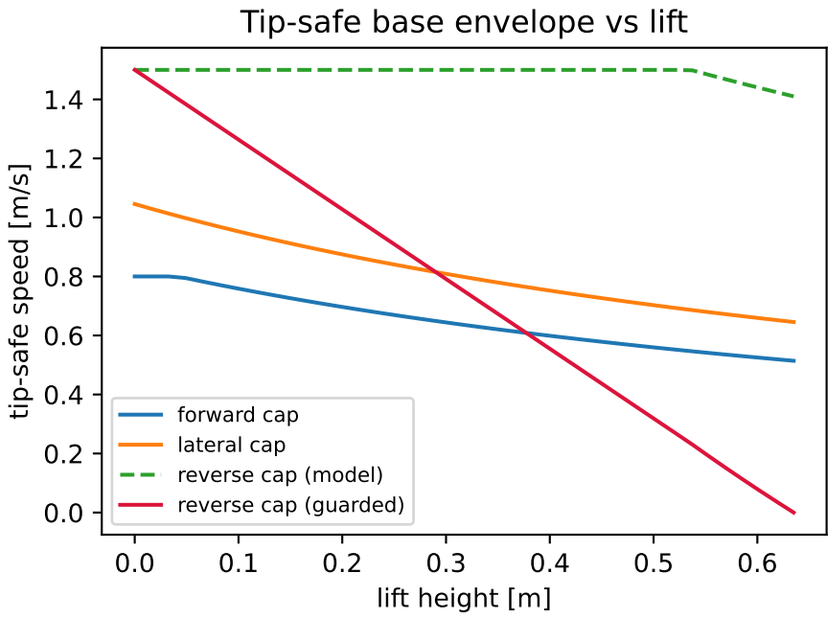
Tip-safe base envelope vs lift
forward cap
lateral cap
reverse cap (model)
reverse cap (guarded)
tip-safe speed [m/s]
lift height [m]

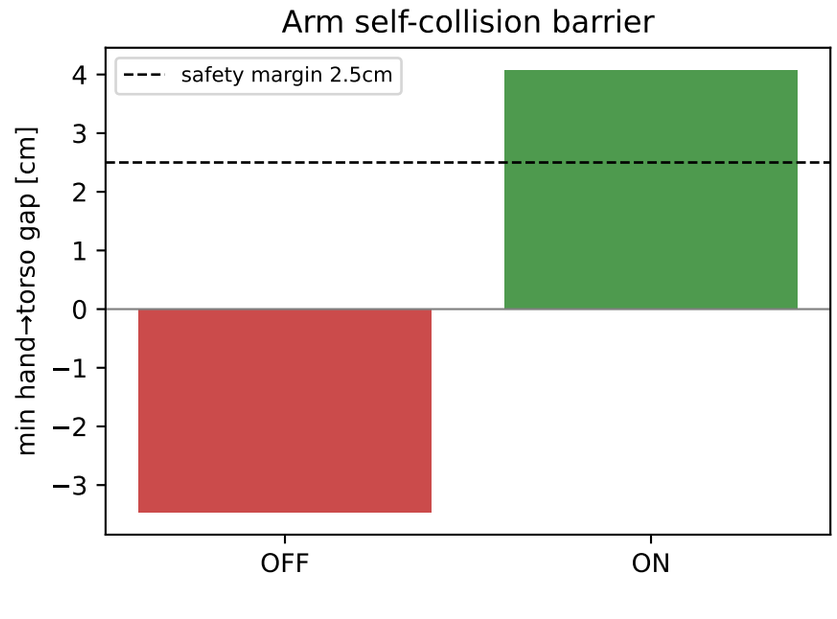
Arm self-collision barrier
safety margin 2.5cm
min hand→torso gap [cm]
OFF
ON