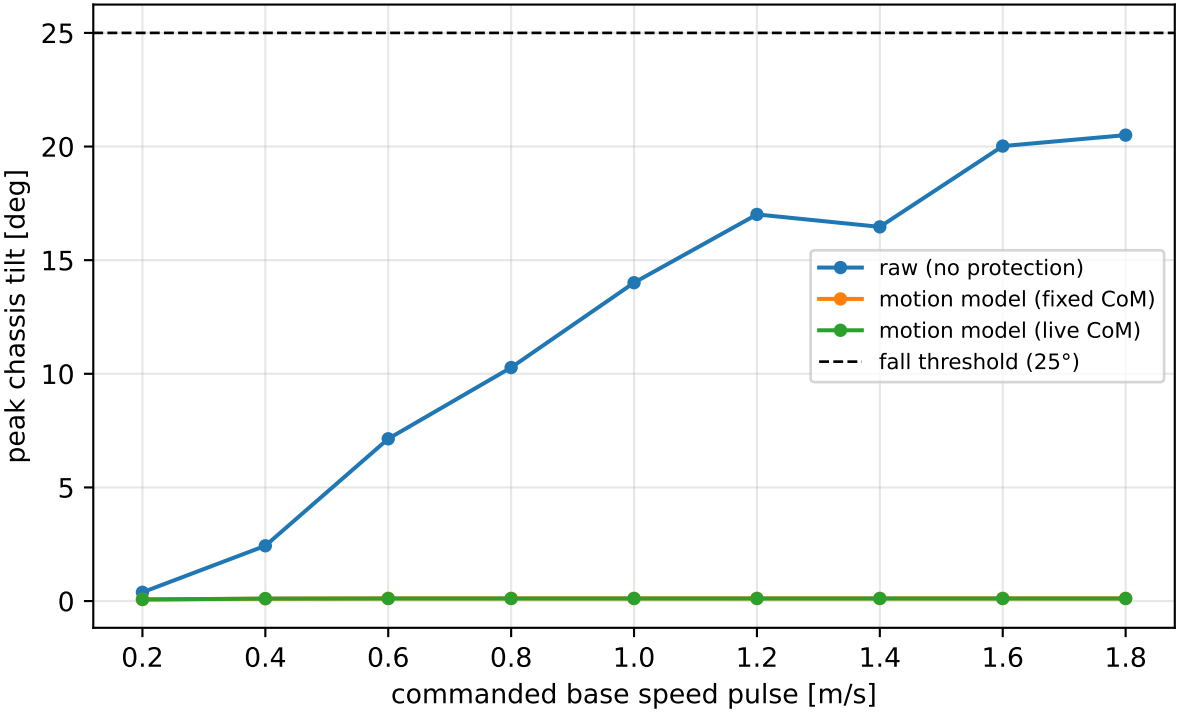
Dynamic base-acceleration tip (lift 0.30 m)
peak chassis tilt [deg]
commanded base speed pulse [m/s]
0
5
10
15
20
25
0.2
0.4
0.6
0.8
1.0
1.2
1.4
1.6
1.8
raw (no protection)
motion model (fixed CoM)
motion model (live CoM)
fall threshold (25°)