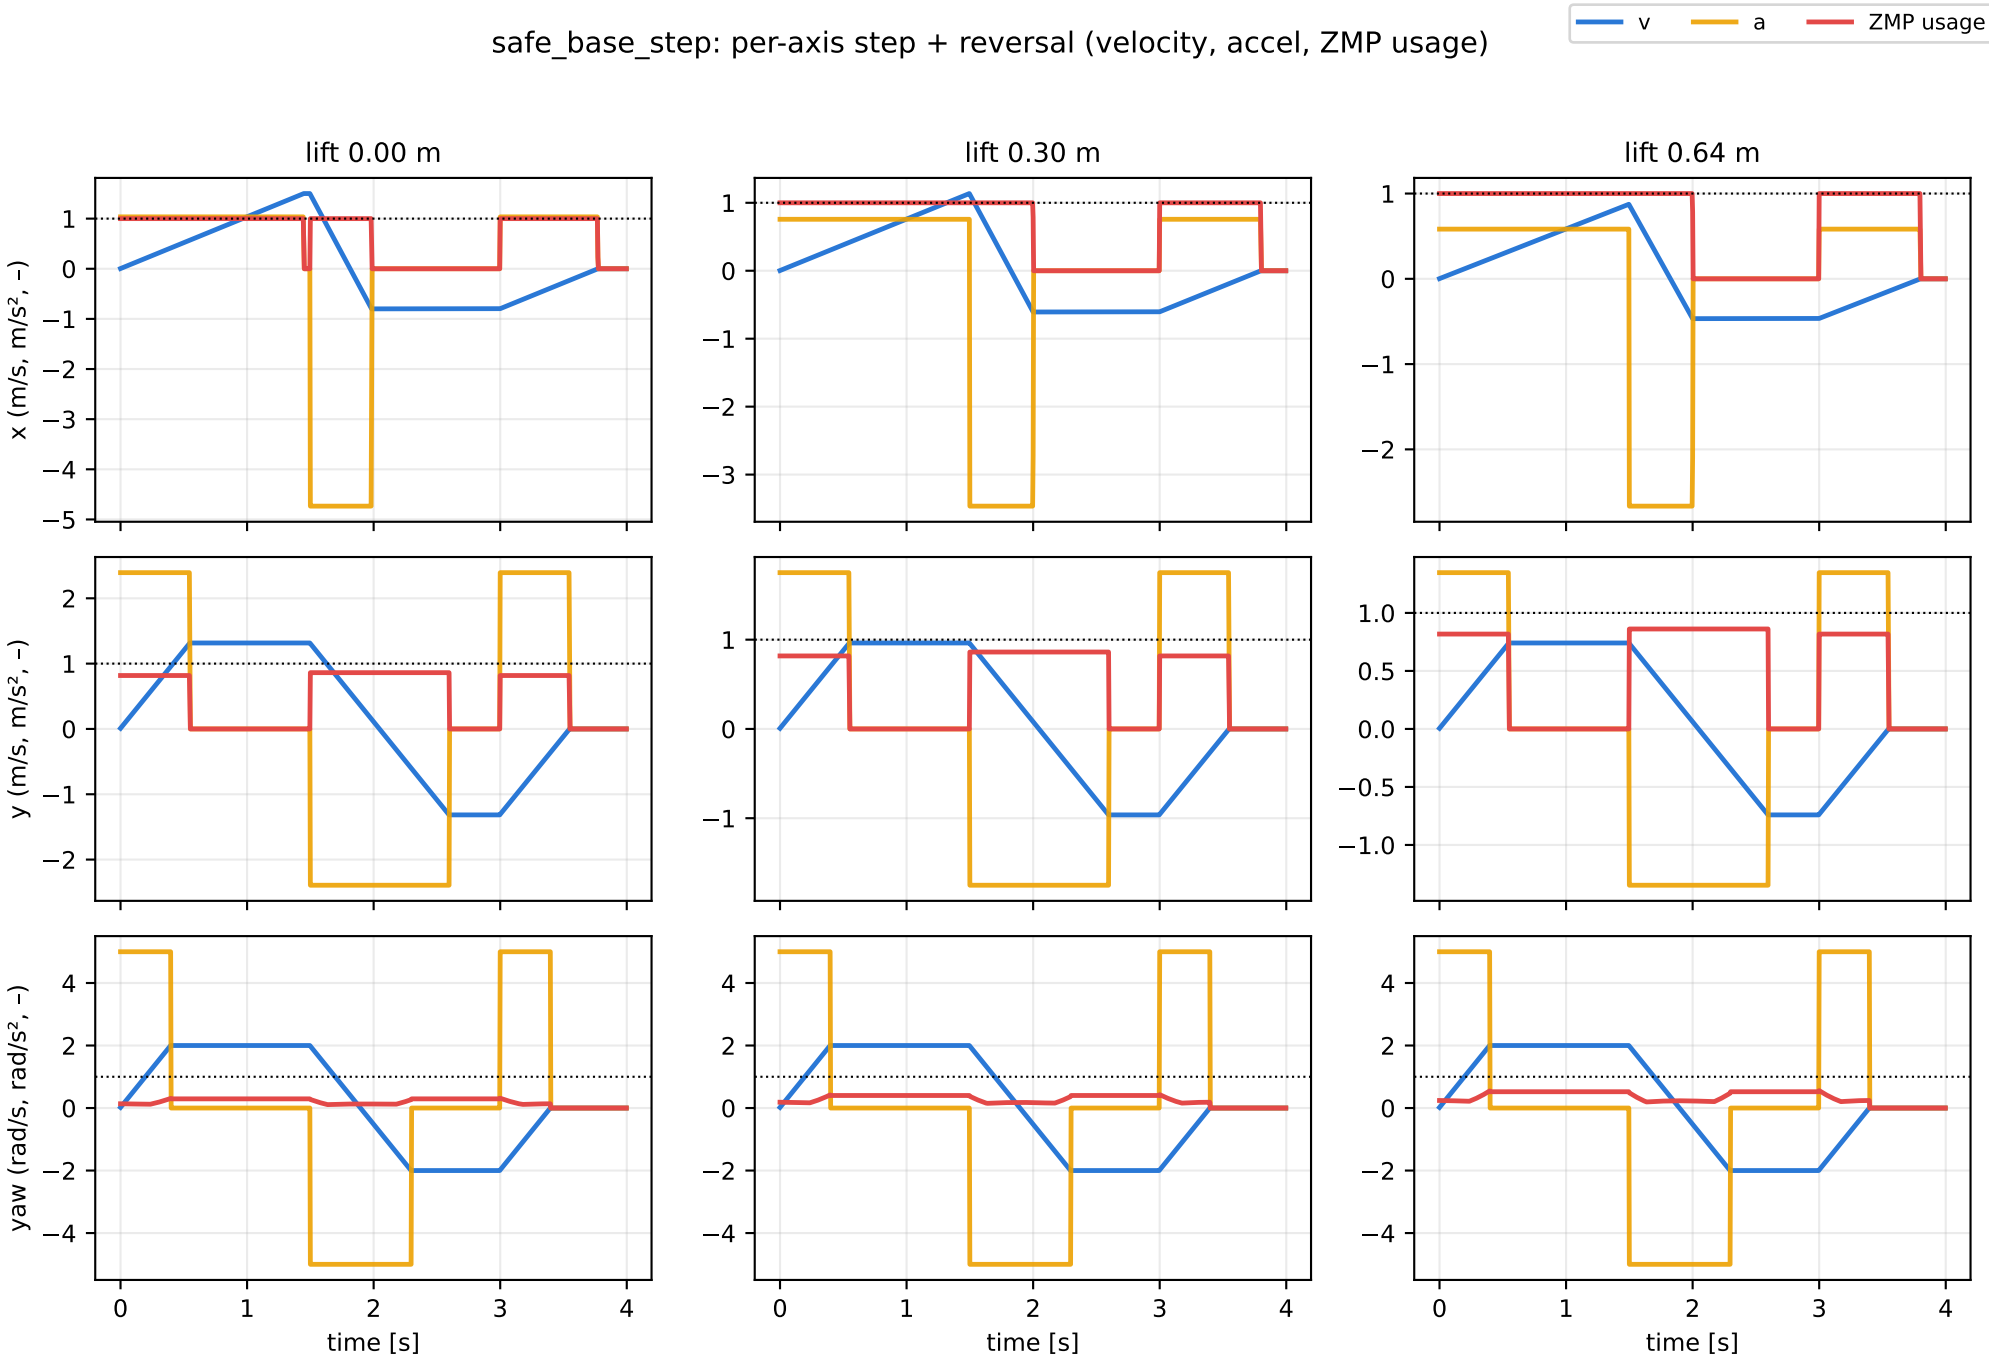
safe_base_step: per-axis step + reversal (velocity, accel, ZMP usage)
v
a
ZMP usage
lift 0.00 m
lift 0.30 m
lift 0.64 m
x (m/s, m/s², –)
y (m/s, m/s², –)
yaw (rad/s, rad/s², –)
time [s]
time [s]
time [s]