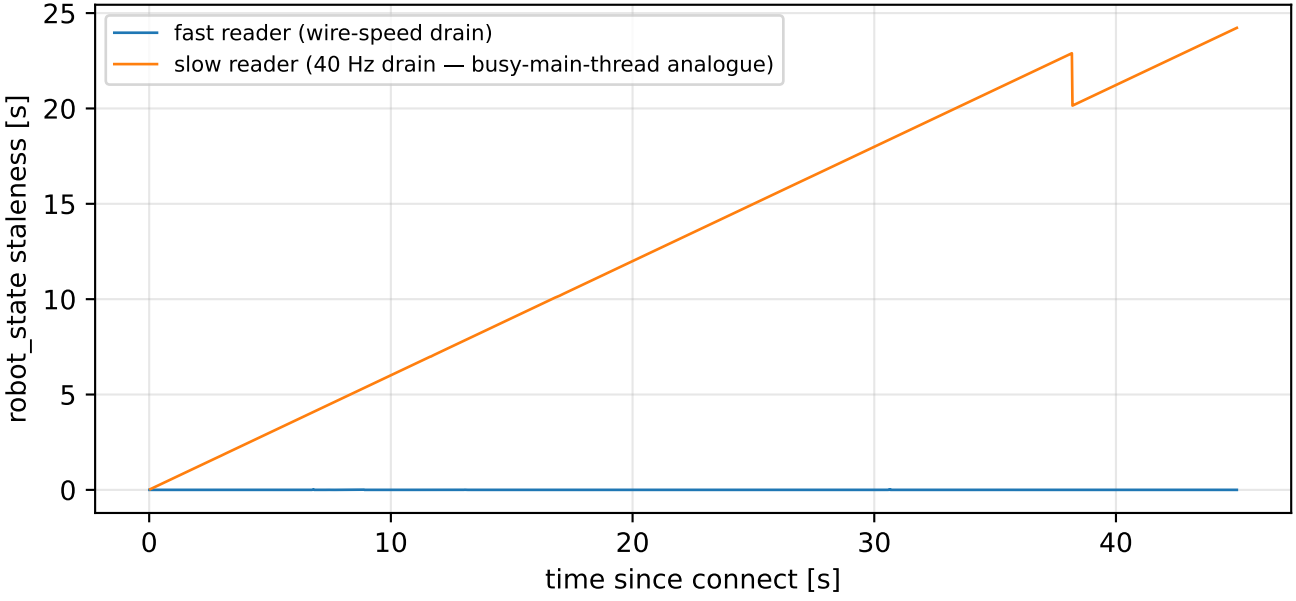
Client-side receive-buffer buildup vs drain rate (loopback, stream @ bridge rate
fast reader (wire-speed drain)
slow reader (40 Hz drain — busy-main-thread analogue)
robot_state staleness [s]
time since connect [s]
0
5
10
15
20
25
0
10
20
30
40