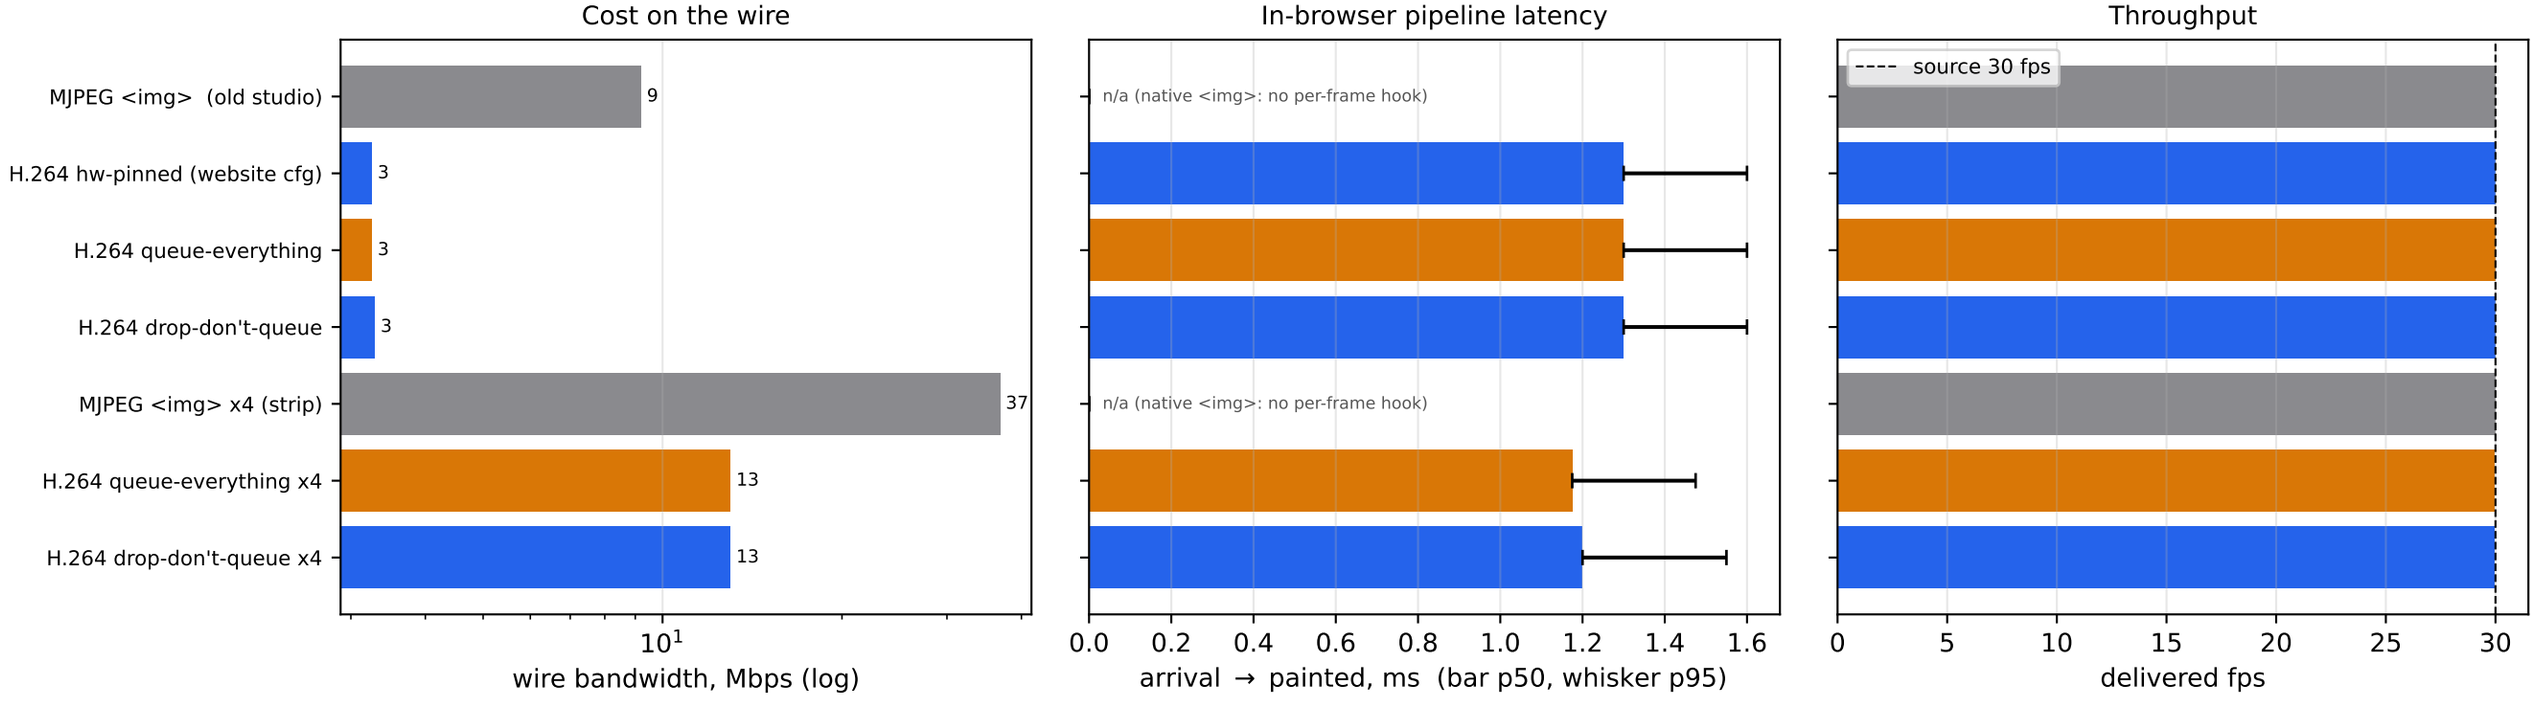
MABEL Control Center — camera transport (1280x720 @ 30 fps, Chrome/macOS)
Cost on the wire
In-browser pipeline latency
Throughput
MJPEG <img> (old studio)
H.264 hw-pinned (website cfg)
H.264 queue-everything
H.264 drop-don't-queue
MJPEG <img> x4 (strip)
H.264 queue-everything x4
H.264 drop-don't-queue x4
9
3
3
3
37
13
13
n/a (native <img>: no per-frame hook)
n/a (native <img>: no per-frame hook)
source 30 fps
10^1
wire bandwidth, Mbps (log)
0.0 0.2 0.4 0.6 0.8 1.0 1.2 1.4 1.6
arrival → painted, ms (bar p50, whisker p95)
0 5 10 15 20 25 30
delivered fps