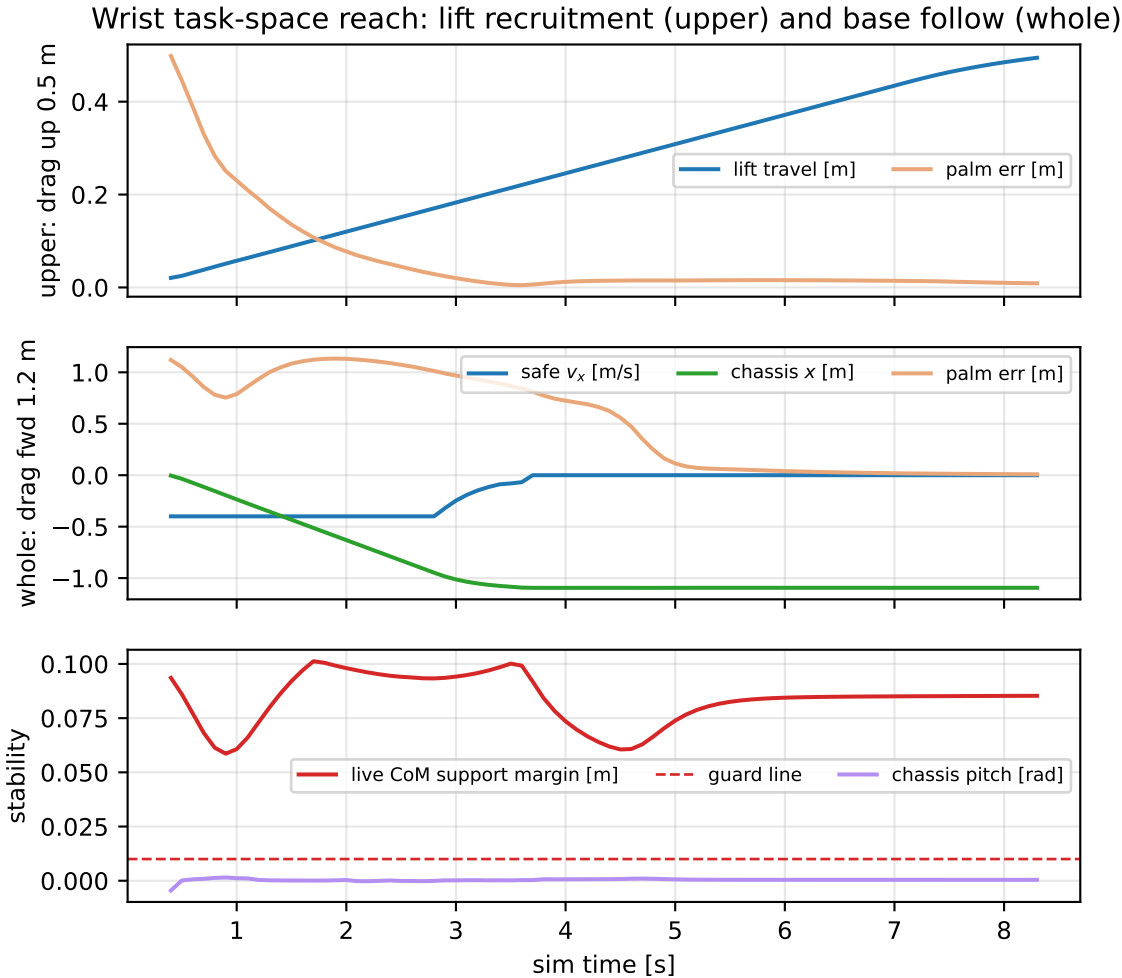
Wrist task-space reach: lift recruitment (upper) and base follow (whole)
upper: drag up 0.5 m
0.0
0.2
0.4
lift travel [m]
palm err [m]
whole: drag fwd 1.2 m
1.0
0.5
0.0
−0.5
−1.0
safe $v_x$ [m/s]
chassis $x$ [m]
palm err [m]
stability
0.100
0.075
0.050
0.025
0.000
live CoM support margin [m]
guard line
chassis pitch [rad]
1
2
3
4
5
6
7
8
sim time [s]