

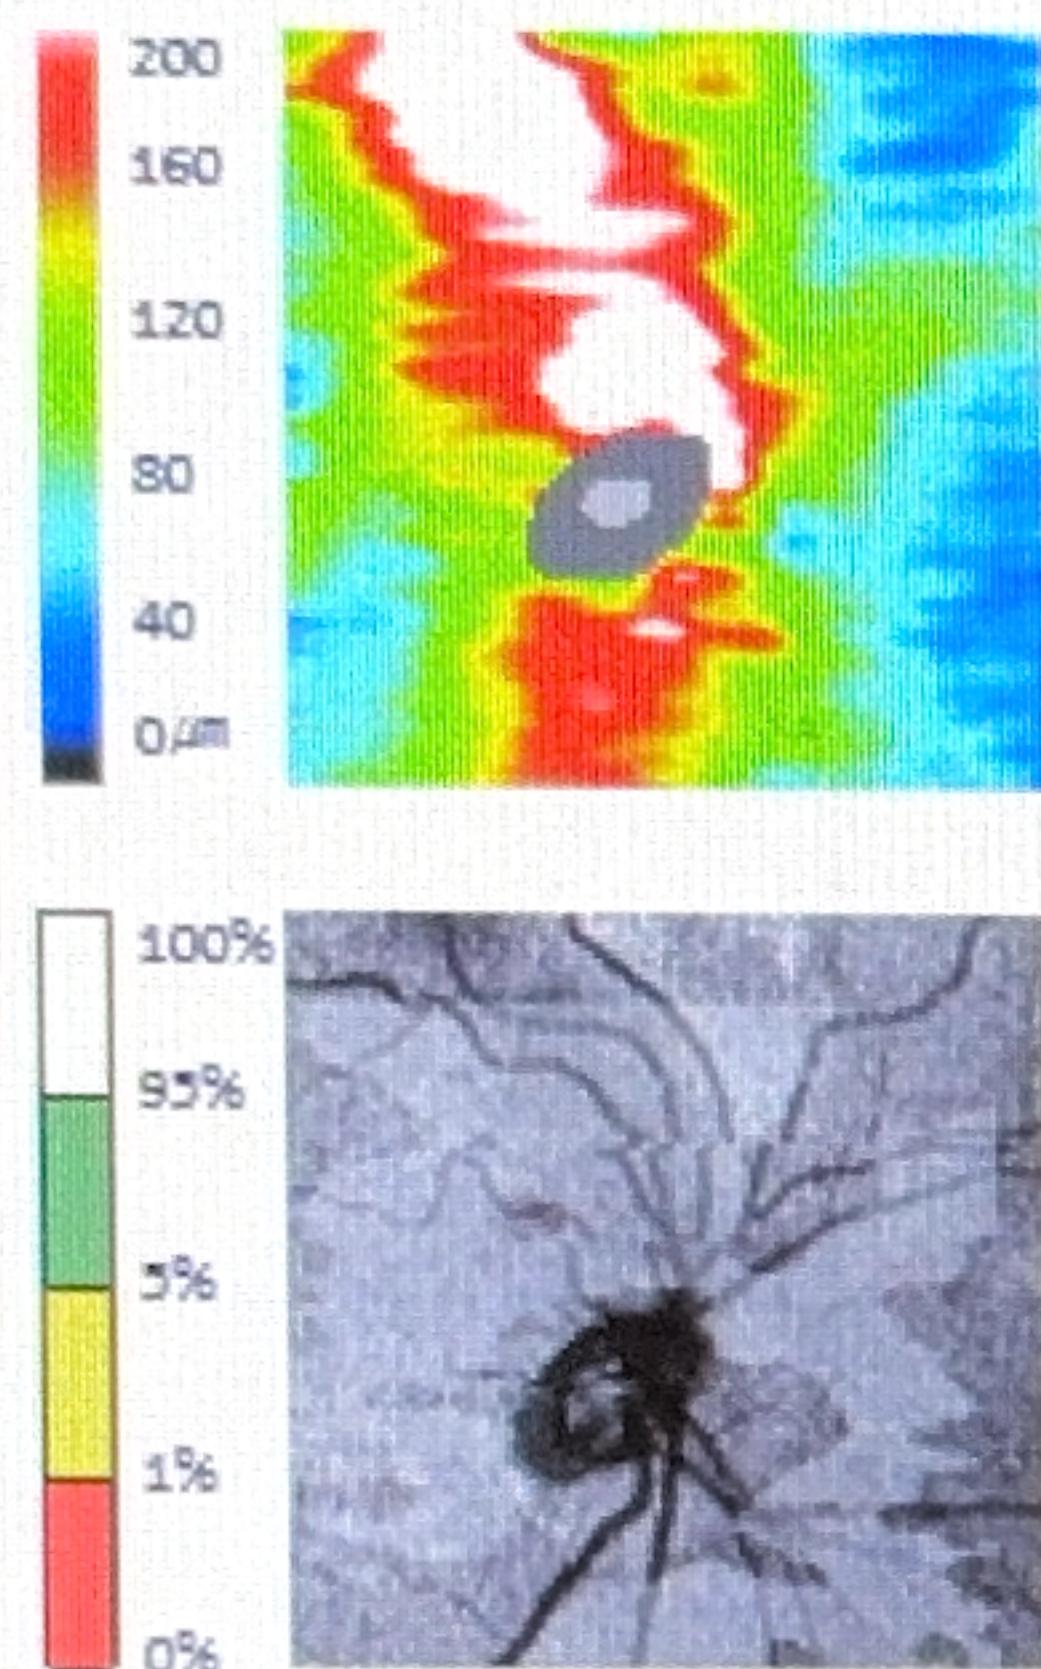


SSI : 3/10


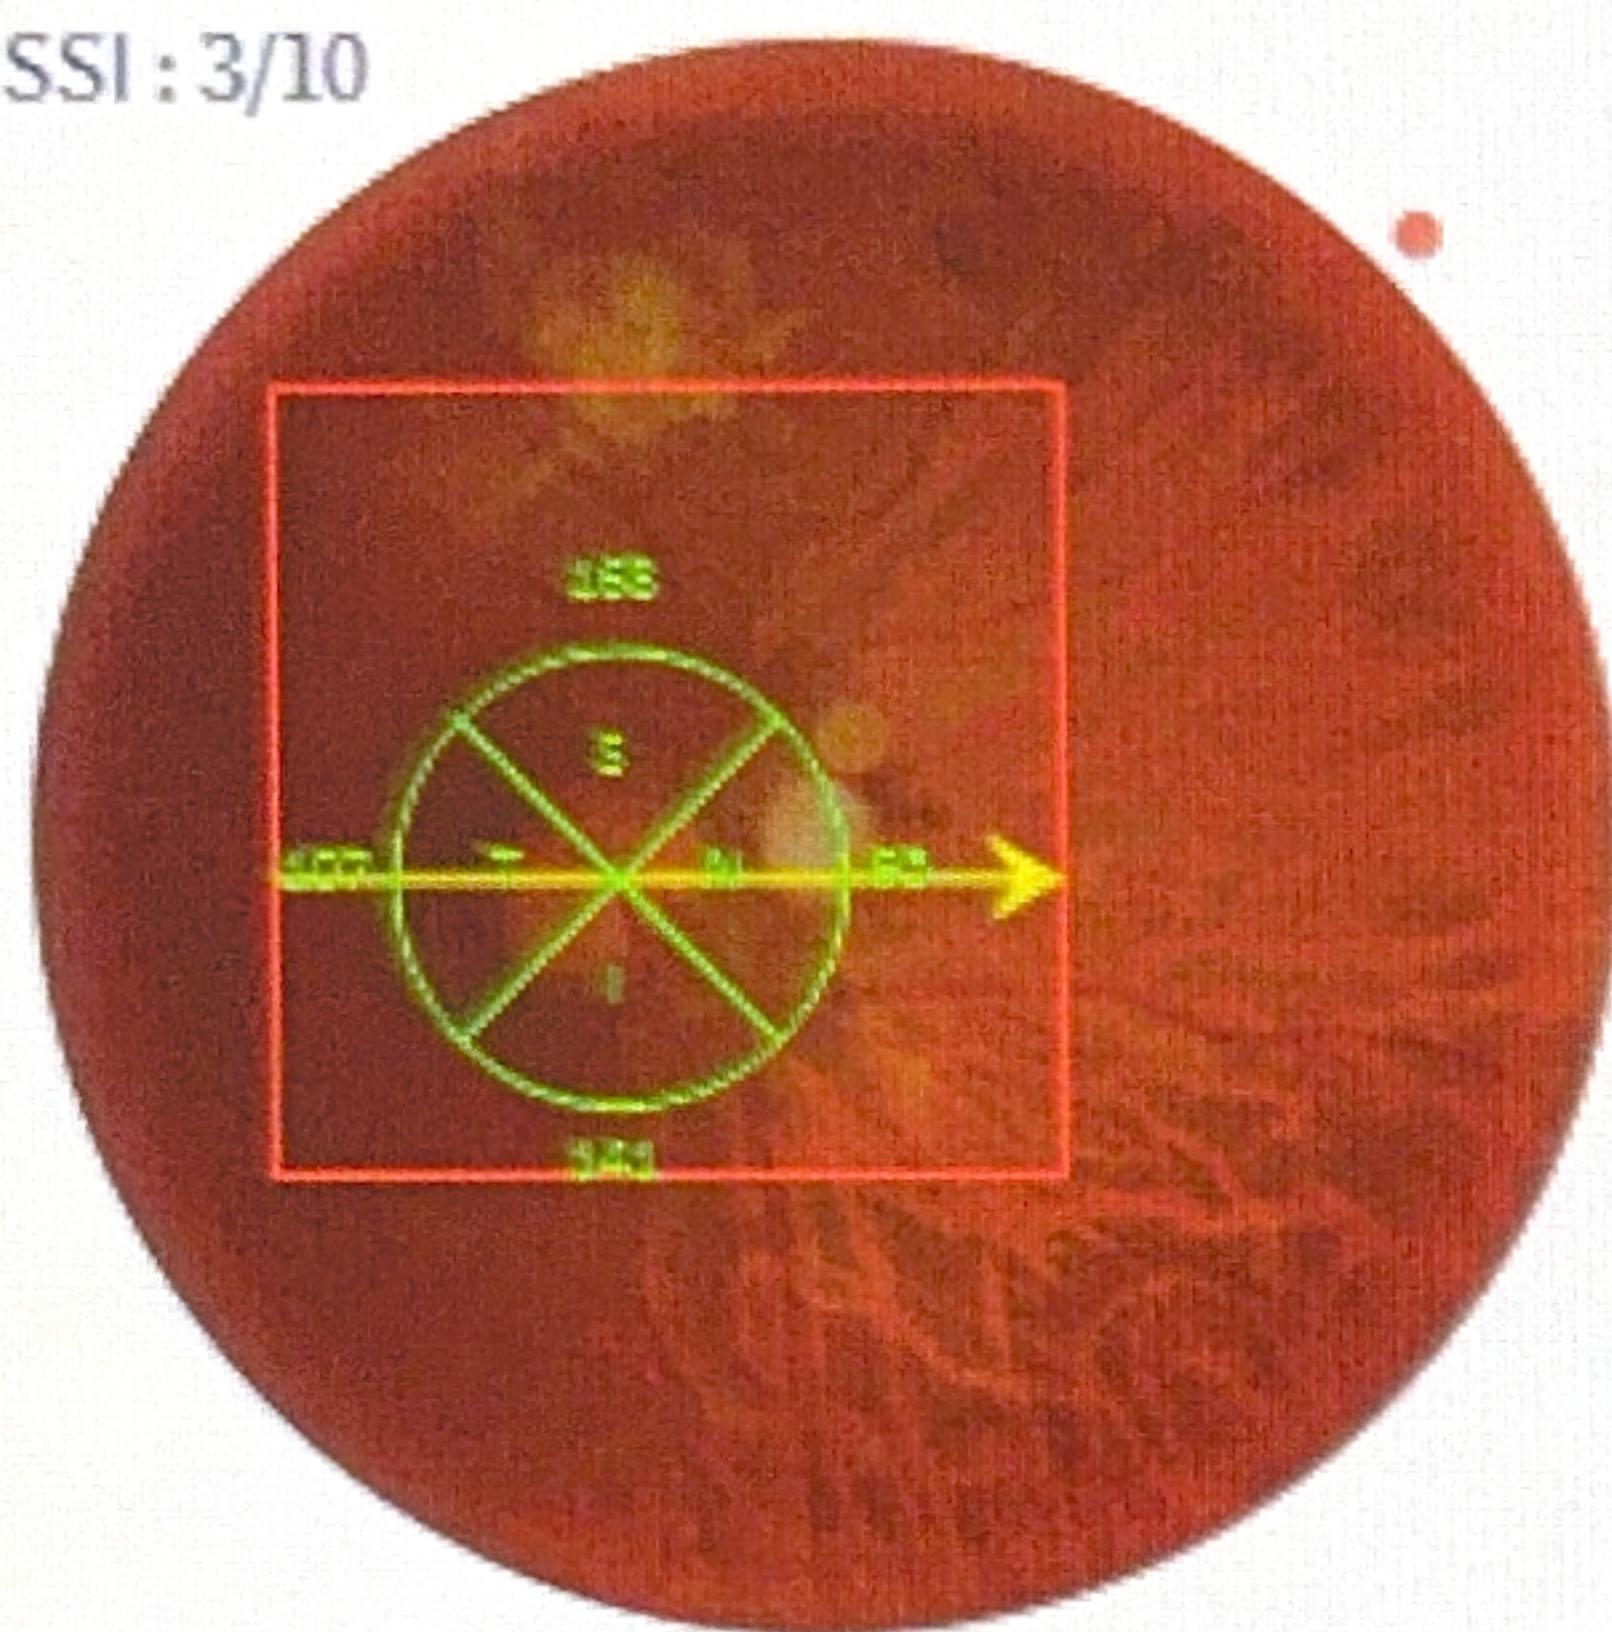


OD

RNFL Quadrant

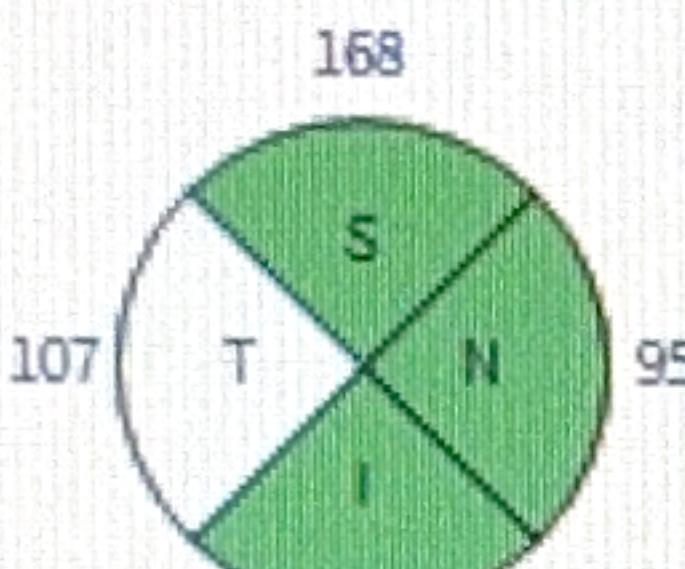


RNFL Clock Hours

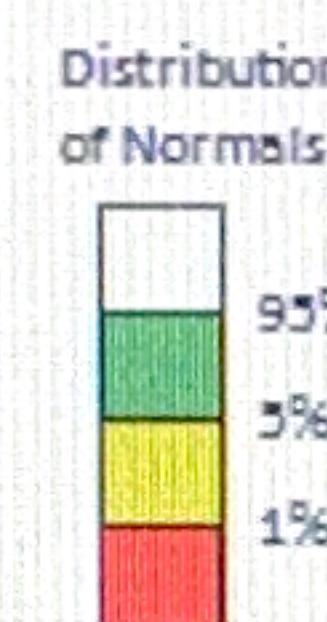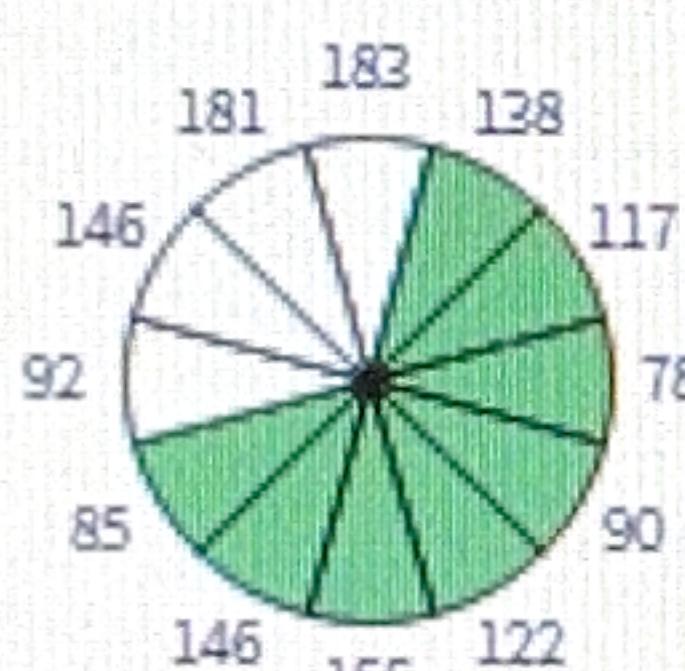


OS



RNFL Quadrant

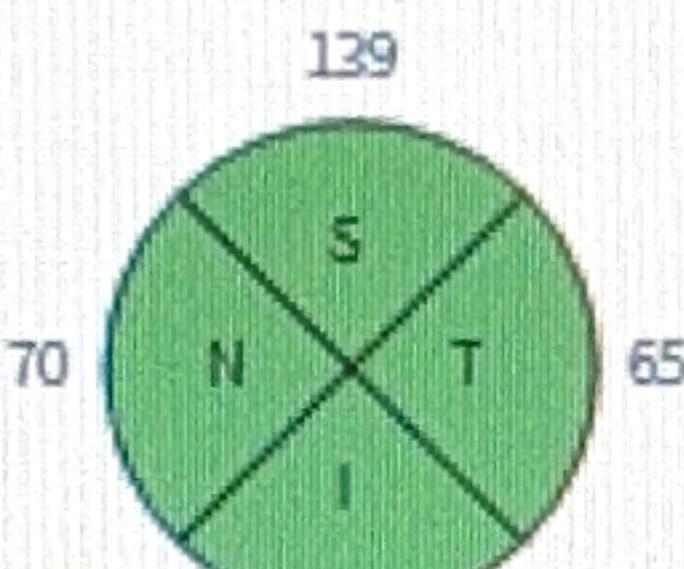


RNFL Clock Hours

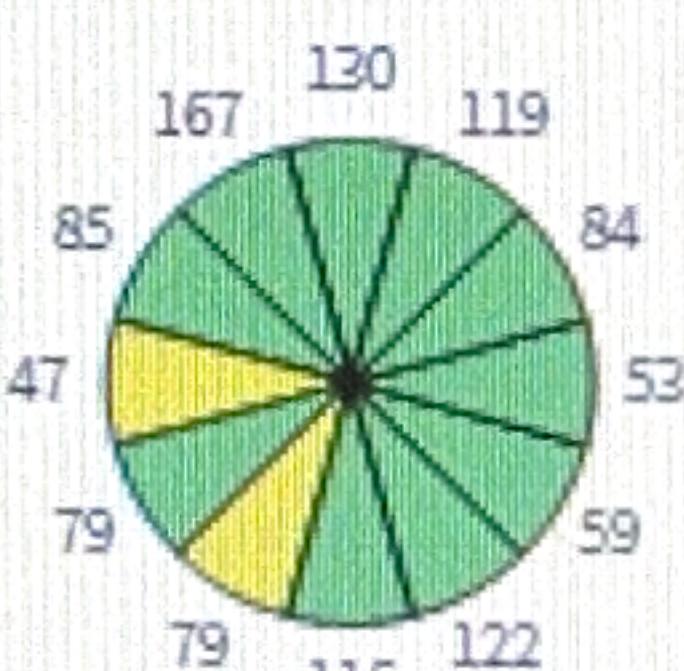

SSI : 3/10

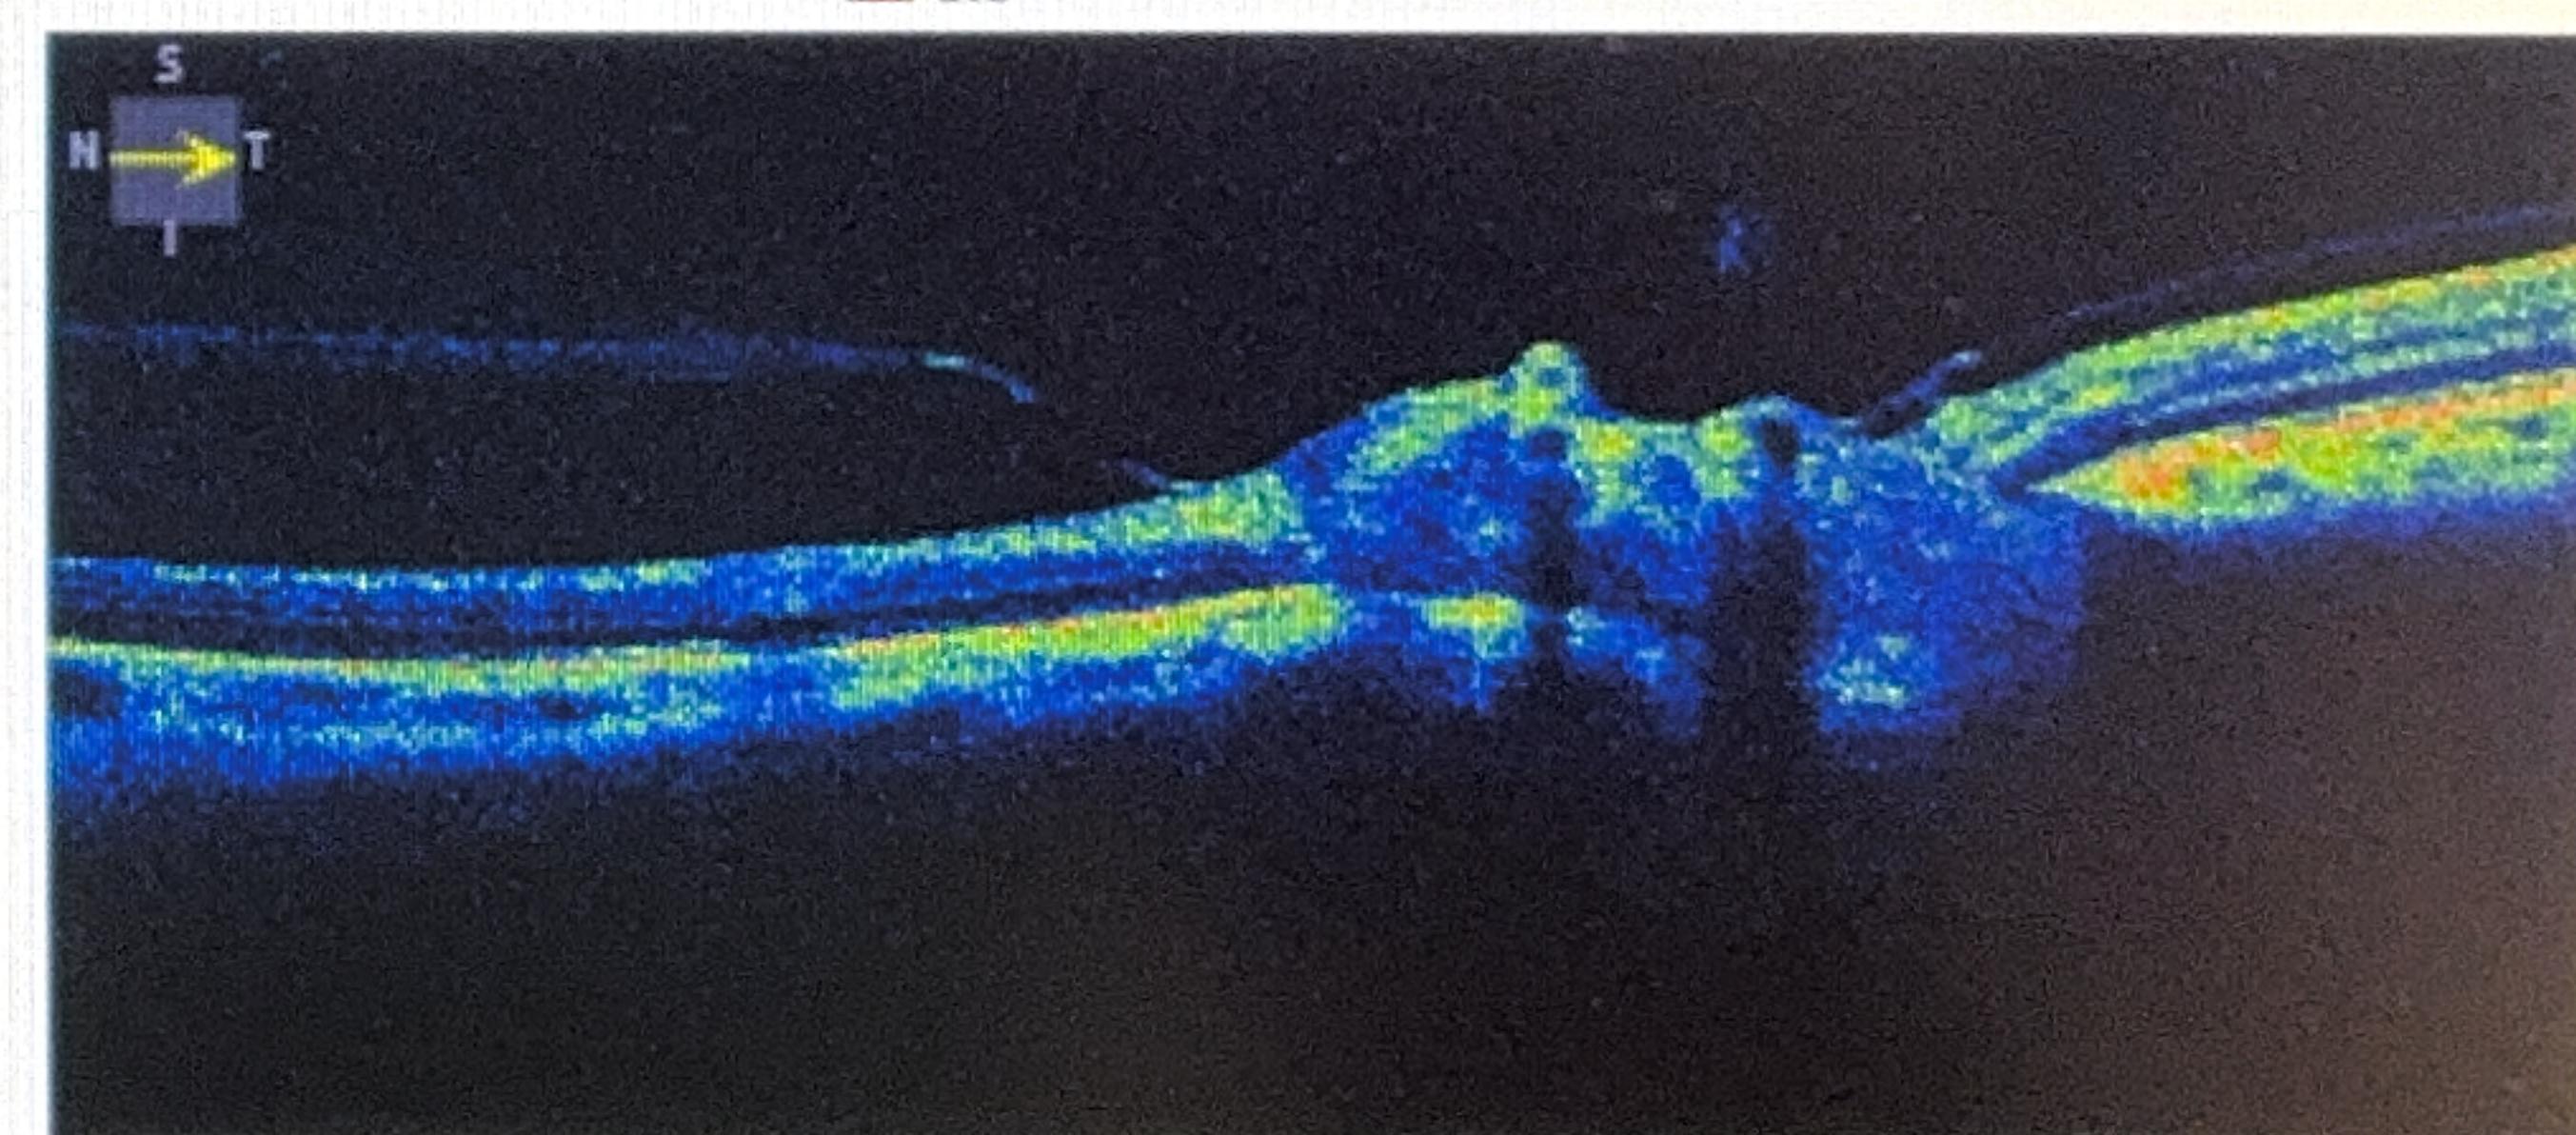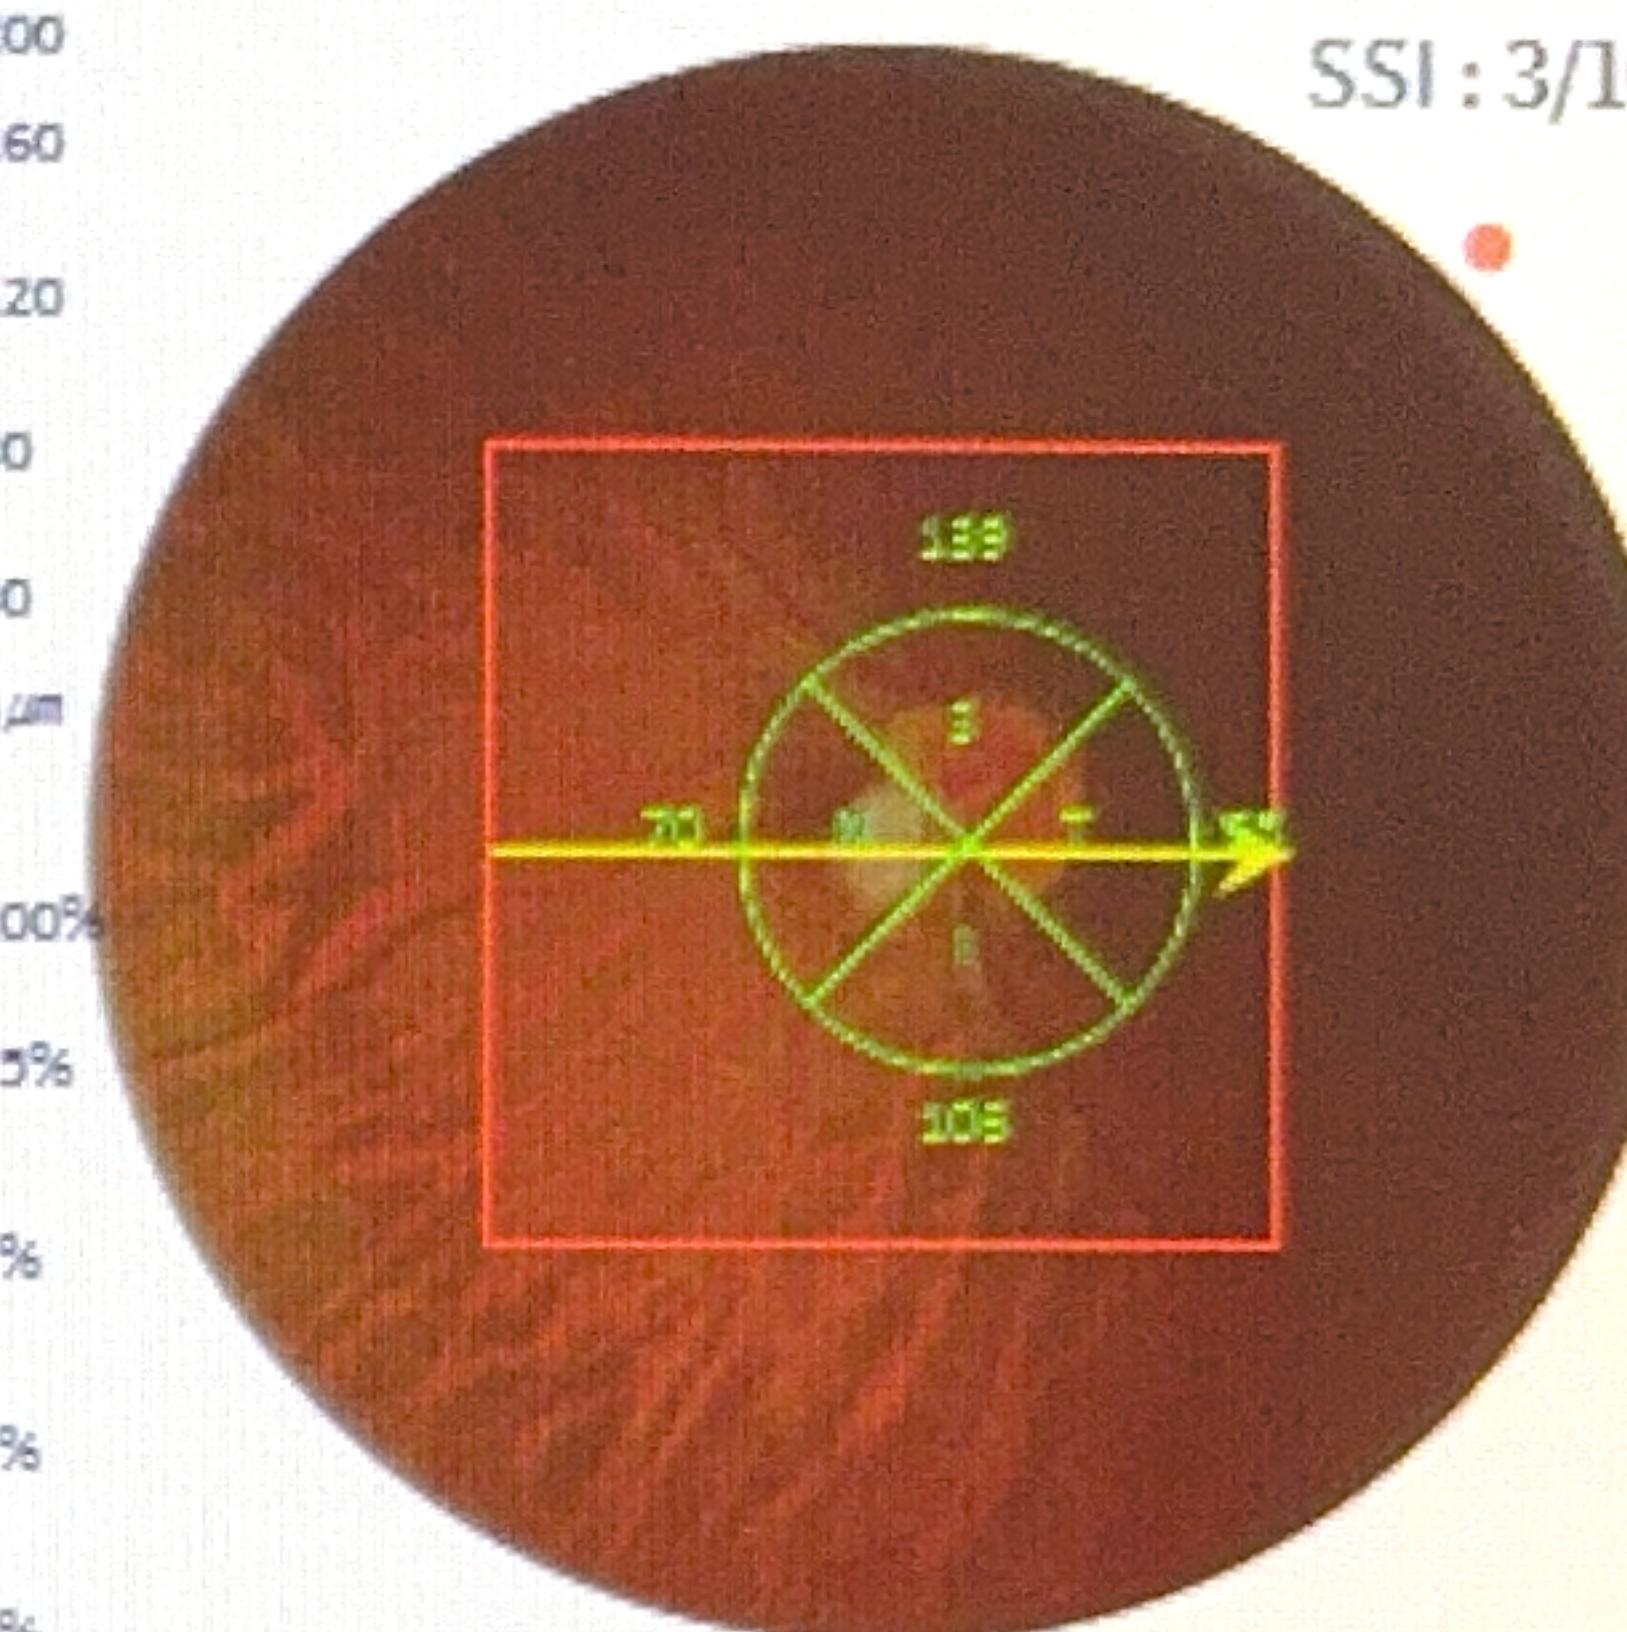

TSNIT

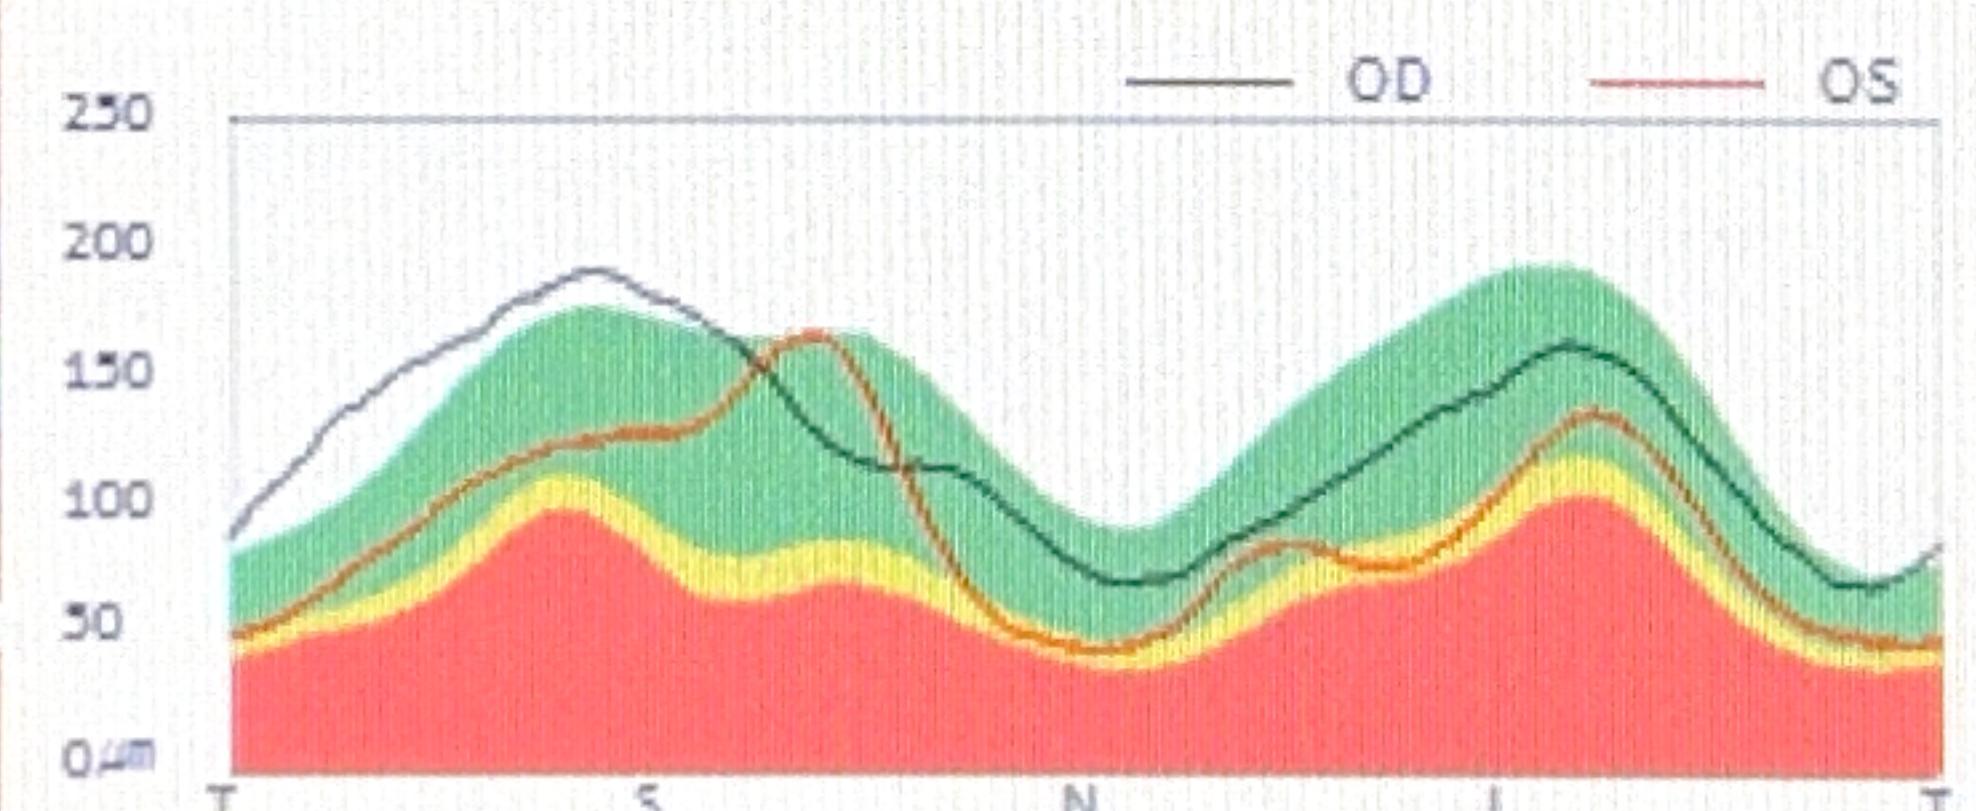

OD OS

| Norm | Summary | Norm |
|--------------|------------------|--------------|
| 0.64-1.00 | RNFL Sym. (%) | 0.64-1.00 |
| 97.45-124.97 | RNFL Avg. (μm) | 97.45-124.97 |
| 0.21-0.75 | C/D Ratio (Vert) | 0.21-0.75 |
| 0.04-0.53 | C/D Ratio (Area) | 0.04-0.53 |
| 1.15-2.56 | Rim Area (mm) | 1.15-2.56 |
| 1.97-3.27 | Disc Area (mm) | 1.97-3.27 |
| 0.00-0.41 | Cup Vol. (mm) | 0.00-0.41 |

Comments

Signature

Info.