



Framework Laptop 16" Keyboard Replacement

Use this guide to replace the keyboard in your...

Written By: Alex Diaz-Kokaisl



INTRODUCTION

Use this guide to replace the keyboard in your Framework 16" laptop.


Note: the laptop used in this guide is a generic setup of one US keyboard, one numpad module, and two touchpad spacers. Your setup might vary, but the procedure should remain the same.

Step 1 — Before you begin



- Unplug all cables and fully shut down your laptop.
- ① If your repair requires a spudger, a T5 Torx, or a Phillips screwdriver, you can use the included Framework screwdriver. Whichever works best for you!

Step 2 — Unlock the Input Modules

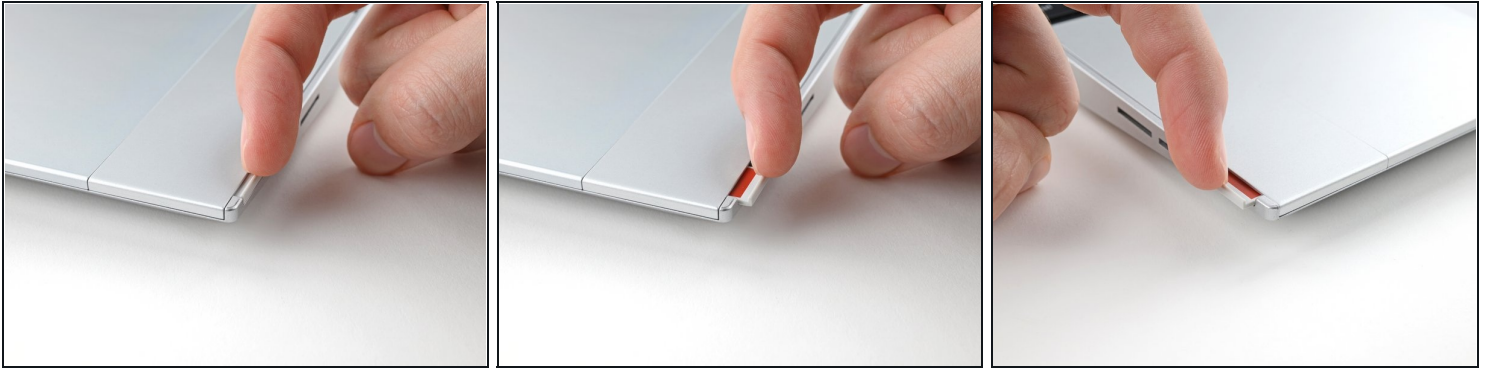

- Use your fingernail to pull out the two Input Module latches and unlock them.
 - ① The latch will show red if it's unlocked.

Step 3 — Remove the touchpad spacers



- Use your fingers to slide the touchpad spacer toward the bottom edge of the laptop and unclip it.
 - ① If you're having trouble, check if the corresponding Input Module latch is properly unlocked.
- Lift the touchpad spacer off the laptop and remove it.

Step 4



- Repeat the same procedure for the other touchpad spacer.

Step 5 — Remove the touchpad



- Use your fingers to slide the touchpad toward the bottom edge of the laptop and disconnect it.
 - ⓘ If you're having trouble, check if the Input Module latches are properly unlocked.
 - Lift the touchpad and remove it.
- ☒ During reassembly, perform the following:
- Place the touchpad flat on its cutout so [its clips](#) are properly aligned.
 - Press the touchpad down and slide it into place so it lines up evenly with the bottom edge of the laptop.

Step 6 — Remove the keyboard



- ⓘ The keyboard is held in place with strong magnets. Apply gradually increasing force to avoid having the keyboard violently eject.
 - Grip the two pull tabs along the bottom of the keyboard.
 - Lift the pull tabs until the keyboard magnets release.
 - Remove the keyboard.
 - ★ During reassembly, make sure the keyboard is seated properly on its [alignment pegs](#) and sits evenly with the edges of the laptop.
-

To reassemble your device, follow these instructions in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [Answers Community](#) for help.