Tech Pack: Football Jersey, Red and Blue Polka Dot, No. 10

Style FC-JSY-010, sample size EU 48. Generated from the fashionINSTA men's knit tee block, adapted for a sublimated match jersey.

Style	FC-JSY-010	**Style name**	Home match jersey, polka dot, No. 10
Client	Football club (name and crest TBC)	**Season**	2026/27 home kit (proposed)
Sample size	EU 48 (Men's M)	**Size range**	EU 44 to 58 (graded set pending)
Pattern source	fashionINSTA MCP, pattern id 1598	**Draft basis**	Kim & Kim, Patternmaking for Menswear, knit sloper (classic fit)
Fabric	100 % recycled polyester interlock, ~140 gsm, white, sublimation grade	**Decoration**	Full-panel dye sublimation (print, then cut and sew)
Date	14 Oct 2026	**Revision**	v1.0, first draft block, not fit-tested

1. Design: front and back




FRONT BACK

Silhouette: classic knit fit with 10.2 cm total chest ease before stretch reduction, set-in short sleeve, crew neck with a navy rib collar, extended body length (28 cm below waist) so the jersey stays tucked during play. Ground is white with red and blue polka dots in alternating half-drop rows. Number 10 in navy with a white outline, front and back. Sleeve hems carry a solid navy printed band.

Status: v1.0 is a parametric first draft. No sample has been sewn or fit-tested. POMs marked 'confirm' are to be read from the DXF or the first proto.

2. Artwork and colour

Ref	Swatch	Use	Pantone (TCX target)	Hex (screen only)
C1		Ground	Bright White 11-0601	#FFFFFF
C2		Dots, rows A	Red, ~18-1662 (Flame Scarlet family)	#C8102E
C3		Dots, rows B	Royal blue, ~19-4052 (Classic Blue family)	#1D4FA3
C4		Numbers, name, collar, sleeve band	Navy, ~19-3933 (Medieval Blue family)	#0B1F4B

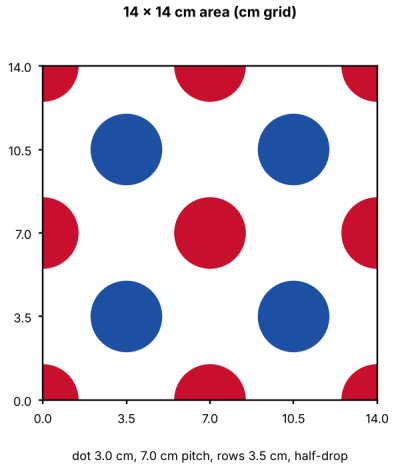

Dot repeat

Rows alternate colour: row A red, row B blue, each row shifted half a pitch (3.5 cm) so every red dot is ringed diagonally by blue. Dot diameter 3.0 cm on a 7.0 cm horizontal pitch with 3.5 cm between rows; repeat cell 7.0 x 7.0 cm.

Print file rules

- Fill each DXF panel with the repeat at 100 % scale, plus 1.5 cm bleed past the cut line.
- Pre-shrink: scale the print file to the paper and fabric shrink measured on a test strip (typically 1 to 3 % for polyester at 200 C), not to the pattern.
- Match dot rows across the side seams and armholes; start the repeat from the same datum on front and back (chest line).
- Numbers and name on separate layers so the No. 10 file can be swapped per player.
- Output 150 dpi minimum at size, sRGB-to-printer profile from the sublimation house.

3. Graphic placement

Element	Size	Placement (garment flat, sample EU 48)	Method
Polka dot ground	Dot dia 3.0 cm, pitch 7.0 cm, row step 3.5 cm, half-drop	All-over on front, back and both sleeves; pattern aligned at CF and CB so a dot column sits on centre	Sublimation
Front number 10	10 cm tall, 0.5 cm white outline	Centred on CF, top of digits 20 cm below HPS	Sublimation (team kit) or heat transfer (retail personalisation)
Club crest	7.5 x 9 cm	Wearer's left chest, crest centre 9 cm from CF, top 17 cm below HPS	Sublimated, or woven/TPU badge heat-applied
Sponsor zone	Max 30 x 7 cm	Centred on CF, top edge 5 cm below the front number	Reserved; artwork TBC
Player name	Letters 7.5 cm tall, block caps	Centred on CB, top edge 7 cm below CB neck seam	Heat transfer or sublimation
Back number 10	25 cm tall, 0.8 cm white outline	Centred on CB, top of digits 4 cm below name	Sublimation or heat transfer
Sleeve band	3 cm solid C4	Bottom 3 cm of each sleeve (2 cm turns under as hem)	Sublimation
Dot clearance	1.0 cm white knock-out	Around number, name and crest so dots never cut into the outlines	In print file

4. Points of measure, sample size EU 48

All measures in cm, garment flat and relaxed, after sublimation and pressing. Body chart: Burgo male standard size 48.

POM	Point of measure	How to measure	Spec, EU 48 (cm)	Tol (cm)	Source
A	Chest width, 2.5 cm below armhole	Flat, side seam to side seam	50.5	+/- 1.0	chest/2 + 5.1 ease, x 0.95 stretch reduction
B	Hem width	Flat, edge to edge at hem	50.5	+/- 1.0	straight side seam assumed; confirm from DXF
C	Body length, HPS to hem	HPS straight down to hem edge	confirm	+/- 1.0	length below waist set to 28; HPS-to-waist from DXF
D	Across back width	Half, at back armhole level	19.5	+/- 0.5	chest/6 + 3.5, x 0.95
E	Shoulder seam length	HPS to shoulder point	confirm	+/- 0.5	from DXF
F	Armhole length, curved	Along seam, total front + back	48.0	+/- 0.5	drafting record
G	Sleeve length, cap top to hem	Cap top straight to hem	21.6	+/- 0.5	sleeve_length_cm option
H	Bicep width	Flat, 2.5 cm below underarm	19.3	+/- 0.5	bicep 38.5 / 2 (before x1.017 cap scaling)
I	Sleeve opening	Flat, edge to edge at hem	confirm	+/- 0.5	from DXF
J	Sleeve cap height	Cap top to bicep line	14.5	+/- 0.3	armhole/4 + 1.9
K	Neck width, seam to seam	HPS to HPS	confirm	+/- 0.5	from DXF
L	Front neck drop	HPS line to CF neck seam	confirm	+/- 0.5	curve guide 2.05 plus 0.8 CF drop
M	Neckline length, total	Along seam, full circumference	50.0	+/- 0.5	half neckline 25.0
N	Collar finished width	Seam to fold	1.9	+/- 0.2	cut 3.8 folded (band_width 2.0 x 0.95)
O	Collar cut length, total	Flat, before CB join	42.6	+/- 0.3	neckline x 0.85 (half 21.3)
P	Collar shoulder notch	From CB along band	9.0	+/- 0.2	drafting record
Q	Body hem, finished	Turned hem	2.0	+/- 0.2	proposed finish
R	Sleeve hem, finished	Turned hem inside navy band	2.0	+/- 0.2	proposed finish

Polyester interlock usually stretches less than cotton/elastane jersey. The 5 % stretch reduction in the draft assumes a fabric with roughly 20 % or more width stretch; if the chosen interlock tests lower, regenerate the block with stretch_reduction_pct set to 0 to 2 so the jersey does not fit tight at chest and bicep.

5. Bill of materials

#	Component	Spec	Placement	Qty / consumption	Supplier
1	Main fabric	100 % recycled polyester interlock (or birdseye mesh), ~140 gsm, white, moisture-wicking finish, sublimation grade	Front, back, sleeves	~1.2 m at 160 cm width (confirm from marker)	TBD
2	Collar rib	1x1 polyester rib, ~200 gsm, navy C4 solid dyed, 50 %+ stretch	Collar	3.8 x 45 cm per garment	TBD
3	Sublimation paper and ink	Disperse dye ink, 100 gsm transfer paper	Print of all body panels	~1.6 m2 printed area	Print house
4	Thread	100 % polyester textured (wooly) in loopers, spun poly Tex 27 in needles, white	All seams	~130 m	Coats / A&E; equivalent
5	Back neck tape	1 cm polyester tape, navy	Shoulder to shoulder, back neck	~20 cm	TBD
6	Neck label	Heat-transfer printed, tagless, navy ink: club mark, size, content	CB inside neck	1	TBD
7	Care label	Printed satin, 30 x 60 mm	Left side seam, 10 cm above hem	1	TBD
8	Crest badge (if not sublimated)	TPU or woven, 7.5 x 9 cm	Left chest	1	TBD
9	Name and number (if transfer)	Flex PU heat transfer, navy with white outline	Back, front	1 set	TBD
10	Polybag + hangtag	Recycled LDPE 30 x 40 cm, 300 gsm card tag	Pack	1 each	TBD

BOM entries are proposals pending sourcing.

6. Cutting

Piece	Qty	Fabric	Grain / fold	Notes
Front	1	Main, printed	Cut 1 on fold at CF (or unfolded full panel for print), lengthwise grain	Print full panel mirrored about CF so dots align on centre
Back	1	Main, printed	As front, fold at CB	Name and number layer on this panel
Sleeve	2	Main, printed	Cut a pair, grain along sleeve centre	Navy band at hem; front single notch, back double
Collar	1	Rib, navy	Cut 1 on fold at CF, rib along the length	Notches 9.0 from CB, CB join

7. Construction

Step	Operation	Machine / stitch	Notes
1	Print and calendar	Sublimate panels on roll or by blanks, 200 C, 30 to 45 s	Check colour vs C1 to C4 standards before cutting
2	Cut	Laser or vision-cut to printed outline	Hold dot alignment at CF, CB and seam lines
3	Join shoulders	4-thread overlock, 0.6 cm, with clear elastic	Prevents shoulder growth
4	Collar	Join ends at CB, fold, quarter-mark (CB, CF, notches 9.0 from CB), stretch onto 50.0 cm neckline, 4-thread overlock	Band is 85 % of neckline
5	Back neck tape	Tape shoulder to shoulder over neck seam, single-needle edge stitch	Ends caught in shoulder seams
6	Set sleeves flat	4-thread overlock, zero ease, match cap top to shoulder	Match dot rows across armhole where possible
7	Side and underarm seam	4-thread overlock hem to sleeve hem in one pass	Care label in left side seam
8	Hems	2-needle coverstitch, 6 mm gauge, 2.0 cm turned, body and sleeves	White thread on body, navy on sleeve band
9	Decorate (if not sublimated)	Heat-press crest, name, number at 150 C, 12 s	Use placement jig from section 3
10	Inspect and pack	Measure against POM, AQL 2.5	Fold to 30 x 40 cm, number facing out

Seam allowance: check whether the DXF includes it before making the print file. If net, add 0.6 cm on overlock seams and 2.0 cm on hems, and extend the print bleed past the new cut line.

8. Grading and personalisation

Only EU 48 is drafted. The block is parametric on chest, arm length and height, so the size run should come from generate_size_set on the men's chart (44 to 58) or the club's own chart via import_size_chart. Keep the dot repeat at fixed scale across sizes (do not grade the dots); grade number height only between youth and adult (adult front 10 cm, back 25 cm).

9. Open items before proto

- Club name, crest artwork and sponsor artwork.
- Confirm from DXF: HPS-to-hem length, shoulder, neck width, front drop, sleeve opening, seam allowance.
- Test the chosen interlock for stretch and sublimation shrink; adjust stretch_reduction_pct and print scale.
- Lab dips or print strike-offs for C2, C3 and C4.
- Check league or competition rules on number size, contrast and sleeve badges before finalising.
- Sew one EU 48 proto, fit, then lock POMs and generate the size set.

10. Sign-off

Role	Name	Date	Signature
Pattern / tech design			
Print / sublimation			
Production			
Club approval			