Tech Pack: Crew Tee, Classic Fit, Short Sleeve

Knitwright, style KW-TEE-001, sample size EU 48. Generated from the fashionINSTA men's knit tee block.

Style	KW-TEE-001	**Style name**	Crew Tee, classic fit, short sleeve
Brand	Knitwright	**Season**	Core / carryover
Sample size	EU 48 (Men's M)	**Size range**	EU 44 to 58 (graded set pending)
Pattern source	fashionINSTA MCP, pattern id 1597	**Draft basis**	Kim & Kim, Patternmaking for Menswear, knit sloper (classic)
Fabric	Single jersey, ~180 gsm, 95/5 cotton/elastane (proposed)	**Stretch allowance**	5 % stretch reduction applied to every piece
Date	14 Oct 2026	**Revision**	v1.0, first draft block, not fit-tested

1. Flat sketch

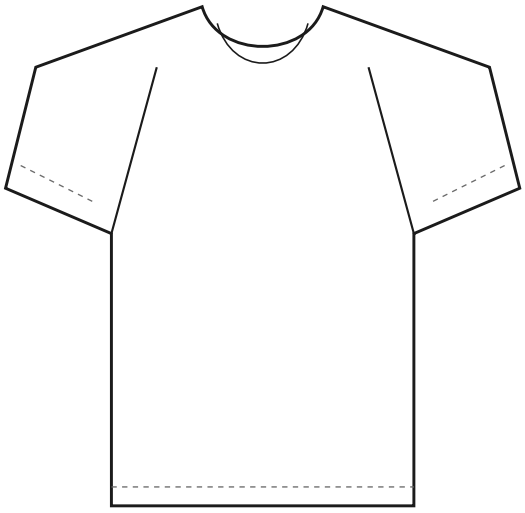

FRONT

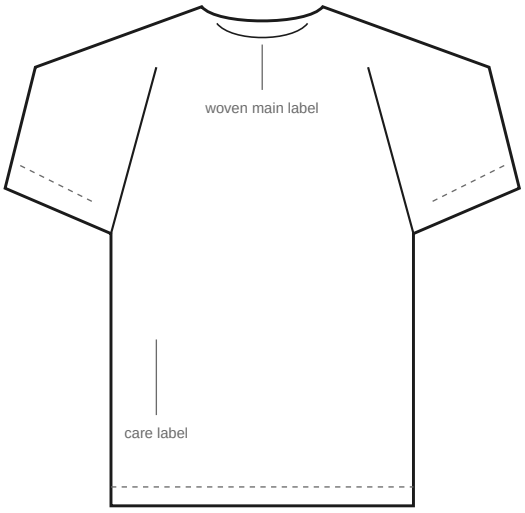

BACK

Silhouette: classic (not slim) knit fit, 10.2 cm total chest ease before stretch reduction, set-in short sleeve, round crew neck finished with a folded rib neckband 2.2 cm wide, plain turned hem at body and sleeve. Four pattern pieces: front, back, sleeve, neckband.

Status: v1.0 is a first draft block produced parametrically. No physical sample has been sewn or fit-tested. Points marked 'confirm' must be measured from the DXF or the first proto before this pack goes to bulk.

2. Points of measure, sample size EU 48

All measures in cm, garment laid flat and relaxed, measured after wash where the fabric spec requires pre-shrink. Body chart: Burgo male standard, size 48 (chest 96, derived from the draft).

POM	Point of measure	How to measure	Spec, EU 48 (cm)	Tol (cm)	Source
A	Chest width, 2.5 cm below armhole	Flat, side seam to side seam	50.5	+/- 1.0	chest 96 / 2 + 5.1 ease, x 0.95 stretch reduction
B	Hem width	Flat, edge to edge at hem	50.5	+/- 1.0	straight side seam assumed; confirm from DXF
C	Body length, HPS to hem	High point shoulder straight down to hem edge	confirm	+/- 1.0	waist-to-hem 24.7 (height/8 + 1.3); HPS-to-waist from DXF
D	Across back width	Half, at back armhole level	19.5	+/- 0.5	chest/6 + 3.5, x 0.95
E	Shoulder seam length	HPS to shoulder point	confirm	+/- 0.5	from DXF
F	Armhole length, curved	Along seam, shoulder point to underarm	24.0 (each half), 48.0 total	+/- 0.5	drafting record
G	Sleeve length, cap top to hem	Cap top straight to sleeve hem	21.6	+/- 0.5	sleeve_length_cm option
H	Bicep width	Flat, 2.5 cm below underarm	19.3	+/- 0.5	bicep 38.5 / 2 (pre-scale; sleeve scaled x1.017 across cap)
I	Sleeve opening	Flat, edge to edge at hem	confirm	+/- 0.5	from DXF
J	Sleeve cap height	Cap top to bicep line	14.5	+/- 0.3	armhole/4 + 1.9
K	Neck width, seam to seam	HPS to HPS at neck seam	confirm	+/- 0.5	from DXF
L	Front neck drop, HPS to CF seam	HPS line down to CF neck seam	confirm	+/- 0.5	front neck curve guide 2.05; extra CF drop 0.8
M	Neckline length, total	Along seam, full circumference	51.0	+/- 0.5	half neckline 25.5
N	Neckband finished width	Seam to fold	2.2	+/- 0.2	drafting record
O	Neckband cut length, total	Flat, before joining at CB	38.2	+/- 0.3	neckline x 0.75 (half 19.1)
P	Neckband cut height	Flat, before folding	4.2	+/- 0.2	drafting record
Q	Hem height, body	Turned hem, finished	2.0	+/- 0.2	proposed finish (not in draft)
R	Hem height, sleeve	Turned hem, finished	2.0	+/- 0.2	proposed finish (not in draft)

Shoulder notch on neckband: 8.1 cm from CB on each side. Sleeve cap: zero ease, cap scaled x1.017 across to match the 48.0 cm armhole. Sleeve slants: front armhole minus 1.3, back minus 1.0.

3. Bill of materials

#	Component	Spec	Placement	Consumption / qty	Supplier
1	Main fabric	Single jersey, 95/5 cotton/elastane, ~180 gsm, 30s combed ring-spun, 20 to 25 % width stretch, tubular or open width	Front, back, sleeves	~1.1 m at 180 cm open width, size 48 (confirm from marker)	TBD (Sialkot / Faisalabad mill)
2	Rib	1x1 rib, same fibre blend as main, ~220 gsm, 50 %+ stretch with recovery	Neckband	4.2 x 40 cm strip per garment	TBD
3	Neck tape	Self-fabric bias or 1 cm twill tape	Back neck, shoulder to shoulder over neckband seam	~55 cm	TBD
4	Sewing thread	100 % spun polyester, Tex 27 (120/2), matching main	All seams	~120 m	Coats / A&E; equivalent
5	Main label	Woven damask, 40 x 20 mm folded, Knitwright wordmark	CB inside, on neck tape	1	TBD
6	Size label	Woven, 15 x 20 mm, EU and alpha size	Under main label	1	TBD
7	Care label	Printed satin, 30 x 60 mm, fibre content + care + origin	Left side seam inside, 10 cm above hem	1	TBD
8	Hangtag + string	300 gsm card, 50 x 90 mm	Left underarm	1	TBD
9	Polybag	Recycled LDPE with warning print, self-seal, 25 x 35 cm	Individual pack	1	TBD

All BOM entries are proposals pending sourcing. Fabric stretch must match the 5 % stretch reduction built into the pattern; a fabric with materially less stretch will fit tight at chest and bicep.

4. Construction

Step	Operation	Machine / stitch	SPI / notes
1	Join shoulders	4-thread overlock, 0.6 cm seam, with clear elastic or tape in seam	10 to 12 SPI; tape prevents shoulder stretch
2	Prepare neckband	Join short ends with overlock to form a ring, press flat; fold lengthwise WS together	Seam sits at CB
3	Attach neckband	4-thread overlock, quarter-marked (CB seam, CF fold, shoulder notches 8.1 from CB); band stretched evenly to 51.0 cm neckline	Band is 75 % of neckline
4	Neck tape / topstitch	Coverstitch 2-needle (6 mm) around neck seam, or back-neck tape shoulder to shoulder then single-needle topstitch	Tape ends enclosed in shoulder seams
5	Set sleeves (flat)	4-thread overlock, cap to armhole, match cap top to shoulder seam and underarm notches; zero ease	Front and back of sleeve are not symmetric, follow notches
6	Close side seam and underarm in one pass	4-thread overlock from hem to sleeve hem, match armhole seam	Insert care label at left side, 10 cm from hem
7	Hem sleeves	2-needle coverstitch, 6 mm gauge, 2.0 cm turned hem	Chain side inside
8	Hem body	2-needle coverstitch, 6 mm gauge, 2.0 cm turned hem	Start and finish at side seam, overlap 1.5 cm
9	Trim, inspect, press	Steam press on form, no crease at side seams; check POM table	AQL 2.5 inline

Seam allowances: confirm what is in the DXF before cutting. If the export is net (no allowance), add 0.6 cm on all overlock seams and 2.0 cm on body and sleeve hems; the neckband is cut to its stated 4.2 x 38.2 cm and needs 0.6 cm at the CB join only if not already included.

5. Cutting

Piece	Qty	Fabric	Grain / fold	Notches
Front	1	Main	Cut 1 on fold at CF, lengthwise grain	Armhole, side seam at waist
Back	1	Main	Cut 1 on fold at CB, lengthwise grain	Armhole, side seam at waist
Sleeve	2	Main	Cut 2 (mirrored), grain along sleeve centre	Cap top, front single / back double, underarm
Neckband	1	Rib	Cut 1 on fold at CF, rib running along the length (greatest stretch along the band)	Shoulder notches 8.1 from CB, CB join

6. Labelling and packing

Main label centred on back neck tape, size label directly below, care label in left side seam 10 cm above hem with content, care symbols, country of origin (Pakistan) and RN/importer line as the destination market requires. Fold to 25 x 35 cm, hangtag at left underarm, one piece per polybag, 10 per inner carton, size and colour sticker on carton end.

7. Grading

Only EU 48 is drafted. The block is parametric on chest, arm length and height, so the correct route to a size run is generate_size_set with the Burgo men's chart (44 to 58) or a Knitwright chart imported through import_size_chart, rather than applying flat grade rules to this one size. Target per-size chest step is 4 cm (2 cm half chest) across the EU range; confirm length and sleeve steps against the generated set before writing a grade table into this pack.

8. Colourways

Code	Main fabric	Rib	Thread	Label
CW1	Black (Pantone 19-0303 TCX)	Black, same	Black	Standard
CW2	Off-white (11-0601 TCX)	Off-white, same	Off-white	Standard
CW3	Heather grey melange	Heather grey, same	Mid grey	Standard

9. Open items before proto

- Confirm from DXF: HPS-to-hem length, shoulder seam, neck width, front neck drop, sleeve opening, and whether seam allowance is included.
- Fabric: source a jersey whose stretch matches the 5 % reduction; re-run the block with stretch_reduction_pct if the chosen fabric differs.
- Neckband ratio 0.75 is the tool default (flagged as still open in the draft); validate on the proto, 0.80 to 0.85 is common for cotton rib.
- Sew one proto in EU 48, fit on a size-48 form or wearer, then lock POMs and tolerances.
- Generate the size set and add the graded POM table.

10. Sign-off

Role	Name	Date	Signature
Pattern / tech design			
Sample room			
Production			
Brand approval (Knitwright)			