



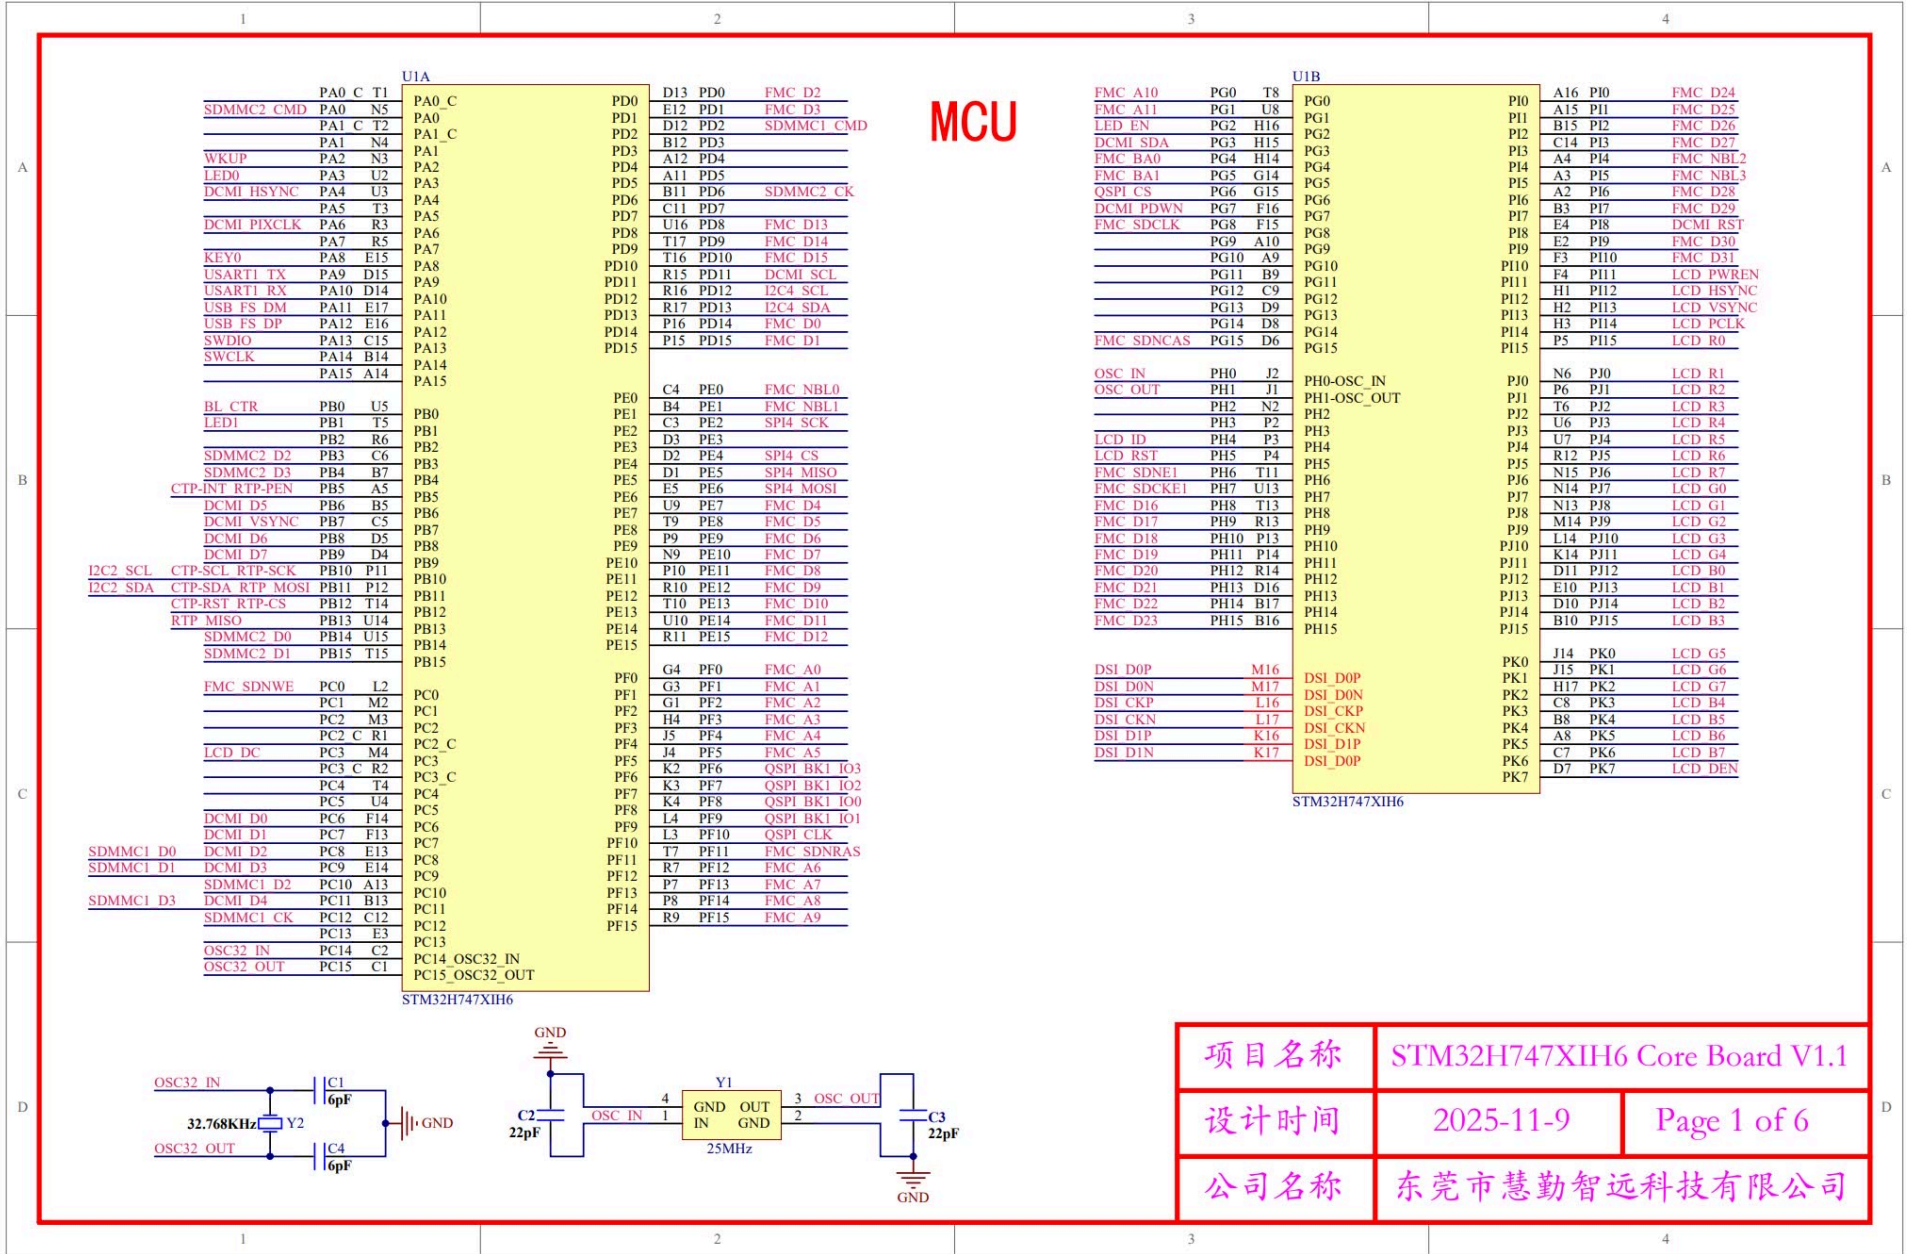

MCU

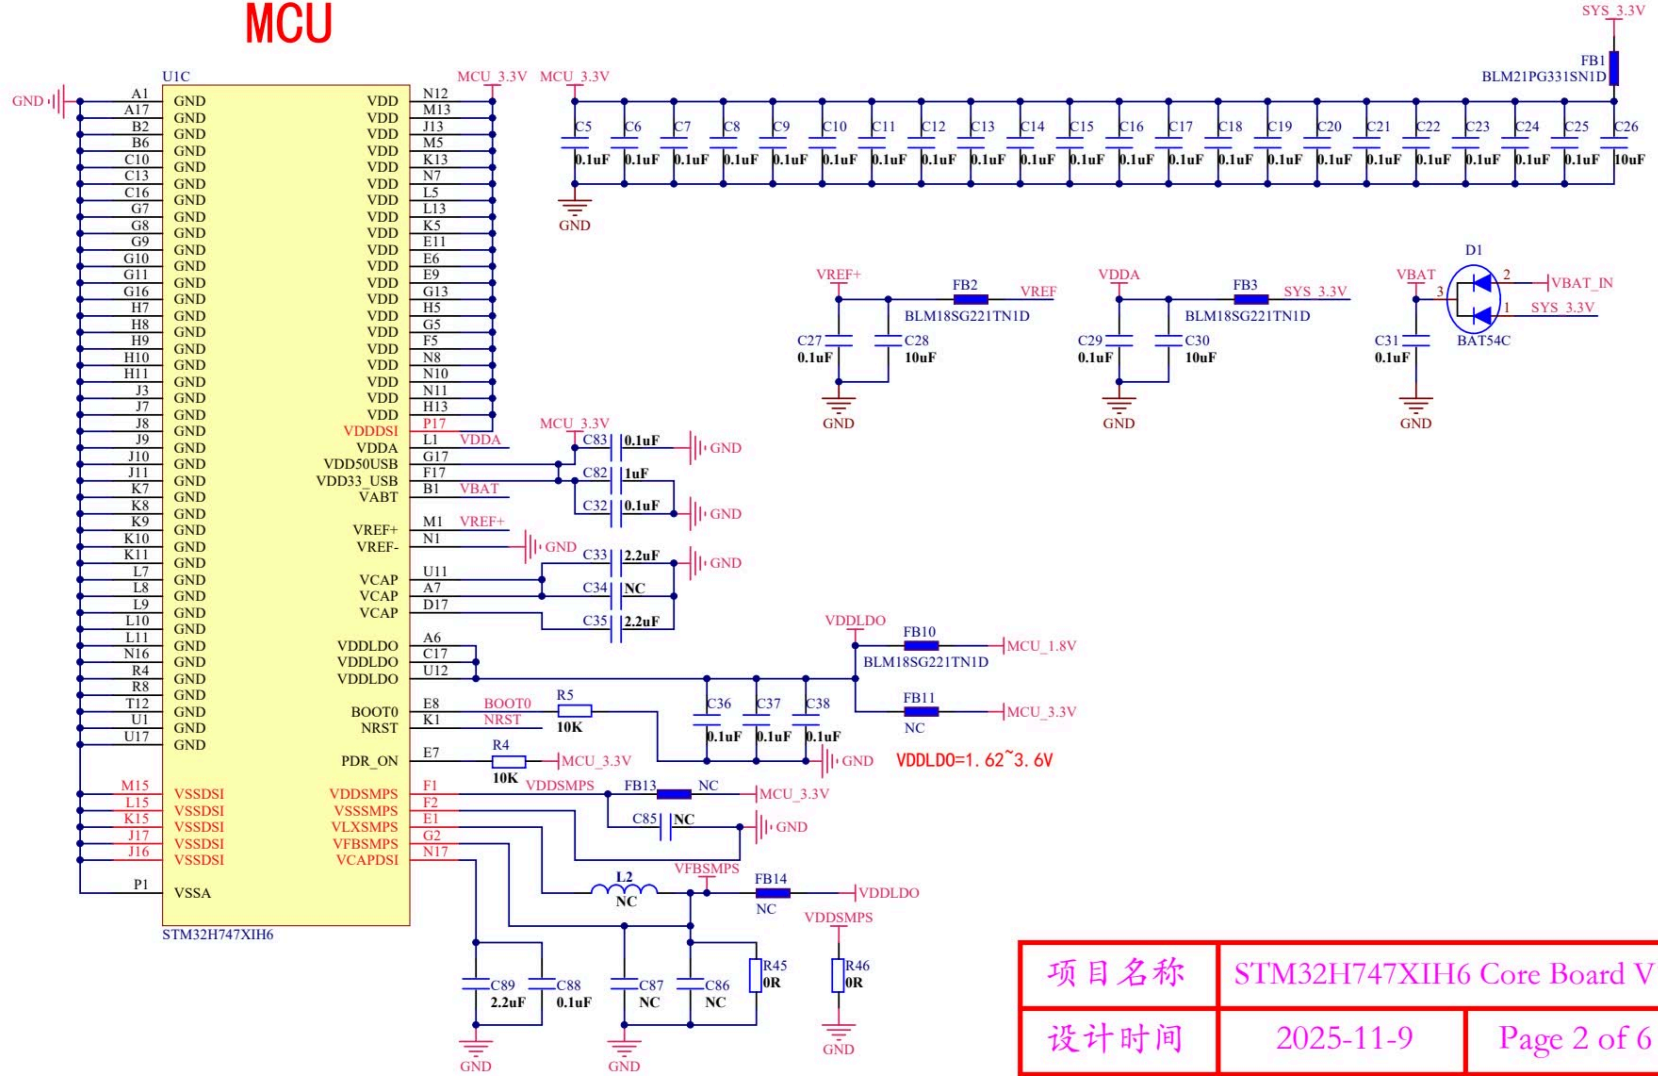

项目名称	STM32H747XIH6 Core Board V1.1	
设计时间	2025-11-9	Page 2 of 6
公司名称	东莞市慧勤智远科技有限公司	

SDRAM

U2

Pin	Function	Pin	Function
A1	FMC D26	DQ26	
A2	FMC D24	DQ24	
A3	VSS	DQ0	
A7	SDRAM 3.3V	VDD	
A8	FMC D23	DQ23	
A9	FMC D21	DQ21	
B1	FMC D28	DQ28	
B2	SDRAM 3.3V	DQ4	
B3	VSSQ	P7	SDRAM 3.3V
B7	SDRAM 3.3V	P3	
B8	VSSQ	P2	SDRAM 3.3V
B9	FMC D19	P1	FMC D11
C1	VSSQ	N9	SDRAM 3.3V
C2	FMC D27	N8	FMC D3
C3	FMC D25	N7	FMC D1
C7	FMC D22	N3	FMC D14
C8	FMC D20	N2	FMC D12
C9	SDRAM 3.3V	N1	
D1	VSSQ	M9	SDRAM 3.3V
D2	FMC D29	M8	FMC D5
D3	FMC D30	DQ5	
D7	FMC D17	DQ6	
D8	FMC D18	DQ9	M3 FMC D9
D9	SDRAM 3.3V	DQ10	M2 FMC D10
E1	SDRAM 3.3V	VSSQ	
E2	FMC D31	VSSQ	
E3	NC	DQ7	
E7	NC	VDD	
E8	NC	VSS	
E9	DQ16	DQ8	
F1	VSSQ	L2	SDRAM 3.3V
F2	FMC NBL3	L7	FMC D7
F3	FMC A3	L3	
F7	FMC A2	L1	SDRAM 3.3V
F8	FMC NBL2	K9	FMC NBL0
F9	SDRAM 3.3V	K8	FMC SDNWE
G1	FMC A4	K9	FMC SDNCAS
G2	FMC A5	K3	
G3	FMC A6	K2	
G7	FMC A10	K1	FMC NBL1
G8	FMC A0	J9	FMC SDNRAS
G9	FMC A1	J8	FMC SDNE1
H1	FMC A7	J7	FMC BA0
H2	FMC A8	J3	FMC A9
H3	NC	J2	FMC SDCKE1
		J1	FMC SDCLK
		H9	FMC A11
		H8	FMC BA1
		H7	

IS42S32800J-7BLI

FB4
BLM21PG331SN1D

SDRAM 3.3V

SYS 3.3V

C44 0.1uF
C45 0.1uF
C46 0.1uF
C47 0.1uF
C48 0.1uF
C49 0.1uF
C50 0.1uF
C51 0.1uF
C52 0.1uF
C53 0.1uF
C54 0.1uF
C55 0.1uF
C56 0.1uF

GND

TF CARD

TF CARD

SYS 3.3V

R6 10K, R7 10K, R8 10K, R9 10K, R10 10K

SDMMC1 D2
SDMMC1 D3
SDMMC1 CMD
SDMMC1 CK
SDMMC1 D0
SDMMC1 D1

GND, SYS 3.3V, C39 0.1uF

TF CARD

1 DAT2
2 CD/DAT3
3 CMD
4 VDD
5 CLK
6 VSS
7 DAT0
8 DAT1
9 CD
10
11
12
13

Micro SD CARD

GND

EEPROM

The diagram shows an EEPROM (U10, BL24C16F) connected to a 3.3V supply and a 12C4 controller. The 3.3V supply is connected to the VCC pin (pin 4) and the WP pin (pin 5) through a 0.1uF capacitor. The GND pin (pin 2) is connected to ground. The SCL pin (pin 1) and SDA pin (pin 3) are connected to the 12C4 controller. The 12C4 controller is connected to the 3.3V supply through a 2.2K resistor (R37) and to ground through a 2.2K resistor (R38).

U10

BL24C16F

12C4 SCL 1

12C4 SDA 3

2

4

5

SCL

VCC

GND

SDA

WP

SYS 3.3V

0.1uF

C84

GND

R37 2.2K

R38 2.2K

QSPI FLASH

The diagram shows the connection of a W25Q256JVEIQ QSPI Flash (U3) to a microcontroller. The flash is connected to a 3.3V supply (SYS_3.3V) and ground (GND). The connections are as follows:

- Pin 1 (CS):** Connected to R11 (10K) and SYS_3.3V.
- Pin 2 (QSPI BK1 IO1):** Connected to QSPI BK1 IO3.
- Pin 3 (QSPI BK1 IO2):** Connected to QSPI BK1 IO3.
- Pin 4 (WP(IO2)):** Connected to GND.
- Pin 8 (VCC):** Connected to SYS_3.3V.
- Pin 7 (HOLD(IO3)):** Connected to QSPI BK1 IO3.
- Pin 6 (QSPI CLK):** Connected to QSPI BK1 IO3.
- Pin 5 (QSPI BK1 IO0):** Connected to QSPI BK1 IO3.
- Pin 9 (DI(IO0)):** Connected to GND.


A 0.1uF capacitor (C40) is connected between SYS_3.3V and GND.

项目名称	STM32H747XIH6 Core Board V1.1	
设计时间	2025-11-9	Page 3 of 6
公司名称	东莞市慧勤智远科技有限公司	


RGB

TP pin define

PIN NO.	CTP	RTP
PIN35	RST	CS
PIN36	SDA	MOSI
PIN37	NC	MISO
PIN38	SCL	SCK
PIN39	INT	PEN

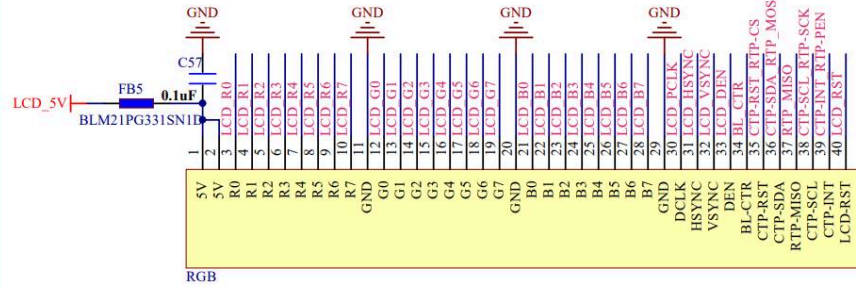


DSI

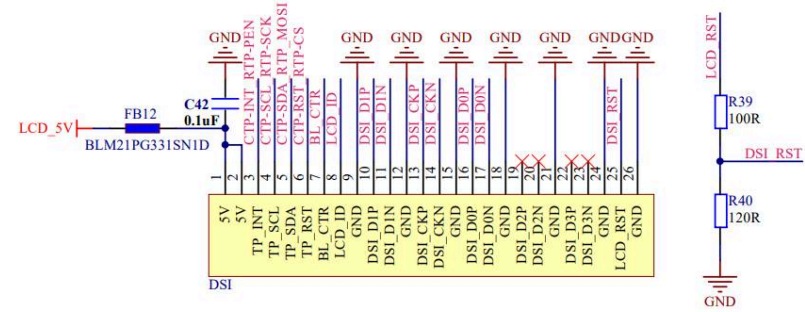


SPI

TP pin define

PIN NO.	CTP	RTP
PIN11	INT	PEN
PIN12	SCL	SCK
PIN13	SDA	MOSI
PIN14	RST	CS
PIN15	NC	MISO

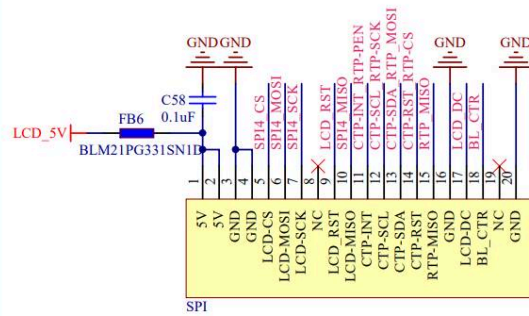

LCD POWER SWITCH

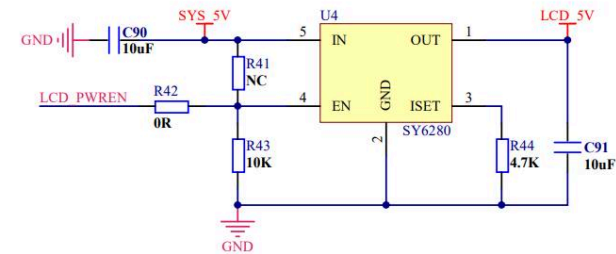

项目名称	STM32H747XIH6 Core Board V1.1	
设计时间	2025-11-9	Page 4 of 6
公司名称	东莞市慧勤智远科技有限公司	

A



A






C




D

1


POWER

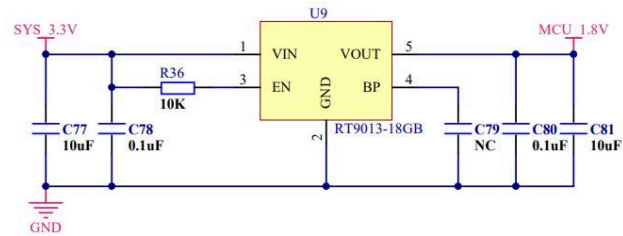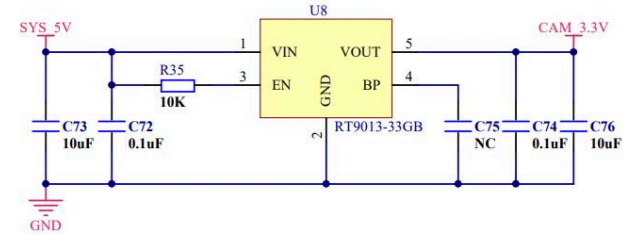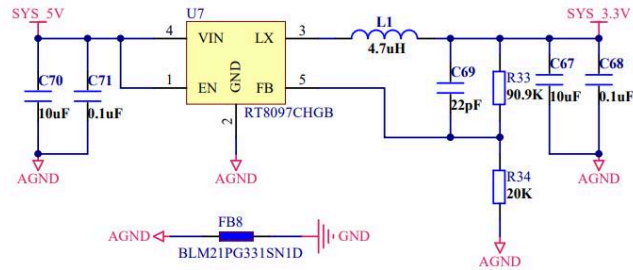

GPIO

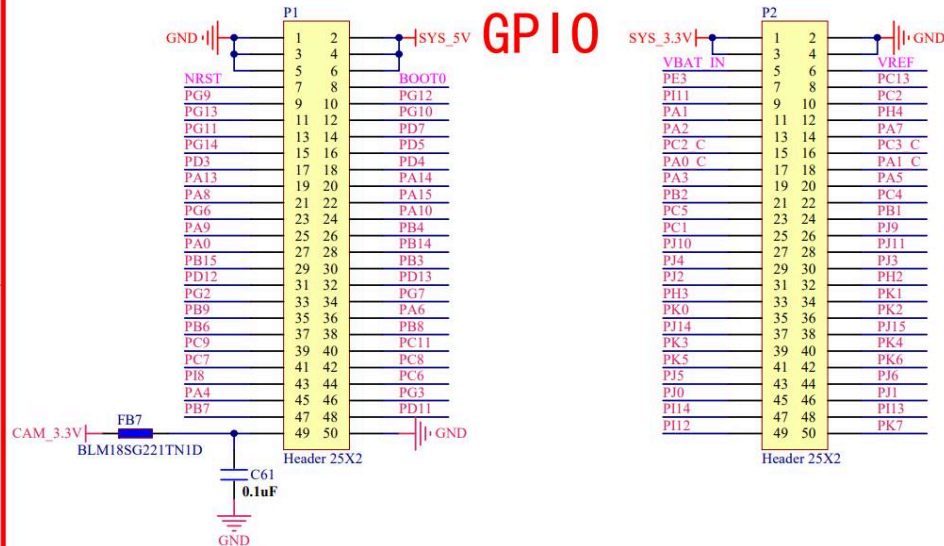

M3 HOLE



项目名称	STM32H747XIH6 Core Board V1.1	
设计时间	2025-11-9	Page 6 of 6
公司名称	东莞市慧勤智远科技有限公司	