KSC Series Sealed Tact Switch for SMT

Features/Benefits

- Positive tactile feel
- Range of 6 actuation forces
- J or G terminations
- Tape & reel
- IP 67
- RoHS compliant and compatible

Typical Applications

- Automotive
- Cellular phones
- Industrial electronics
- Network infrastructure and IT



Specification

FUNCTION: momentary action

CONTACT ARRANGEMENT: 1 make contact = SPST, N.O.

TERMINALS: J bend & Gullwing type for SMT

Mechanical

	Operating force	Operating	
	FA ¹⁾ Newtons	life	
Туре	(grams)	(operations)	Travel
KSC121J	1.6 (160)	200,000	0,3±0,15
KSC141J	3.0 (300)	200,000	0,3±0,15
KSC151J	5.5 (550)	100,000	0,35±0,15
KSC221J	2.0 (200)	500,000	0,35+0,30/-0,10
KSC241J	3.5 (350)	300,000	0,5±0,2
KSC321J	1.6 (160)	500,000	0,20+0,30/-0,0
KSC341J	3.0 (300)	300,000	0,20+0,30/-0,0
KSC351J	5.5 (550)	100,000	0,25+0,30-0,0
KSC401J50SH	1.1 (110)	5,000,000	0,35±0,15
KSC411J70SH	1.4 (140)	1,000,000	0,35+0,2/-0,2
KSC421J70SH	1.7 (170)	1,000,000	0,50+0,25/-0,25
KSC441J70SH	3.2 (320)	300,000	0,75+0,25/-0,25
KSC621J	1.6 (160)	500,000	0,50±0,20
KSC641J	3.0 (300)	300,000	0,50±0,20
KSC421V	1.7 (170)	1,000,000	0,50+0,25/-0,25
KSC621V	1.7 (170)	100,000	0,50±0,20

¹⁾ Tolerances of operating force FA is ± 25%.

A detect switch version is available KSC4D1J and KSC4D1G. Please see Detect chapter, page F-7.

Electrical	Silver	Gold	
MAXIMUM POWER:	1 VA	0.2 VA	
MAXIMUM VOLTAGE:	32 VDC	32 VDC	
MINIMUM VOLTAGE:	20 mV	20 mV	
MAXIMUM CURRENT:	50 mA	10 mA	
MINIMUM CURRENT: 1 mA 1 mA			
DIELECTRIC STRENGTH (50 H	z, 1 min.): 250 V		
CONTACT DECICTANCE, 100	l mO		

CONTACT RESISTANCE: $< 100 \text{ m}\Omega$ INSULATION RESISTANCE (100 V): $> 10^{9} \Omega$

BOUNCE TIME: < 1 ms

Environmental Silver Gold **OPERATING TEMPERATURE:** -40°C to 85°C -40°C to 125°C STORAGE TEMPERATURE: -55°C to 85°C -55°C to 125°C

Process

SOLDERING: Compatible with the lead free soldering profile.

Packaging


KSC1, KSC2 and KSC3 are delivered on continuous tape and reels of 2,000 pieces, KSC4 in reels of 1,000 pieces. KSC 6 in reels of 750 pieces. KSCV in boxes of 500 pieces. Dimensions of reels according to EIA RS481 or IEC 2863. External diameter 330 mm ± 2 mm.

NOTE: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.


However, please note that all the combinations of these options are not feasible. For any part number different from those listed above, please consult your local ITT representative.

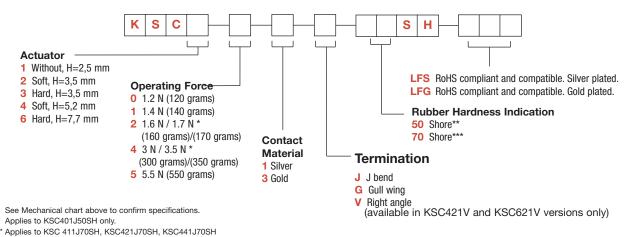




ACTUATOR


KSC1 WITHOUT, 2.5 mm HIGH

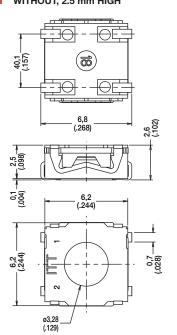

KSC2 SOFT, 3,5 mm HIGH




KSC3 HARD, 3,5 mm HIGH




KSC4 SOFT, 5,2 mm HIGH


NOTE: KSC4 standard silicone material is 70 shore, the only exception is KSC401J which is 50 shore.




KSC4 KSC421V ONLY

NOTE: KSC421V requires metalized holds for simultaneous reflow soldering of switch terminals and bracket terminals.






KSC6 HARD, 7,7 mm HIGH



KSC6 KSC621V ONLY

NOTE: KSC621V requires metalized holds for simultaneous reflow soldering of switch terminals and bracket terminals.

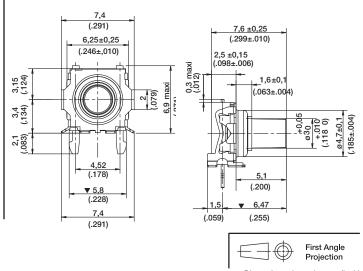




Dimensions shown in: mm (inch) Specifications and dimensions subject to change

OPERATING FORCE

OPTION CODE	OPERATING FORCE
0	1.2 N (120 grams)
1	1.4 N (140 grams)
2	1.6 N / 1.7 N (160/170 grams)
4	3 N / 3.5 N (300/350 grams)
5	5.5 N (550 grams)

CONTACT MATERIAL


OPTION CODE	MATERIAL
1	SILVER
3	GOLD

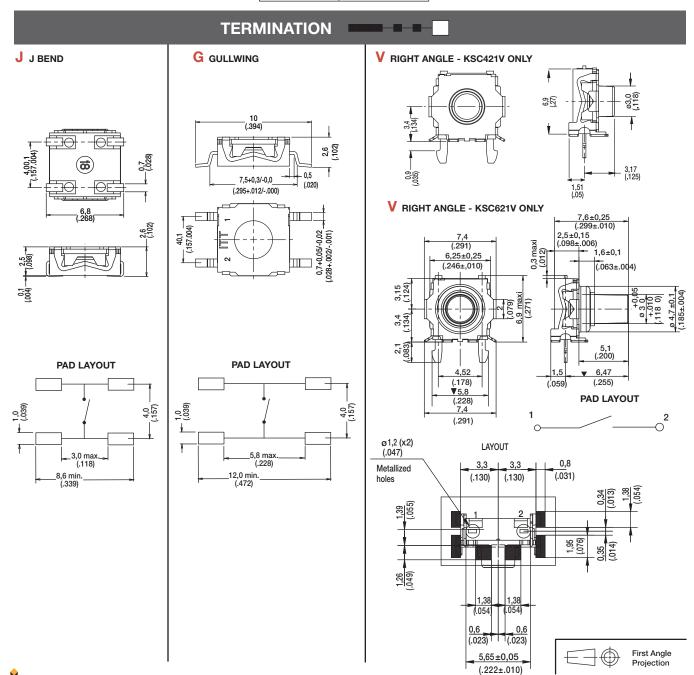





Dimensions shown in: mm (inch) Specifications and dimensions subject to change


TAPE & REEL

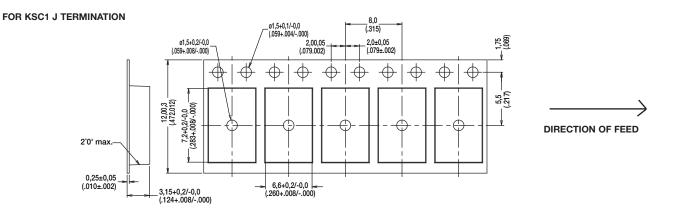

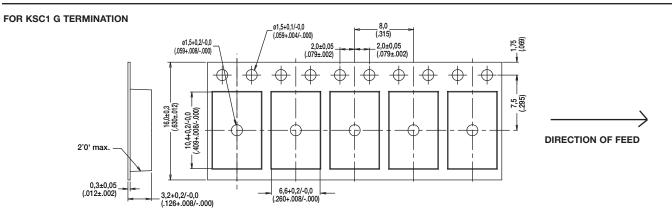

FOR KSC2 & KSC3 J TERMINATION

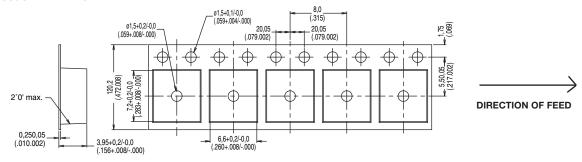


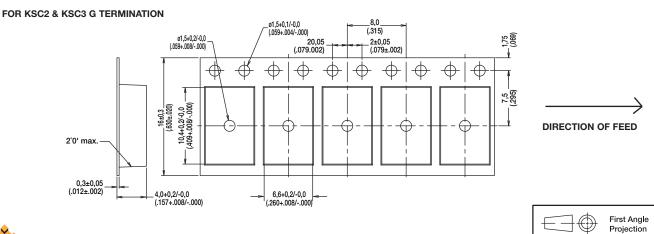




TAPE & REEL


FOR KSC4 FOR G TERMINATION

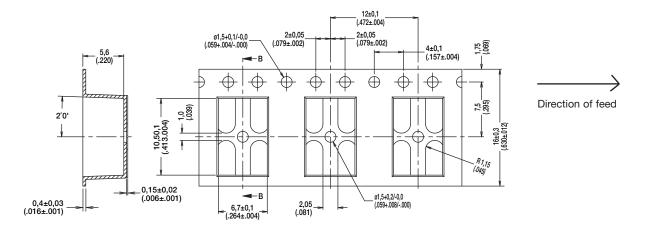

FOR KSC4 FOR J TERMINATION

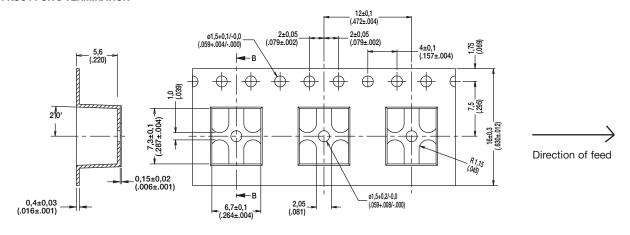

FOR KSC6 G & J TERMINATION

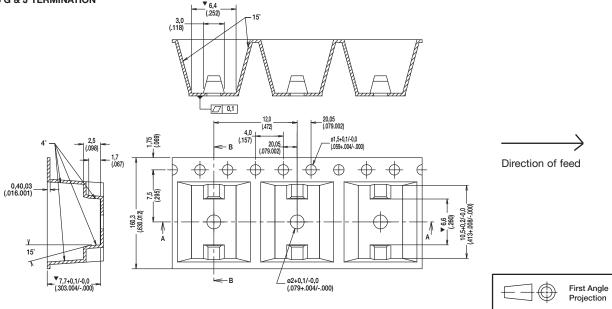



Dimensions shown in: mm (inch) Specifications and dimensions subject to change