

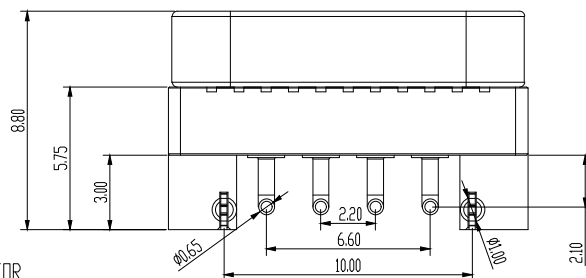
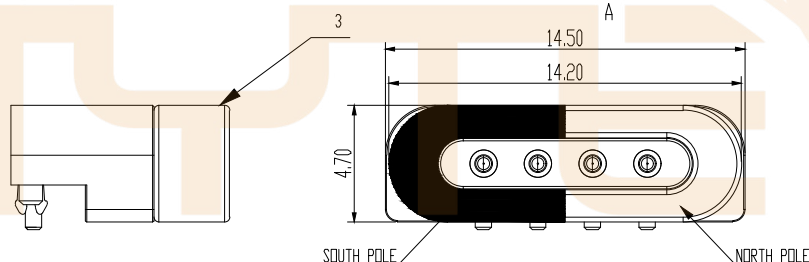


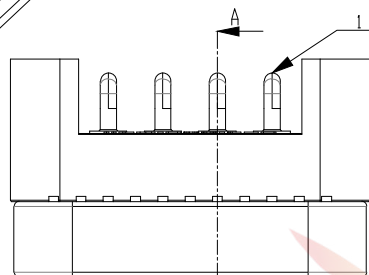

https://www.hyte.pro/product/m411p.html

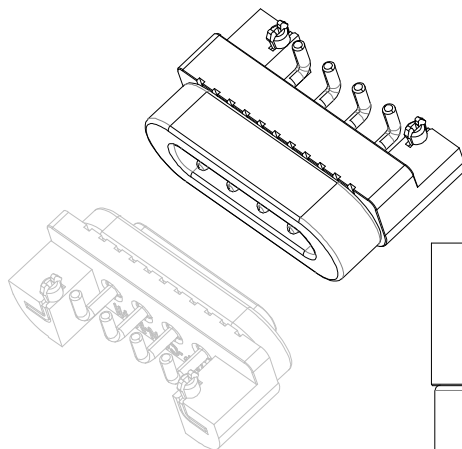




NOTE:
- THE HEIGHT OF POGO PINS MUST BE 100% CHECKED;
- AFTER ASSEMBLING, THE PROBE REBOUNDS WELL AFTER BEING PRESSED 5 TIMES, WITHOUT ANY HIGH OR LOW PHENOMENON.
- DO THE ADSORPTION TEST AFTER THE MAGNET IS GLUED FOR 24 HOURS.
- RATED CURRENT : 2A
- SPRING : STAINLESS STEEL SUS304/SWP
- NEEDLE : BRASS C2700 / C3604

BOM:

ITEM	NAME	MATERIAL	SURFACE	QT'Y
4	CLIP	STAINLESS STEEL	NICKEL PLATED	2 PCS
3	MAGNET	NDFEB	NICKEL PLATED	1 PCS
2	HOUSING	PBT	BLACK	1 PCS
1	POGO PIN	BRASS	GOLD PLATED 5U''	4 PCS


REV:	A/1	SCALE:	FIT
UNIT:	MM	SHEET:	1 OF 1
GENERAL TOLERANCES			
X.	±0.30	X*	±2°
.X	±0.20	.X*	±0.5°
.XX	±0.10	.XX*	±0.3°
THIRD ANGLE			

REV.	MODIFICATION	ECN NO.	NAME	DATE
A/0	NEW SPECIFICATIONS	2016090101	WINNIE	09/01
A/1	ADD PART NUMBER IDENTIFICATION AND DISPENSING GROOVE	2019052701	WINNIE	05/27

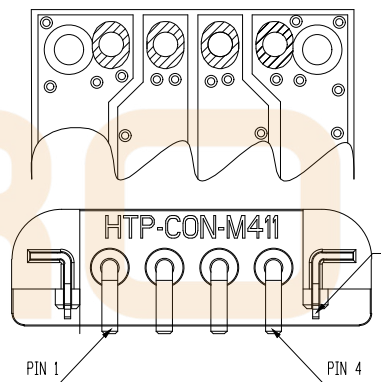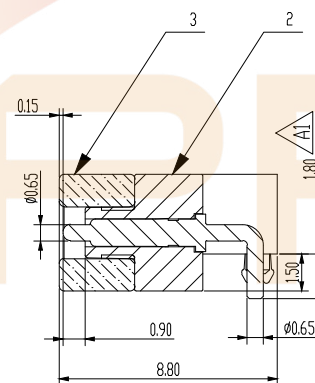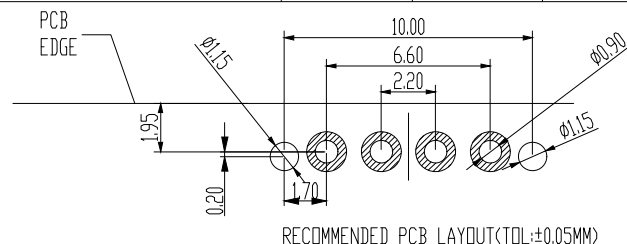







PIN ASSIGNMENT			
PIN	SIGNAL	DESCRIPTION	COLOR
1	VCC	+5V DC	RED
2	D-	DATA -	WHITE
3	D+	DATA +	GREEN
4	GND	GROUND	BLACK






REV.: A/1		SCALE: FIT		HYTEPRO TECHNOLOGIES LIMITED				HYTEPRO HTTPS://WWW.HYTE.PRO	
UNIT: MM		SHEET: 1 OF 1							
GENERAL TOLERANCES				产品名称 PRODUCT NAME		4 PINS MAGNETIC CONNECTOR MALE		核 准 APPROVED BY	JAMES
X.	±0.30	X°.	±2°	缩水率 SHRINKAGE		零件名称 PART NAME		审 核 CHECKED BY	BRUCE
.X	±0.20	.X°	±0.5°	材 质 MATERIAL		料 号 PART NO.	HTP-CON-M411P	制 表 DRAWN BY	WINNIE
.XX	±0.10	.XX°	±0.3°	表 面 SURFACE		模 号 MOLD NO.	HTP-CON-M411PR-M	日 期 DATE	2016/09/01
THIRD ANGLE									



https://www.hyte.pro/product/m411p.html

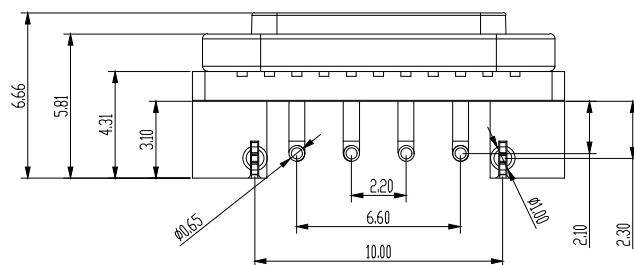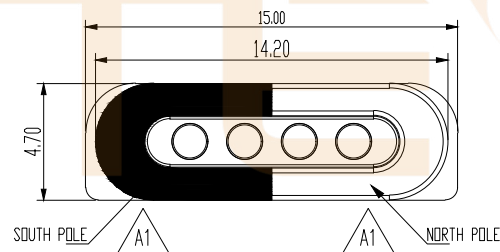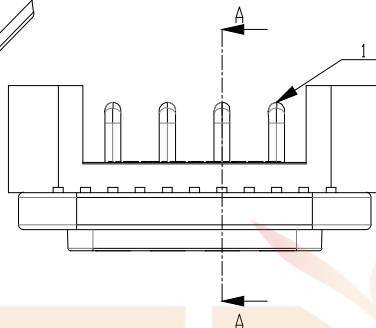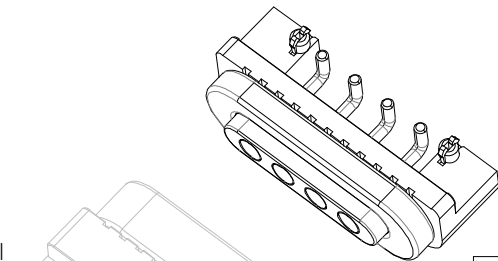

REV.	MODIFICATION	ECN NO.	NAME	DATE
A/0	NEW SPECIFICATIONS	2016090101	WINNIE	09/01
A/1	ADD PART NUMBER IDENTIFICATION AND DISPENSING GROOVE	2019052701	WINNIE	05/27

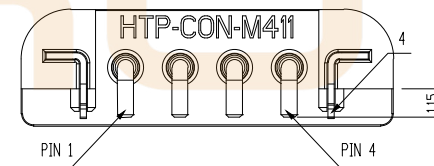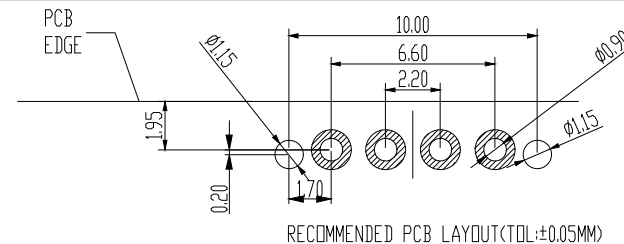

PIN ASSIGNMENT			
PIN	SIGNAL	DESCRIPTION	COLOR
4	VCC	+5V DC	RED
3	D-	DATA -	WHITE
2	D+	DATA +	GREEN
1	GND	GROUND	BLACK



NOTE:
- DO THE ADSORPTION TEST AFTER THE MAGNET IS GLUED FOR 24 HOURS.

BOM:

ITEM	NAME	MATERIAL	SURFACE	QT'Y
4	CLIP	STAINLESS STEEL	NICKEL PLATED	2 PCS
3	MAGNET	NDFEB	NICKEL PLATED	1 PCS
2	HOUSING	PBT	BLACK	1 PCS
1	SOLDER PIN	BRASS	GOLD PLATED 5U"	4 PCS

REV: A/1	SCALE: FIT
UNIT: MM	SHEET: 1 OF 1
GENERAL TOLERANCES	
X. ±0.30	X*. ±2°
.X ±0.20	.X* ±0.5°
.XX ±0.10	.XX* ±0.3°
THIRD ANGLE	

HYTEPRO TECHNOLOGIES LIMITED				HYTEPRO HTTPS://WWW.HYTE.PRO	
产品名称 PRODUCT NAME		POSITIVE 4 PINS MAGNETIC CONNECTOR FEMALE		核准 APPROVED BY	JAMES
缩水率 SHRINKAGE		零件名称 PART NAME		审核 CHECKED BY	BRUCE
材质 MATERIAL		料号 PART NO.		制表 DRAWN BY	WINNIE
表面 SURFACE		模号 MOLD NO.		日期 DATE	2016/09/01