

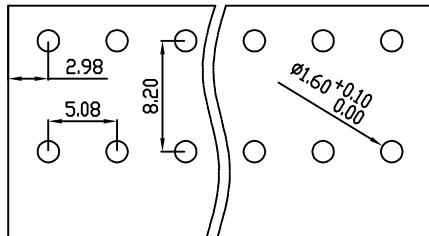
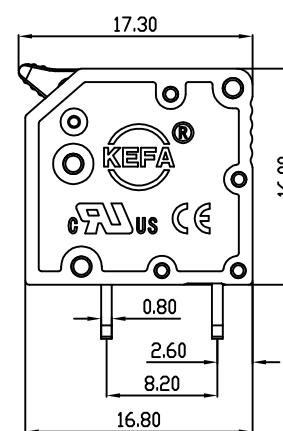
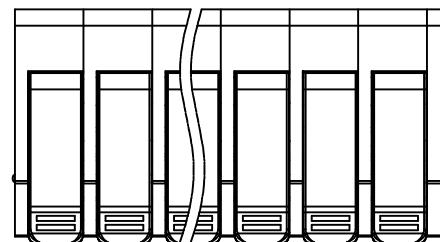


linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	— □ 上									
	over 6	over 10	over 30	over 60	over 100	over 160	to 10	over 10	over 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

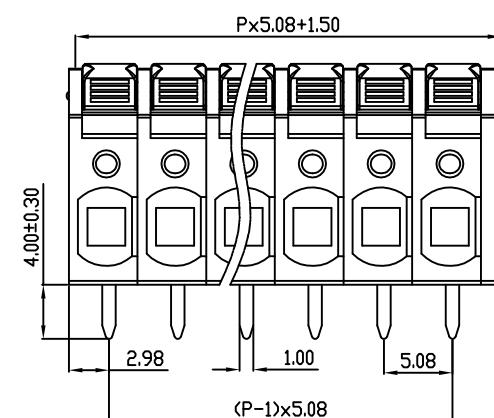

PCB Layout



REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	23.12.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	20	-	10	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	24-12			
耐电压 Withstanding Voltage	AC1600V/1Min			
IEC 技术参数 IEC Technical Data				
过电压类别 Overvoltage Category	III	III	II	
污染等级 Contamination Class	3	2	2	
额定电压 Rated Voltage [V]	320	400	630	
额定电流 Rated Current [A]	32	32	32	
额定冲击电压 Impulse withstand voltagea [KV]	4	4	4	
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm ²]	0.2-2.5 (SOL4.0)			
材料 Material				
绝缘材料 Insulation Material	PA66			
阻燃等级 Flammability	UL94V-0			
导体材料 Contactor Material	铜合金 Copper alloy			
导体表面镀层 Contactive Coating	镀锡 Tin Plated			
一般参数 Other Data				
间距 Pitch [mm]	5.08			
极数 Poles [P]	01-XX			
剥线长度 Stripping Length [mm]	12			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			
工作温度 Operating temperature [°C]	-40→+105			
引针尺寸 Pin Dimensions [mm]	4.0			
PCB板孔径 PCB Hole Diameter [mm]	1.60			

DES.	SJD	DATE	23.12.16	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	23.12.16									
APP.	CLF	DATE	23.12.16									

慈溪市科发电子有限公司
CIXI KEFA ELECTRONIC CO., LTD名称 / TITLE
KF208R-5.08