CS 4390
Computer Networks

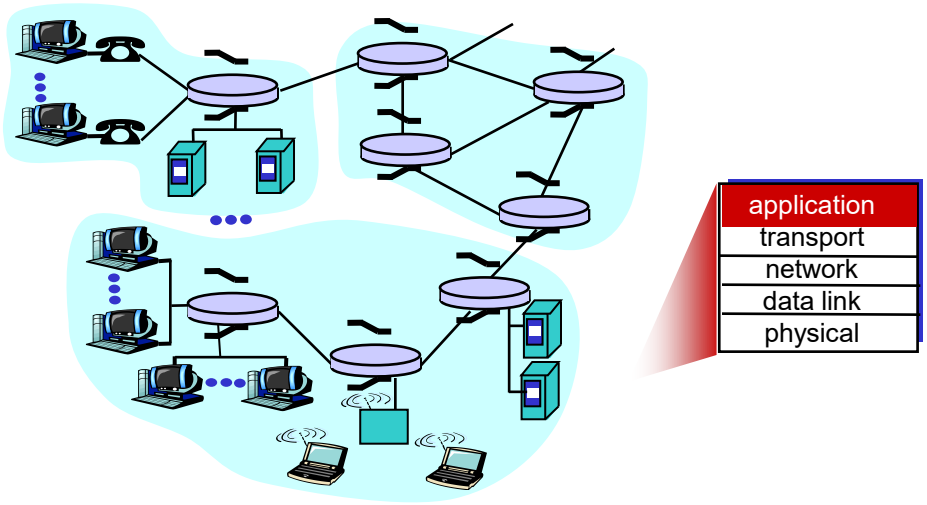

Network Layer
The Internet Protocol – Part I

The Internet Protocol Suite

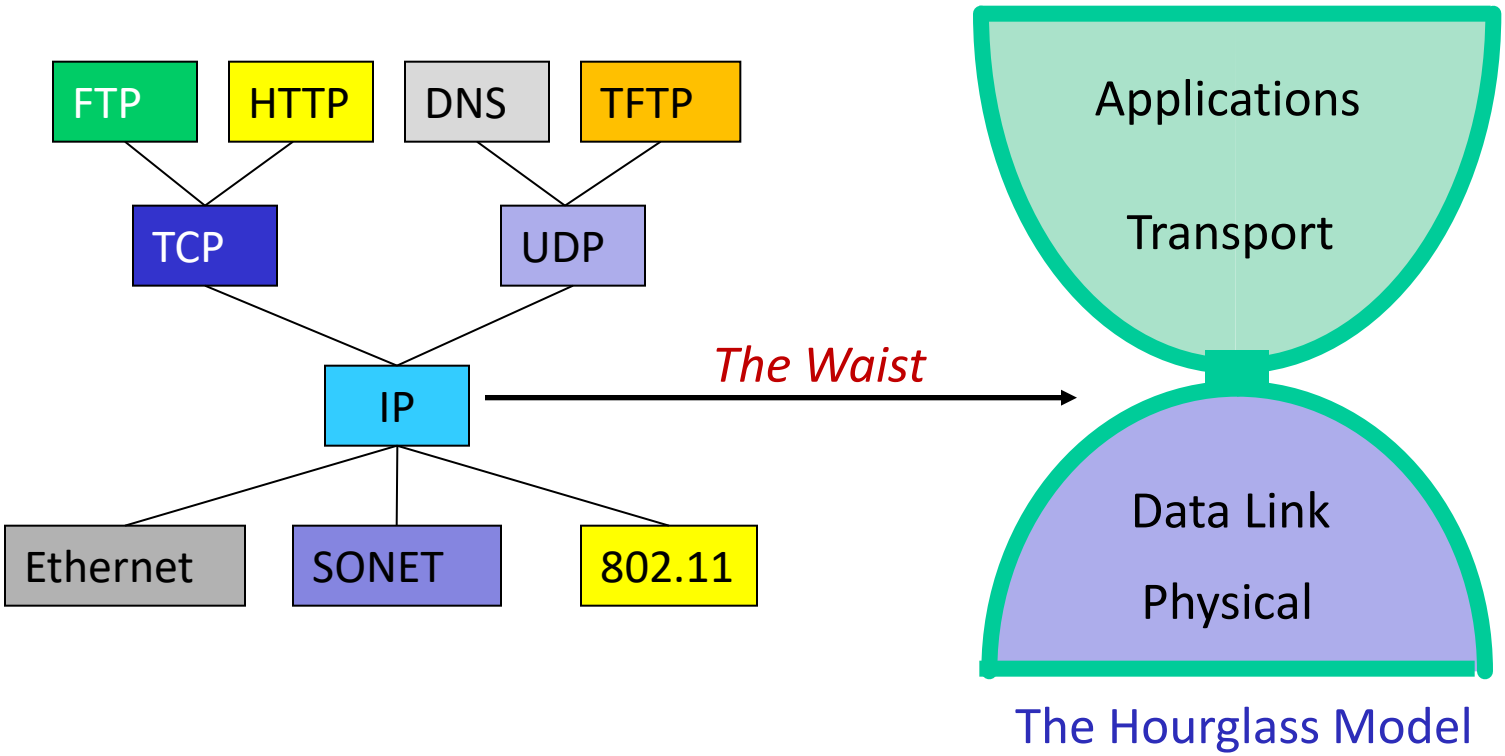

The Hourglass Model

IP is the glue to interconnects heterogeneous networks and to provide inter-host packet transport!

Adapted from a slide by Prof. Mike Freeman

Network Layer for the Internet

host, router network layer functions:

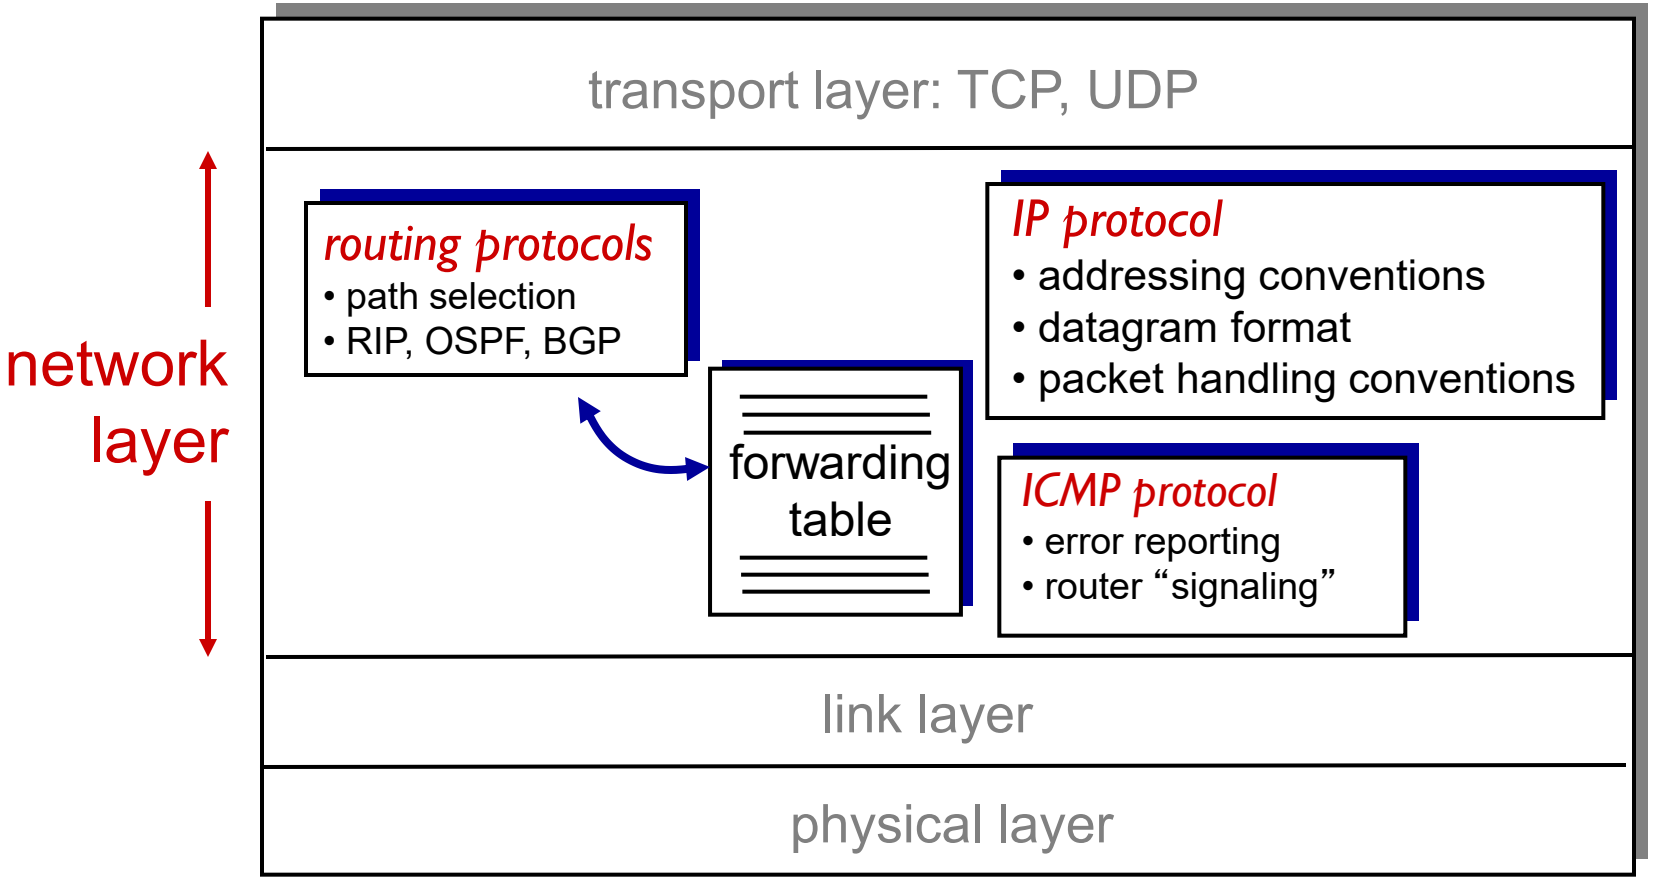

IP Datagram Format

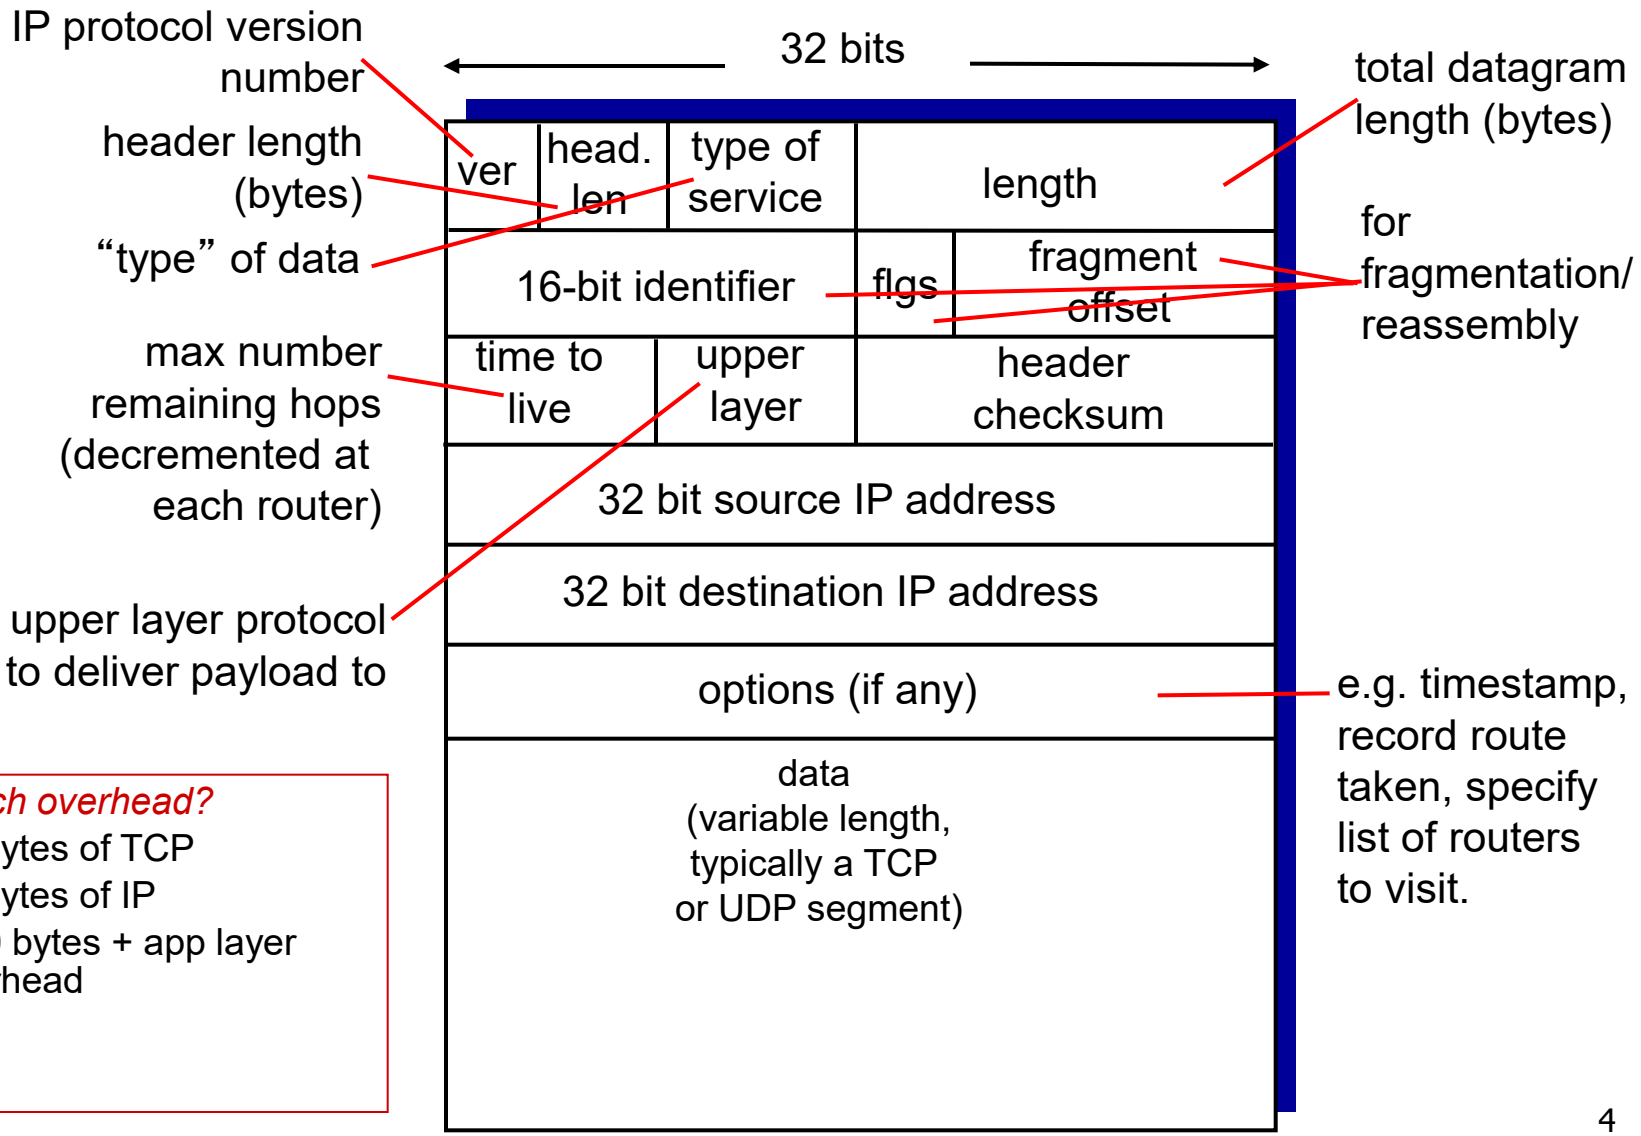

how much overhead?

- 20 bytes of TCP
- 20 bytes of IP
- = 40 bytes + app layer overhead

IP Fragmentation, Reassembly

- network links have MTU (max.transfer size) - largest possible link-level frame
  - different link types, different MTUs
- large IP datagram divided ("fragmented") within net
  - one datagram becomes several datagrams
  - "reassembled" only at final destination
  - IP header bits used to identify, order related fragments

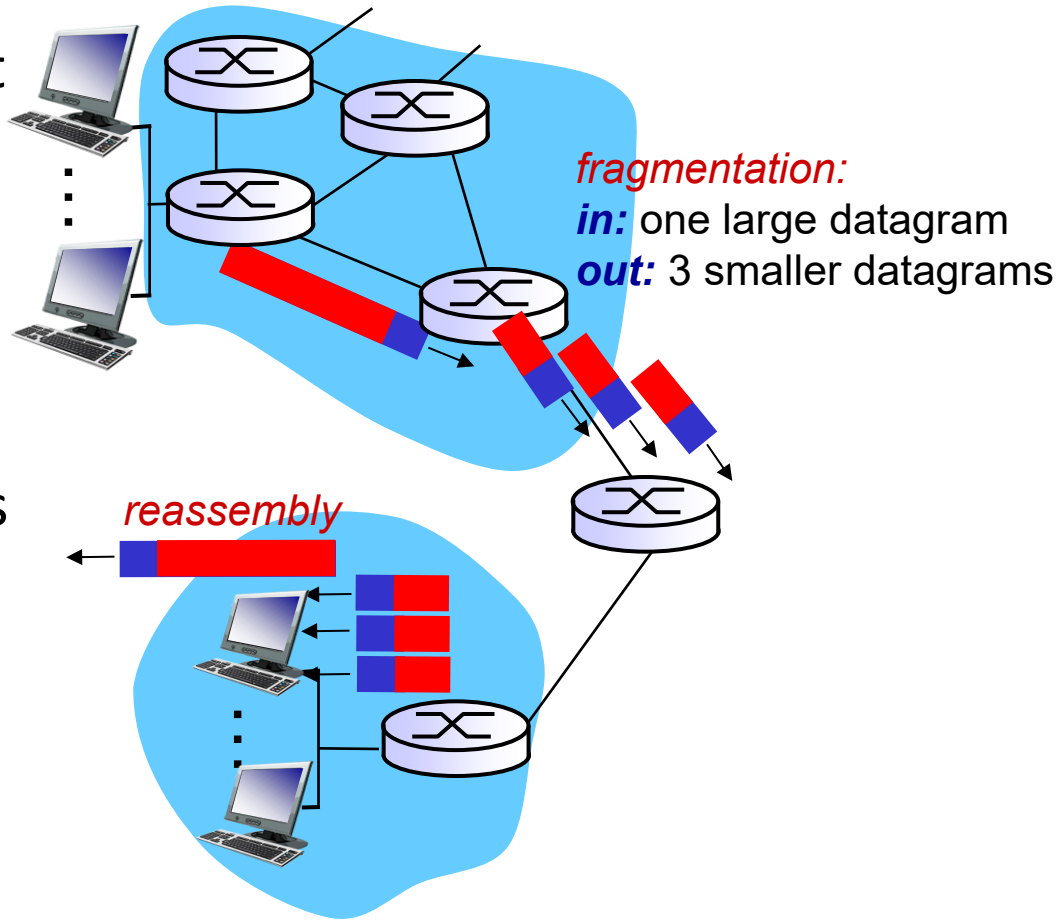

IP Fragmentation, Reassembly

example:

- 4000 byte datagram
- MTU = 1500 bytes

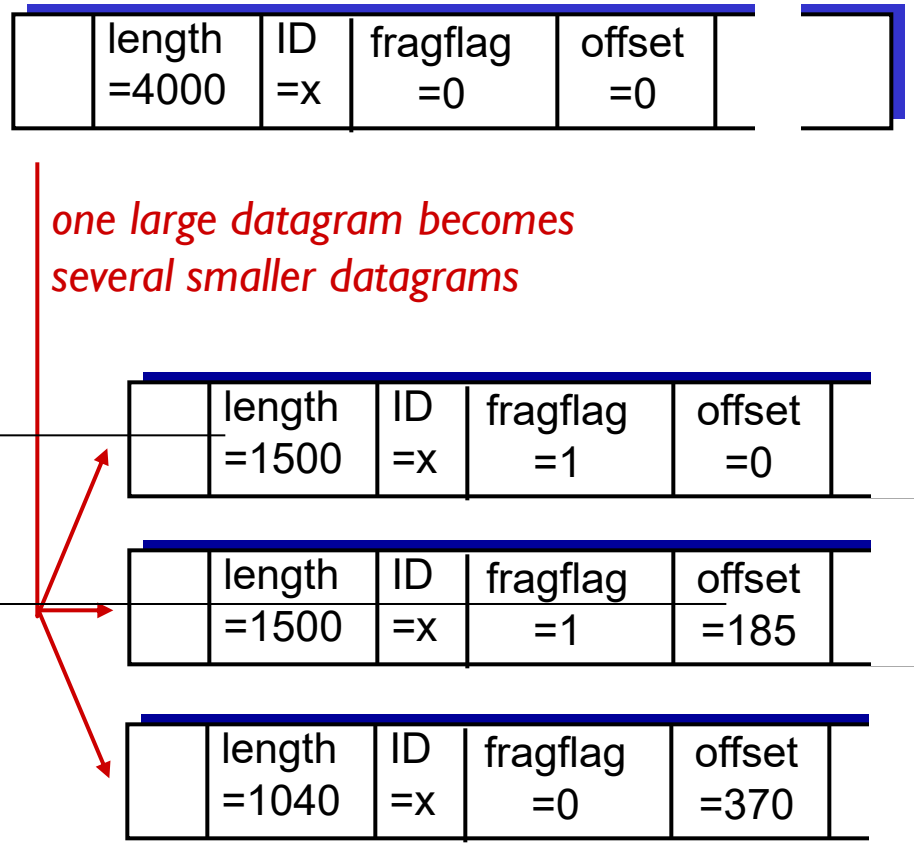

IP Addressing: Introduction

- *IP address:* 32-bit identifier for host, router *interface*
- *interface:* connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)
- *IP addresses associated with each interface*

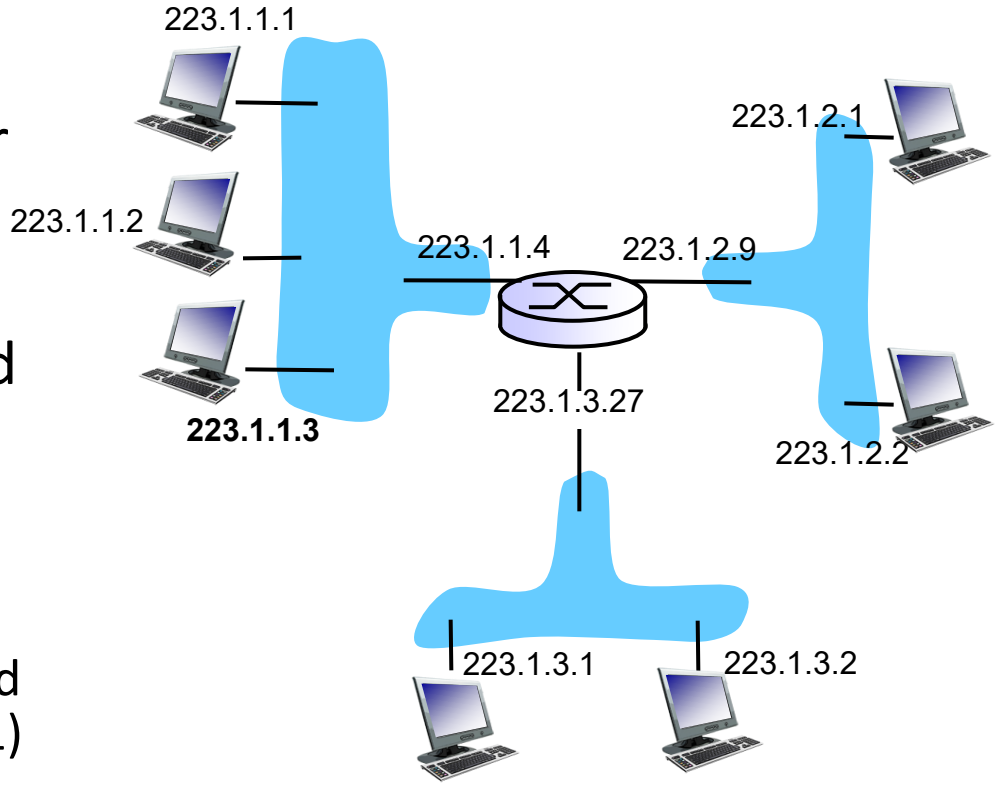

223.1.1.3 = 11011111 00000001 00000001 00000011

223 1 1 3

IP Addressing: Introduction

Q: how are interfaces actually connected?

A: we'll learn about that later when we study link layer!

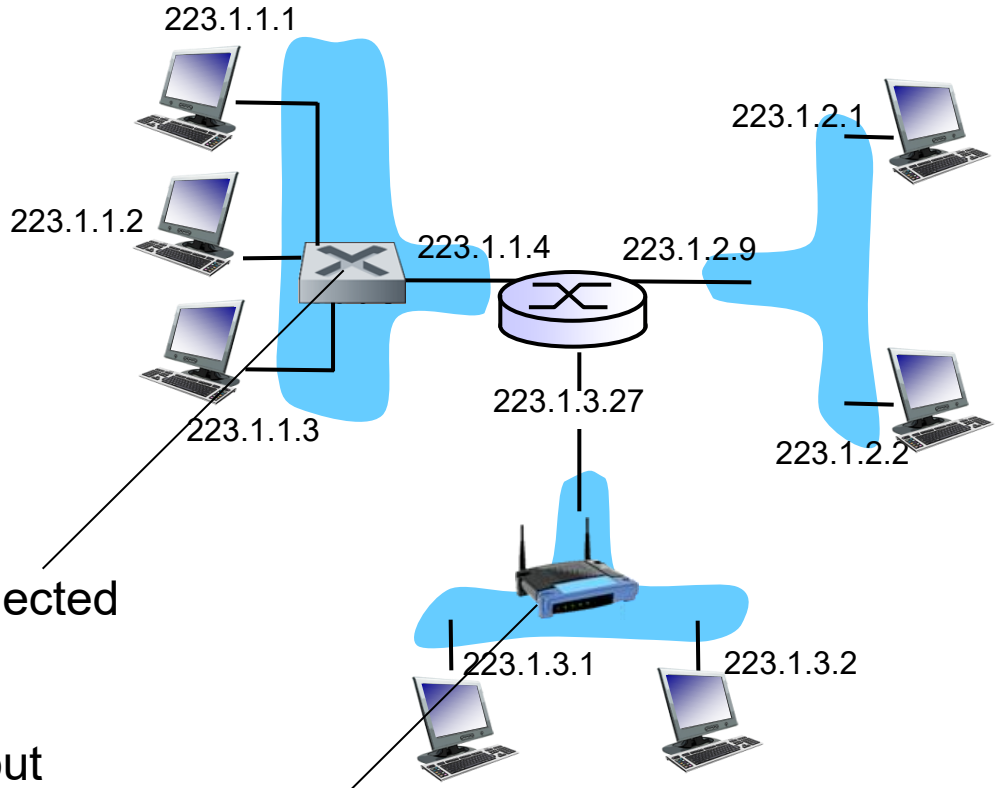

A: wired Ethernet interfaces connected by Ethernet switches

For now: don't need to worry about how one interface is connected to another (with no intervening router)

A: wireless WiFi interfaces connected by WiFi base station

IP Addresses

- Fixed length: 32 bits (total ~4 billion addresses)
- Hierarchical
  - Two parts: *network ID* and *host ID*
- Divided into classes (indicated by the first few bits)
  - Class A: assigned to Internet "pioneers" and large networks
  - Class B: for middle-size networks
  - Class C: for small enterprise networks

First Bits	Class	Number of networks and hosts
0	A	128 networks, 16M hosts each
10	B	16K networks, 65K hosts each
110	C	2M networks, 256 hosts each

IP Address Classes

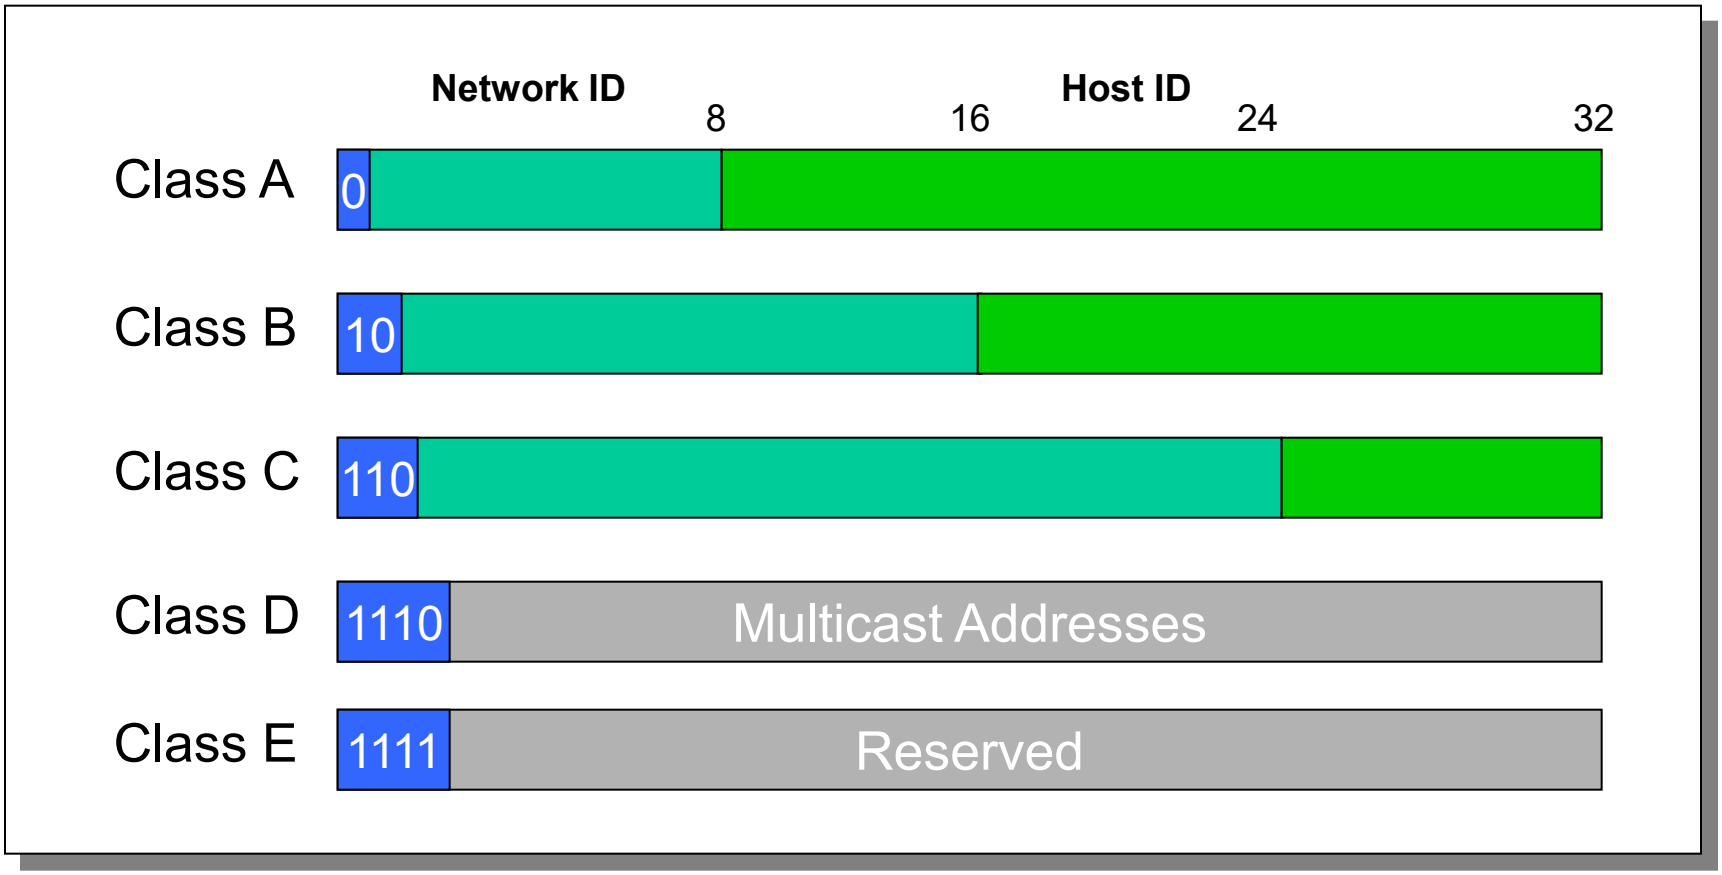

Potential problems?

IP Addressing: CIDR

CIDR: *C*lassless *I*nter*D*omain *R*outing

- ***subnet*** portion of address of arbitrary length
- address format: a.b.c.d/x, where x is # bits in ***subnet*** portion of address

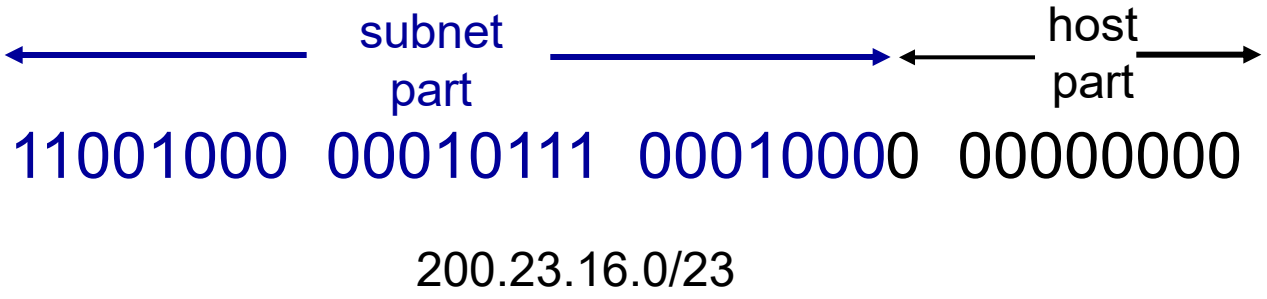

Q: *How to obtain the subnet part of an IP address?*

A: Using a subnet mask

Subnets

- *what's a subnet ?*
  - –device interfaces with same subnet part of IP address
  - –can physically reach each other *without intervening router*
- IP address:
  - –*subnet part* - high order bits
  - –*host part* - low order bits

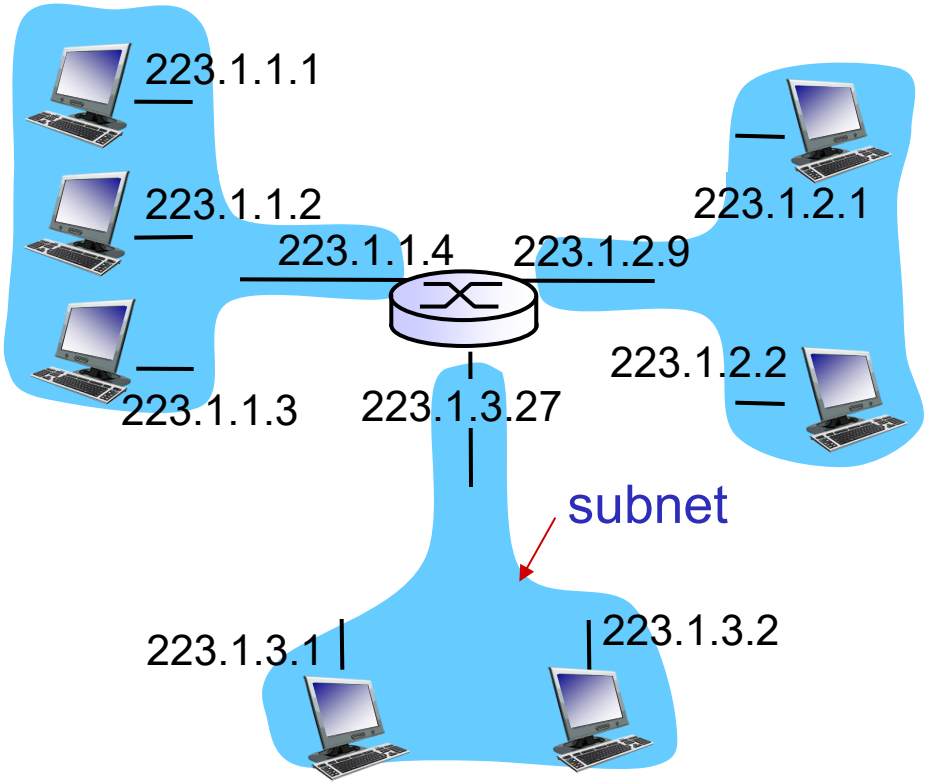

network consisting of 3 subnets

Subnets

recipe

- to determine the subnets, detach each interface from its host or router, creating islands of isolated networks
- each isolated network is called a *subnet*

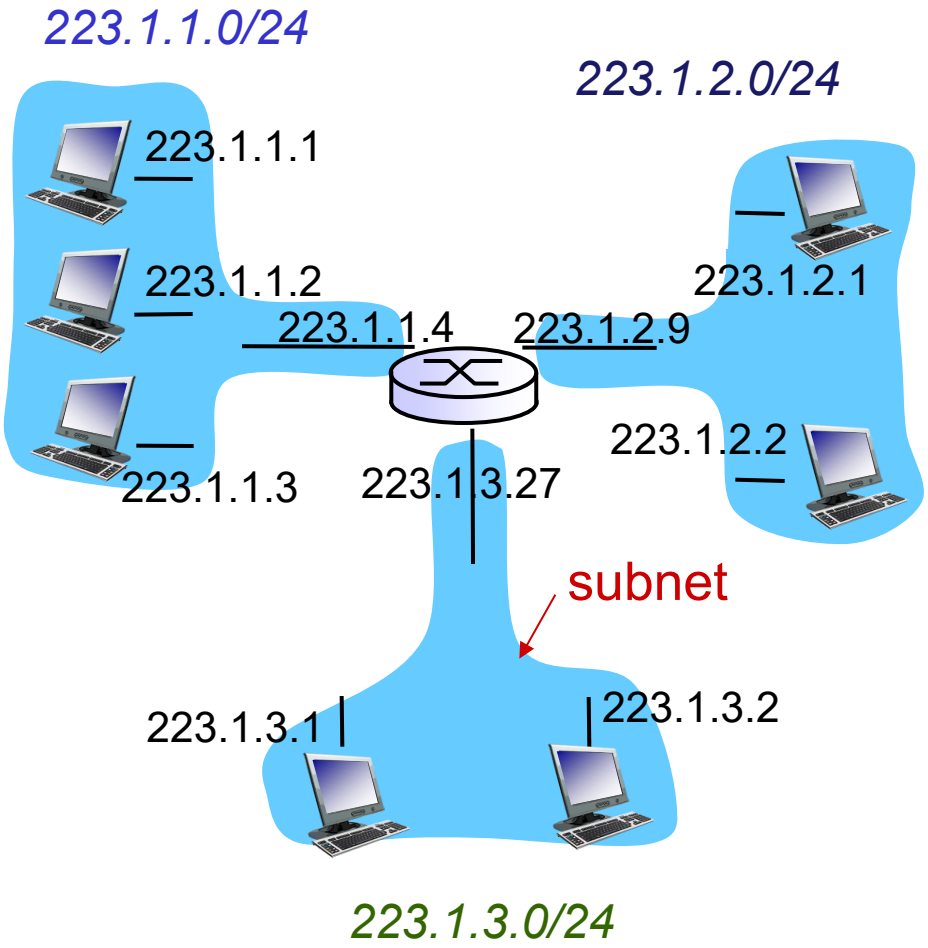

subnet mask: /24

Subnets

how many?

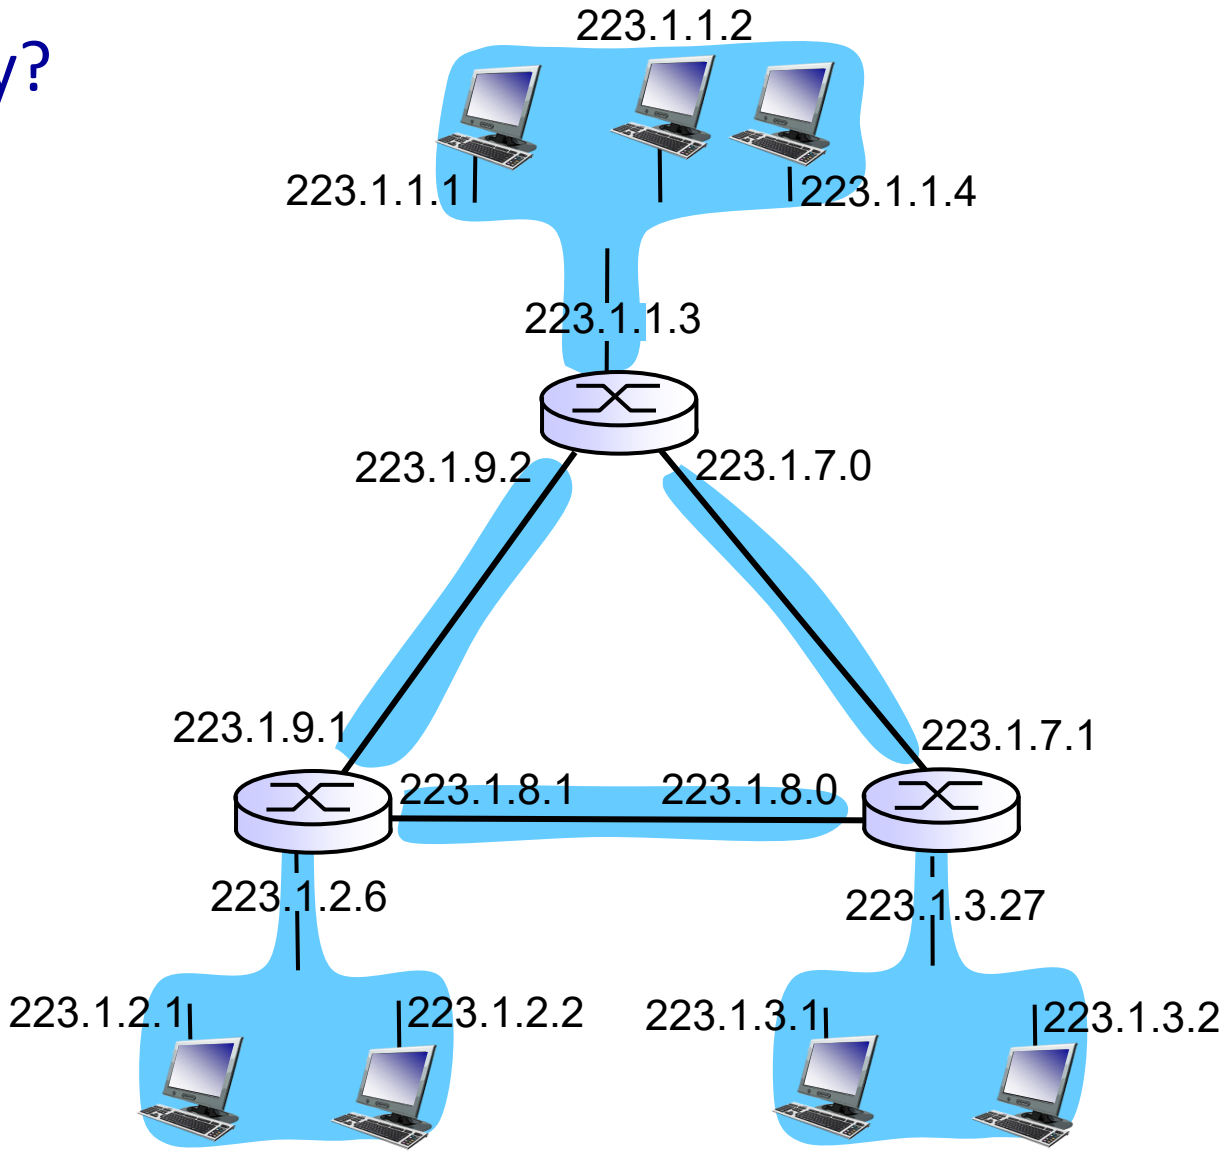

IP Addresses: How to Get One?

Q: How does a *host* get IP address?

- hard-coded by system admin in a file
  - Windows: control-panel->network->configuration->tcp/ip->properties
  - UNIX: /etc/rc.config
- DHCP: Dynamic Host Configuration Protocol: dynamically get address from as server
  - "plug-and-play"

DHCP: Dynamic Host Configuration Protocol

goal: allow host to *dynamically* obtain its IP address from network server when it joins network

- can renew its lease on address in use
- allows reuse of addresses (only hold address while connected/"on")
- support for mobile users who want to join network (more shortly)

DHCP overview:

- host broadcasts "DHCP discover" msg [optional]
- DHCP server responds with "DHCP offer" msg [optional]
- host requests IP address: "DHCP request" msg
- DHCP server sends address: "DHCP ack" msg

DHCP client-server Scenario

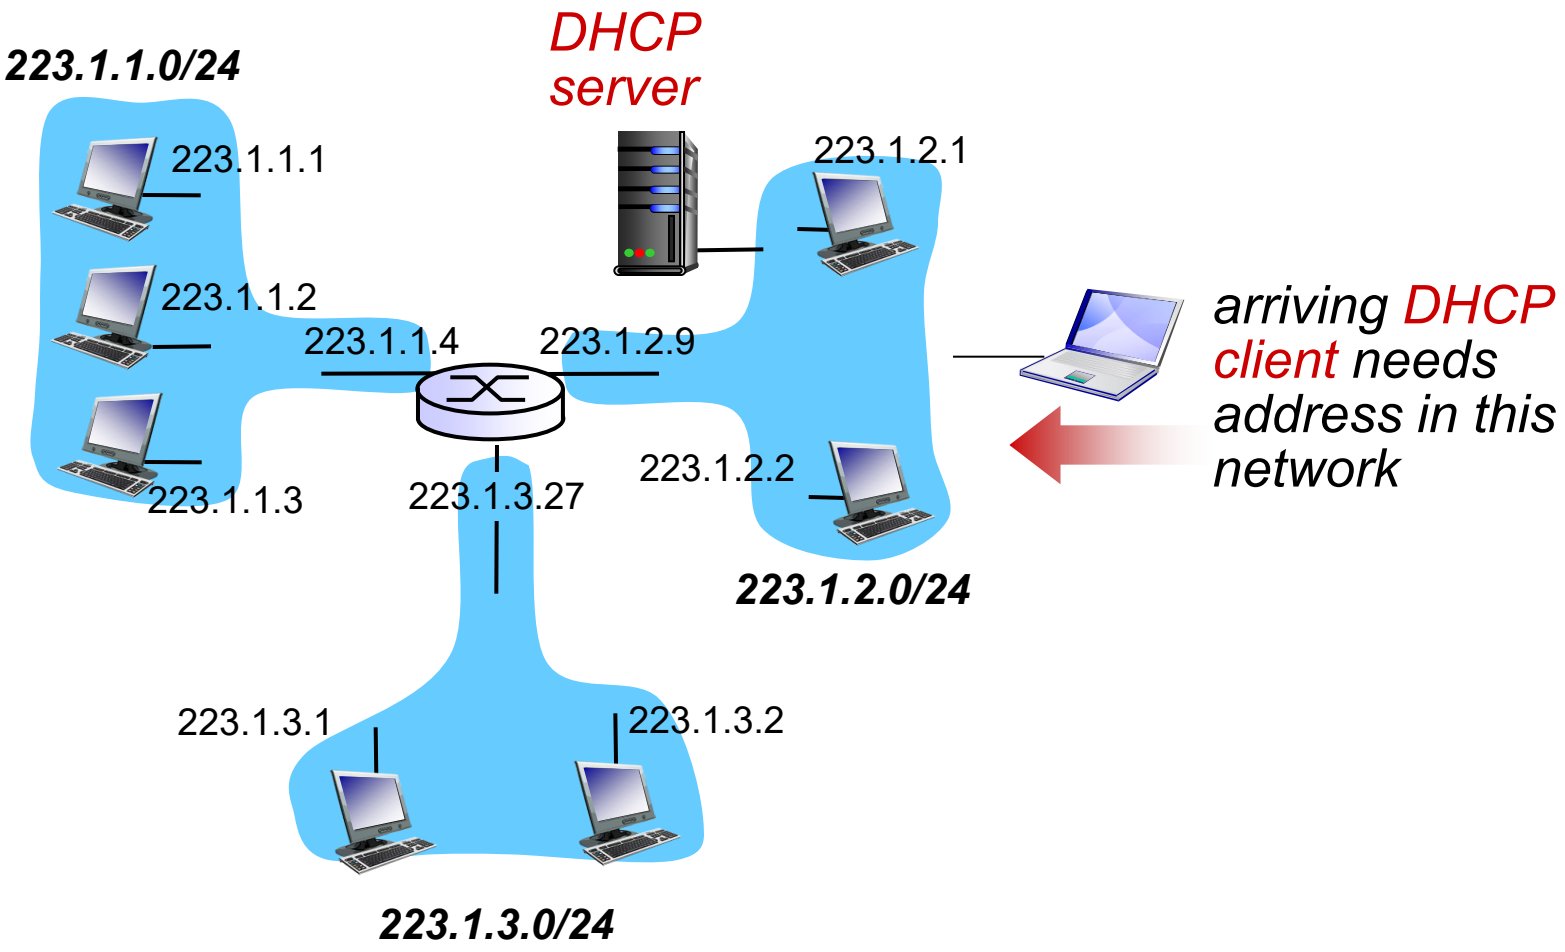

DHCP client-server Scenario

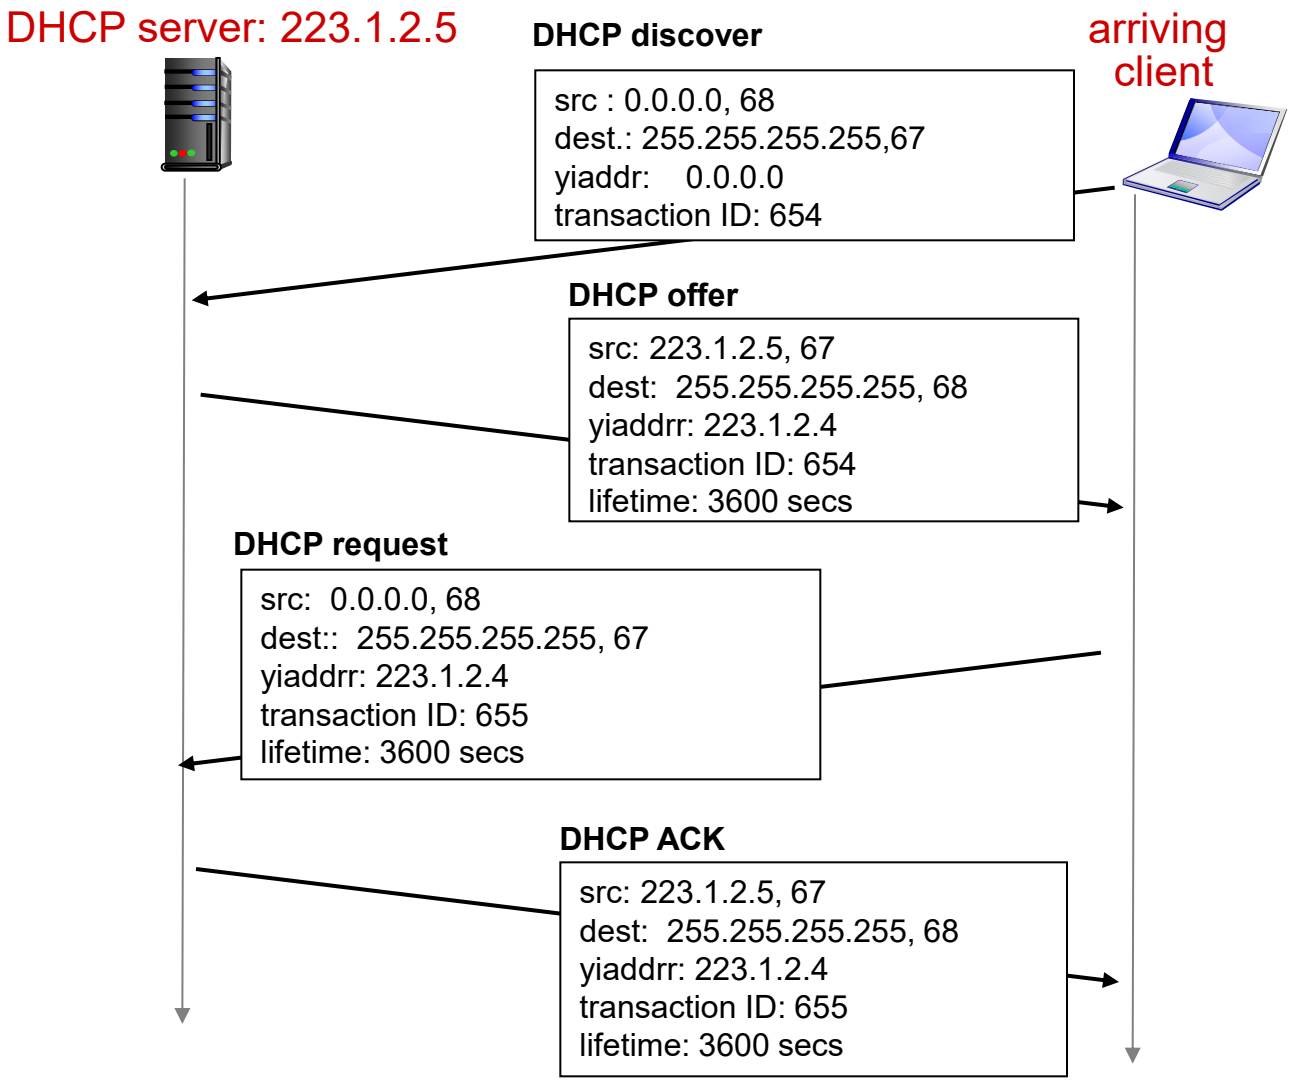

DHCP: more than IP Addresses

DHCP can return more than just allocated IP address on subnet:

- address of first-hop router for client
- name and IP address of DNS server
- *network mask* (indicating network versus host portion of address)

DHCP Example

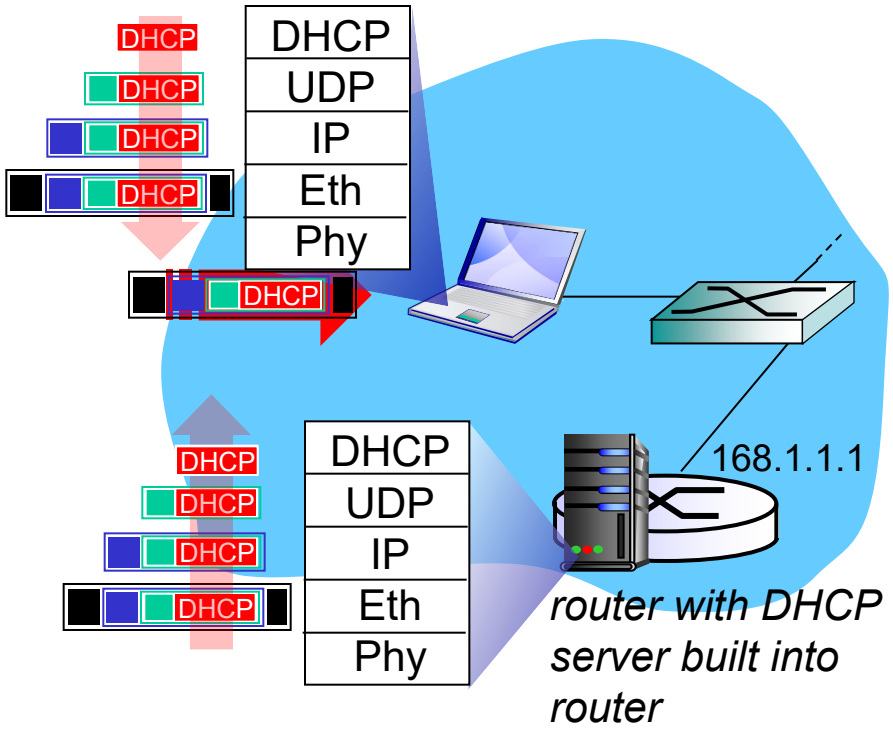

- connecting laptop needs its IP address, addr of first-hop router, addr of DNS server: use DHCP
- DHCP request encapsulated in UDP, encapsulated in IP, encapsulated in 802.1 Ethernet
- Ethernet frame broadcast (dest: FFFFFFFFFFFF) on LAN, received at router running DHCP server
- Ethernet demuxed to IP demuxed, UDP demuxed to DHCP

DHCP Example

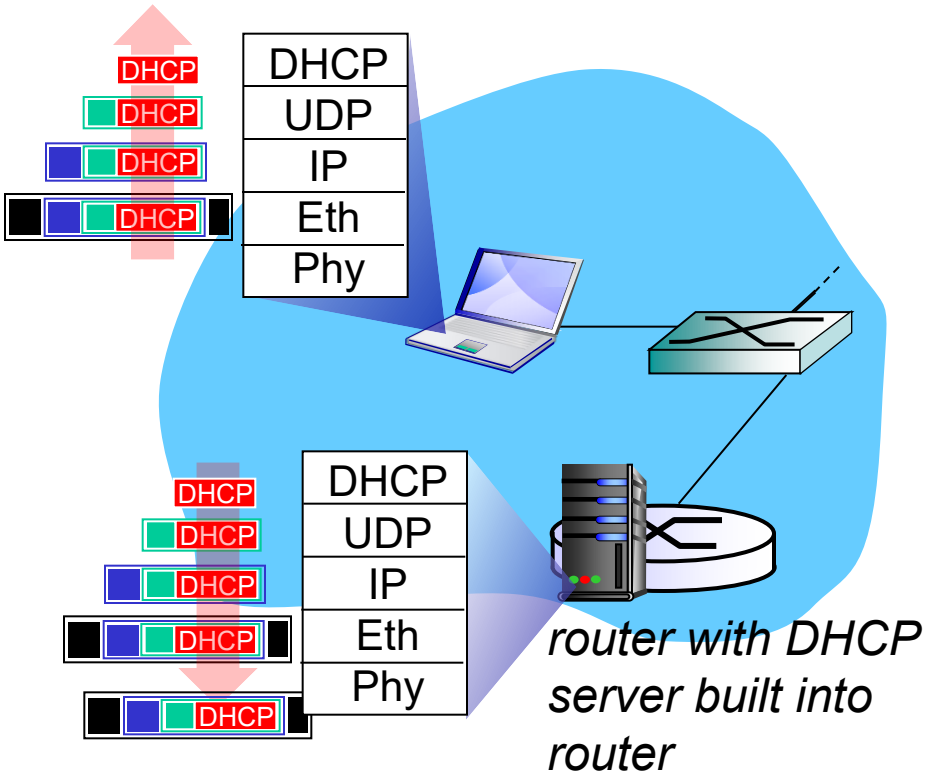

- DCP server formulates DHCP ACK containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
  - encapsulation of DHCP server, frame forwarded to client, demuxing up to DHCP at client
  - client now knows its IP address, name and IP address of DSN server, IP address of its first-hop router

DHCP: Wireshark output (home LAN)

request

Message type: **Boot Request (1)**
Hardware type: Ethernet
Hardware address length: 6
Hops: 0
Transaction ID: 0x6b3a11b7
Seconds elapsed: 0
Bootp flags: 0x0000 (Unicast)
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 0.0.0.0 (0.0.0.0)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 0.0.0.0 (0.0.0.0)
Client MAC address: Wistron_23:68:8a (00:16:d3:23:68:8a)
Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) **DHCP Message Type = DHCP Request**
Option: (61) Client identifier
    Length: 7; Value: 010016D323688A;
    Hardware type: Ethernet
    Client MAC address: Wistron_23:68:8a (00:16:d3:23:68:8a)
Option: (t=50,l=4) Requested IP Address = 192.168.1.101
Option: (t=12,l=5) Host Name = "nomad"
Option: (55) Parameter Request List
    Length: 11; Value: 010F03062C2E2F1F21F92B
    1 = Subnet Mask; 15 = Domain Name
    3 = Router; 6 = Domain Name Server
    44 = NetBIOS over TCP/IP Name Server
    ……

reply

Message type: **Boot Reply (2)**
Hardware type: Ethernet
Hardware address length: 6
Hops: 0
Transaction ID: 0x6b3a11b7
Seconds elapsed: 0
Bootp flags: 0x0000 (Unicast)
Client IP address: 192.168.1.101 (192.168.1.101)
Your (client) IP address: 0.0.0.0 (0.0.0.0)
Next server IP address: 192.168.1.1 (192.168.1.1)
Relay agent IP address: 0.0.0.0 (0.0.0.0)
Client MAC address: Wistron_23:68:8a (00:16:d3:23:68:8a)
Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) DHCP Message Type = DHCP ACK
Option: (t=54,l=4) Server Identifier = 192.168.1.1
Option: (t=1,l=4) Subnet Mask = 255.255.255.0
Option: (t=3,l=4) Router = 192.168.1.1
Option: (6) Domain Name Server
    Length: 12; Value: 445747E2445749F244574092;
    IP Address: 68.87.71.226;
    IP Address: 68.87.73.242;
    IP Address: 68.87.64.146
Option: (t=15,l=20) Domain Name = "hsd1.ma.comcast.net."

IP Addresses: How to Get One?

Q: how does *network* get subnet part of IP addr?

A: gets allocated portion of its provider ISP's address space

ISP's block	11001000 00010111 00010000	00000000	200.23.16.0/20
Organization 0	11001000 00010111 00010000	00000000	200.23.16.0/23
Organization 1	11001000 00010111 00010010	00000000	200.23.18.0/23
Organization 2	11001000 00010111 00010100	00000000	200.23.20.0/23
...	.....	....	....
Organization 7	11001000 00010111 00011110	00000000	200.23.30.0/23

IP Addressing: the Last Word...

Q: how does an ISP get block of addresses?

A: ICANN: Internet Corporation for Assigned Names and Numbers http://www.icann.org/

- allocates addresses
- manages DNS
- assigns domain names, resolves disputes