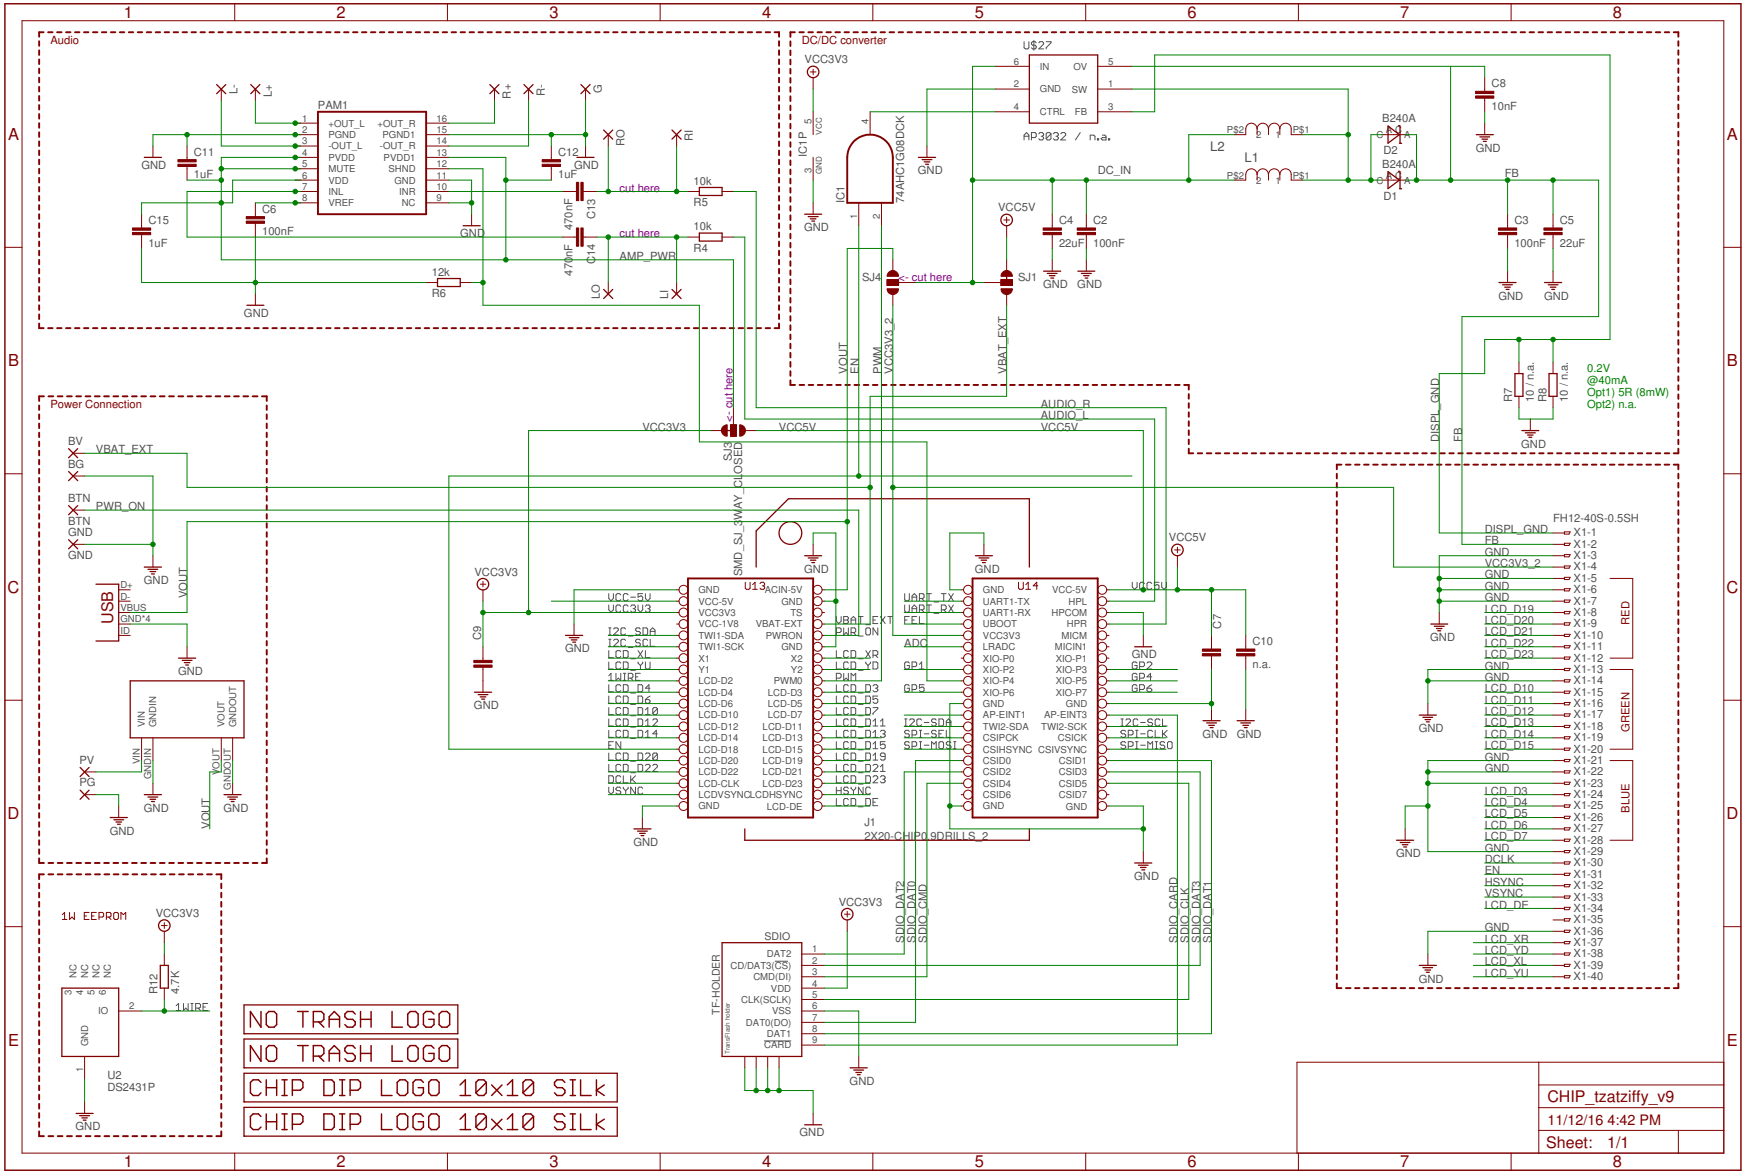

CHANGELOG:

v7 -> v8
- added second lowside resistor to achive 5R easier/cheaper (10||10)
- changed micro USB footprint to smd
- changed drills from 0.8mm to 0.9mm and 0.1mm offset per bank
- increased DS2431 footprint

0.7mm is actually 0.7mm and too small for the pins

0.8mm is actually 0.85mm and too lose