

Q-band ART: Adaptive Band Suppression for Anti-Rollover Tracking of Semi-Trailer Tank Trucks

1st Xiaojing Qi

School of Vehicle and Mobility
Tsinghua University
Beijing, China
komasaqi@foxmail.com

2nd Linhao Gong

School of Automotive and Traffic Engineering
Jiangsu University of Technology
Changzhou, China
linhaogong6@gmail.com

3rd Kunpeng Wang

School of Automotive Studies
Chang'an University
Xian, China
15389694186@163.com

4th Wei Zhong

State Key Laboratory of Intelligent Green
Vehicle and Mobility, Tsinghua University
Beijing, China
zhongwei@mail.tsinghua.edu.cn

5th Bolin Gao

School of Vehicle and Mobility
Tsinghua University
Beijing, China
gaobolin@tsinghua.edu.cn

6th Yugong Luo

School of Vehicle and Mobility
Tsinghua University
Beijing, China
lyg@tsinghua.edu.cn

Abstract—Semi-trailer tankers are prone to rollover because lateral acceleration excites both suspension roll and liquid sloshing. Existing anti-rollover tracking methods usually introduce liquid states, roll states, or lateral load transfer ratio predictions into model predictive control, which increases dependence on liquid calibration, trailer-side sensing, and online model dimension. This paper proposes Q-band ART (Anti-Rollover Tracking), an adaptive band-suppression framework that penalizes the predicted lateral-acceleration energy in rollover-critical frequency bands. A reduced cart-roll-sloshing model explains why the critical band should be identified from the coupled acceleration-to-risk response, and the resulting Q-band term is embedded into a nonlinear model predictive tracking controller customized for semi-trailer tank trucks with acceleration smoothing, soft band constraints, preview-adaptive weights, extended-state disturbance compensation, hitch-angle-based parameter scheduling. The method is validated in simulations and 1:14 model-truck experiments, reducing peak rollover-risk proxy by xxx% while maintaining acceptable tracking error and real-time performance. Open-source implementation is available at <https://github.com/KomasaQi/HitchOpen-THICV-Stack>

Index Terms—Anti-rollover control, semi-trailer tanker, liquid sloshing, path tracking, model predictive control, frequency-band suppression.

I. Introduction

SEMI-TRAILER tank trucks are indispensable for liquid hazardous-chemical logistics, but their partially filled tanks make rollover a severe safety risk. Accident reports show that tank truck rollovers are often triggered by sharp steering, emergency avoidance, curved-road overspeed, or driver error, and may lead to deadly secondary disasters [1]–[3]. Because safety standards leave practical operation across partial filling rates [4], [5], free-surface sloshing must be considered in autonomous tank truck tracking.

Studies show that with free-surface, driving excitations generate additional sloshing, making medium filling rates yielding stronger dynamic instability than either empty or fully filled cases. And the sloshing in tank has been modeled by quasi-static centroid-shift methods, mechanical equivalent models (MEMs), computational fluid dynamics, and experiments. [6]–[10]. Among the methods, MEMs especially pendulum models are widely used for their ability to balance interpretability and real-time computation, although the dominant sloshing modes still require accurate calibration [11]–[14].

For semi-trailer tank trucks, rollover prevention is further complicated by tractor-trailer articulation. High-fidelity models may include lateral, yaw, and roll motion of tractor and trailer, respectively, as well as liquid states [15]–[18]. Such models are useful offline, but online use is limited by trailer replacement, non-unified trailer interfaces, limited trailer-side sensing, and uncertain liquid/suspension parameters. Active suspension, steering, and differential braking have all been studied for rollover prevention [19]–[21]; tank truck-specific controllers have used PID, LQR, MPC, model-free adaptive control (MFAC), and other robust control with MEMs [22]–[27].

Most existing controllers still rely on explicit liquid states, roll states, or lateral load transfer ratio (LTR) predictions. This is not always suitable for autonomous semi-trailer tank trucks with limited trailer sensing and embedded computing resources. Model predictive control (MPC) can combine tracking, actuator, acceleration, and safety constraints [28], but high-dimensional states and dense constraints challenge real-time implementation [29]. This paper therefore suppresses rollover excitation from the input side: the predicted lateral-acceleration sequence is projected onto vehicle-liquid critical bands, and the resulting energy is penalized and softly constrained. The workflow is shown in Fig. 1.

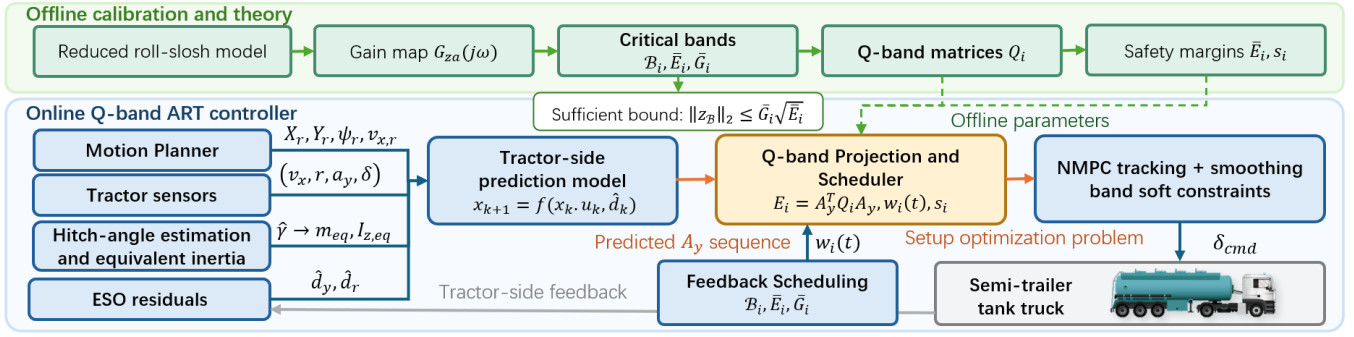


Fig. 1: Architecture of Q-band ART. Offline calibration identifies the critical bands, energy thresholds, Q-band matrices, and conservative margins. The online controller then combines tractor-side prediction, ESO residual compensation, hitch-angle-based equivalent-parameter scheduling, Q-band projection, and NMPC to output steering commands using tractor-side sensing and precomputed Q-band parameters.

The contributions are threefold. First, a Q-band anti-excitation view is introduced for semi-trailer tank truck tracking, avoiding mandatory online liquid-state modeling and observation. Second, an multi-point NMPC tracking controller with disturbance compensation and trailer-free modeling is designed specifically for semi-trailer. Third, the Q-band term is integrated predictively into the controller for anti-rollover purpose and validated through simulation and 1:14 model-truck experiments. The rest of the paper presents the model, controller, validation, and conclusions.

II. Q-Band Suppression Theory

A. Reduced Roll-Sloshing Excitation Model

Online full liquid-state prediction requires liquid-state observation [14], which is not always available. To avoid full state prediction, a reduced model is established to explain why input-side band suppression is sufficient for anti-rollover control and how dangerous frequency components are identified. The unsprung lateral motion is represented by a lateral cart, the sprung mass by a roll pendulum, and the dominant liquid mode by a pendulum attached to the tank body. Taking lateral acceleration a_y as input, the coupled roll-sloshing dynamics can be linearized as

$$\mathbf{M}\ddot{\mathbf{x}}_r + \mathbf{C}\dot{\mathbf{x}}_r + \mathbf{K}\mathbf{x}_r = \mathbf{B}_a a_y, \quad \mathbf{x}_r = [\phi, \theta]^T, \quad (1)$$

where ϕ is the tank-body roll angle, θ is the relative liquid sloshing angle, $\mathbf{M}$, $\mathbf{C}$, and $\mathbf{K}$ are the equivalent inertia, damping, and stiffness matrices, and $\mathbf{B}_a$ maps the base lateral acceleration into the roll-slosh coordinates. The off-diagonal terms in $\mathbf{M}$ and $\mathbf{K}$ describe the coupled free mode between suspension roll and liquid motion as

$$\det(\mathbf{K} - \omega^2 \mathbf{M}) = 0. \quad (2)$$

Therefore, the dangerous frequency is not the isolated liquid natural frequency or the isolated roll frequency; the two modes interact and generate a broad peak.

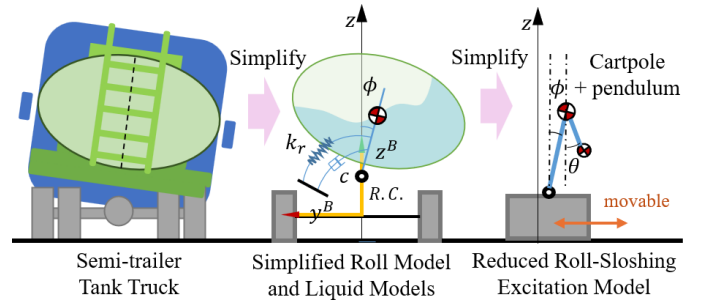


Fig. 2: Reduced lateral model. The online controller only needs the frequency response between input and output.

B. Critical Band and Risk Bound

Let the rollover-risk output be

$$z = C_z \mathbf{x}_r + D_z a_y, \quad (3)$$

where z represents LTR, roll angle, roll rate, or another rollover index, and in this work roll rate or a residual related to roll/yaw amplification is used as the measurable risk-output when available. From (1), the input-output frequency response is

$$G_{za}(s) = C_z(s^2 \mathbf{M} + s\mathbf{C} + \mathbf{K})^{-1} \mathbf{B}_a + D_z. \quad (4)$$

The Q-band $\mathcal{B}_i = [f_i^-, f_i^+]$ is selected around the broad-peak region of $|G_{za}(j2\pi f)|$, where f_i^- and f_i^+ are the lower and upper frequencies of the i th band. In this work the main band is centered on the dominant sloshing-related response, with additional bands covering secondary and higher-frequency coupled excitations.

Safety could be stated as a sufficient frequency-domain condition. Let $a_{y,\mathcal{B}}$ denote the lateral-acceleration component in a target band $\mathcal{B}$, and let $z_{\mathcal{B}}$ be the corresponding risk-output component. Around the calibrated operating point, assume that the linearized system is stable and

$$|G_{za}(j2\pi f)| \leq \bar{G}_{\mathcal{B}}, \quad f \in \mathcal{B}. \quad (5)$$

Then Parseval's relation gives

$$\|z_B\|_2^2 \leq \bar{G}_B^2 \|a_{y,B}\|_2^2. \quad (6)$$

Thus, if $\|a_{y,B}\|_2^2 \leq \bar{E}_B$, where $\bar{E}_B$ is the given band-energy threshold,

$$\|z_B\|_2 \leq \bar{G}_B \sqrt{\bar{E}_B}. \quad (7)$$

Considering static load-transfer contribution and bounded residual terms, a conservative rollover margin can be written as

$$|\text{LTR}_{\text{stat}}| + \bar{G}_B \sqrt{\bar{E}_B} + R_\perp + R_0 + R_m \leq \text{LTR}_{\text{lim}}, \quad (8)$$

where $R_\perp$, R_0 , and R_m bound non-target-band excitation, initial roll/slosh energy, and model or sensing errors, respectively. Proof: Inequality (6) follows from the frequency-domain gain bound of the stable linearized input-output model. Substituting the band-energy threshold gives (7). Adding the bounded static, off-band, initial-condition, and model-error contributions yields (8). The condition is sufficient rather than necessary, and its conservatism comes from linearization, band discretization, gain upper bounding, and residual margins.

This proof explains why limiting the band energy of a_y can reduce rollover-risk excitation even when liquid phase and true wheel loads are not observed online. The discrete Q-band matrix used by the controller is an implementable approximation of $\|a_{y,B}\|_2^2$ over the prediction horizon.

III. Adaptive Q-Band Suppression Controller

A. Tractor Prediction Model and ESO

The online optimizer uses a low-dimensional tractor-side nonlinear prediction model. Trailer force, liquid sloshing, tire mismatch, road slope, and parameter errors are not introduced as explicit states; instead, they are collected by residual terms. Let v_x , v_y , r , and δ denote tractor longitudinal speed, lateral speed, yaw rate, and front-wheel steering angle. With front and rear cornering stiffnesses C_f and C_r , the tire slip angles and lateral forces are computed as

$$\alpha_f = \delta - \frac{v_y + l_f r}{v_x}, \quad \alpha_r = -\frac{v_y - l_r r}{v_x}, \quad (9)$$

$$F_{yf} = C_f \alpha_f, \quad F_{yr} = C_r \alpha_r, \quad (10)$$

where l_f and l_r are the distances from tractor center of gravity to the front and rear axles. The nominal prediction model is

$$\begin{aligned} \dot{v}_y &= \frac{F_{yf} \cos \delta + F_{yr}}{m_{\text{eq}}} - v_x r + d_y, \\ \dot{r} &= \frac{l_f F_{yf} \cos \delta - l_r F_{yr}}{I_{z,\text{eq}}} + d_r, \end{aligned} \quad (11)$$

where m_{eq} and $I_{z,\text{eq}}$ are the hitch-angle-scheduled equivalent lateral mass and yaw inertia, and d_y, d_r are lumped lateral and yaw residuals. The lateral acceleration used by Q-band is computed from the prediction model as

$$a_{y,k}^{\text{pred}} = \dot{v}_{y,k} + v_{x,k} r_k. \quad (12)$$

An extended-state observer (ESO) estimates the yaw-channel residual:

$$\begin{aligned} \dot{\hat{r}} &= \frac{l_f \hat{F}_{yf} \cos \delta - l_r \hat{F}_{yr}}{I_{z,\text{eq}}} + \hat{d}_r + \beta_{r1}(r - \hat{r}), \\ \dot{\hat{d}}_r &= \beta_{r2}(r - \hat{r}), \end{aligned} \quad (13)$$

where $\hat{r}$ and $\hat{d}_r$ are the estimated yaw rate and yaw residual, and $\beta_{r1}, \beta_{r2} > 0$ are observer gains. The lateral residual is obtained from the difference between the measured lateral acceleration and the kinematic centripetal component:

$$\hat{d}_y = a_y^{\text{centri}} - a_y^{\text{meas}} = v_x r - (a_y^{\text{imu}} - \Delta a_{y,0}), \quad (14)$$

where a_y^{imu} is the IMU lateral acceleration, $\Delta a_{y,0}$ is its slowly updated zero offset, and $a_y^{\text{centri}} = v_x r$ is the low-dimensional centripetal estimate. In the prediction horizon, the residual is held or decayed as

$$\hat{d}_{\ell|k} = \lambda_d^\ell \hat{d}_k, \quad 0 < \lambda_d \leq 1, \quad (15)$$

where ℓ is the prediction step and λ_d is the residual forgetting factor.

B. Hitch-Angle and Equivalent Inertia

The equivalent parameters in (11) require a tractor-trailer articulation prior. Let the tractor and trailer headings be ψ_1 and ψ_2 , and define the hitch angle as

$$\gamma = \psi_1 - \psi_2. \quad (16)$$

With measured tractor yaw rate r_m , the trailer heading and hitch angle are estimated by

$$\begin{aligned} \dot{\psi}_2 &= K_v \frac{v_x}{L_2} \left(\frac{L_h}{L_1} \tan \delta \cos \hat{\gamma} + \sin \hat{\gamma} \right), \\ \dot{\hat{\gamma}} &= r_m - \dot{\psi}_2. \end{aligned} \quad (17)$$

Here L_1 is the tractor wheelbase, L_2 is the distance from the hitch to the trailer axle group, and L_h is the distance from the tractor rear axle to the hitch. The correction factor

$$K_v = 1 - \frac{m_2 v_x^2 e}{L_1 L_2 k_3} \quad (18)$$

approximates trailer-axle sideslip, where m_2 is trailer mass, e is the equivalent hitch-to-trailer geometric offset, and k_3 is the trailer axle cornering stiffness. When these trailer tire parameters are not available, $K_v = 1$ is used.

The trailer contribution is projected into tractor lateral inertia and yaw inertia:

$$m_{x,\text{eq}}(\hat{\gamma}) = m_1 + m_2 \cos^2 \hat{\gamma}, \quad m_{y,\text{eq}}(\hat{\gamma}) = m_1 + m_2 \sin^2 \hat{\gamma}, \quad (19)$$

$$I_{z,\text{eq}}(\hat{\gamma}) = I_{z1} + I_{z2} \left(\frac{d_1}{d_2} \right)^2 \cos^2 \hat{\gamma} + m_2 d_1^2 \sin^2 \hat{\gamma}. \quad (20)$$

Here m_1 is tractor mass, I_{z1} and I_{z2} are tractor and trailer yaw inertias, and d_1, d_2 are the equivalent geometric distances used to project trailer yaw inertia to the tractor yaw axis. In the NMPC model, $m_{\text{eq}} = m_{y,\text{eq}}(\hat{\gamma})$, and $I_{z,\text{eq}}$ is evaluated from (20), after low-pass filtering, upper/lower saturation, and rate limiting.

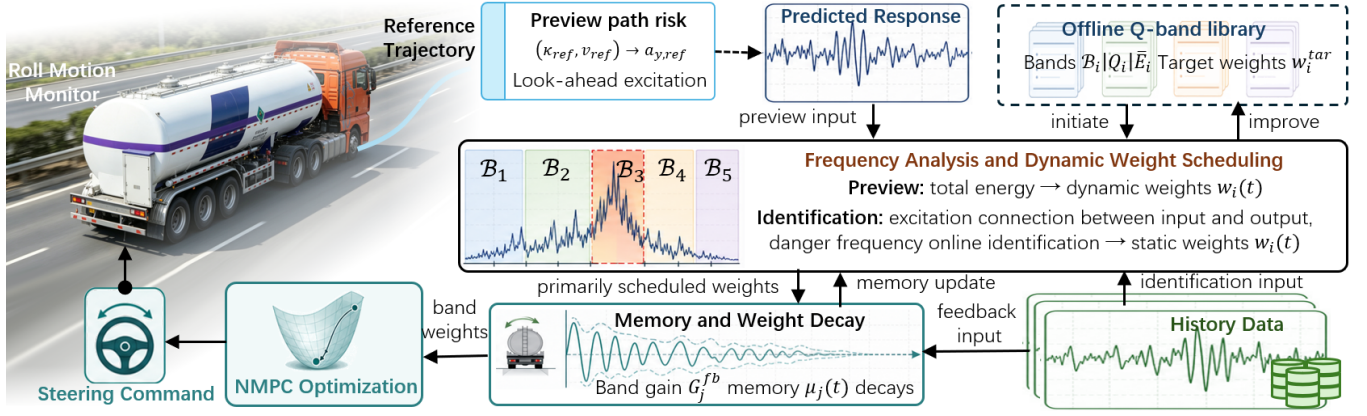


Fig. 3: Adaptive Q-band scheduling. Preview risk raises the default band weights before an aggressive path segment, while feedback band monitoring further increases the weights of dynamically amplified bands and delays weight release after residual sloshing is detected.

C. Band-Energy Projection

Let the prediction horizon contain N samples with sampling time Δt . The predicted lateral-acceleration sequence is

$$\mathbf{A}_y = [a_{y,0}, a_{y,1}, \dots, a_{y,N-1}]^T, \quad (21)$$

where $a_{y,k}$ is computed from (12) for a dynamic predictor, or from $a_{y,k} \approx v_{x,k}^2 \kappa_k$ for a kinematic predictor with path curvature κ_k . For a critical band $\mathcal{B}_i = [f_i^-, f_i^+]$, choose discrete frequencies f_{ij} and time grid $t_k = k\Delta t$. Define

$$\mathbf{c}_{ij} = [\cos(2\pi f_{ij}t_0), \dots, \cos(2\pi f_{ij}t_{N-1})]^T, \quad (22)$$

$$\mathbf{s}_{ij} = [\sin(2\pi f_{ij}t_0), \dots, \sin(2\pi f_{ij}t_{N-1})]^T. \quad (23)$$

The predicted energy in the i th band is

$$E_i(\mathbf{A}_y) = \mathbf{A}_y^T \mathbf{Q}_i \mathbf{A}_y, \quad (24)$$

$$\mathbf{Q}_i = \frac{1}{N^2} \sum_j (\mathbf{c}_{ij} \mathbf{c}_{ij}^T + \mathbf{s}_{ij} \mathbf{s}_{ij}^T) \succeq 0. \quad (25)$$

The matrix $\mathbf{Q}_i$ is precomputed from Δt , N , and $\mathcal{B}_i$. It adds no vehicle state; it only projects the predicted input sequence $\mathbf{A}_y$ onto dangerous frequency components.

D. Optimization Problem

Let $\mathbf{x}_k$ be the prediction state, $u_k = \delta_{\text{cmd},k}$ be the steering command, $\mathbf{U} = [u_0, \dots, u_{N-1}]^T$, and $\mathbf{S} = [s_1, \dots, s_{n_b}]^T$ be the nonnegative slack variables for n_b Q-bands. The Q-band ART objective is

$$\begin{aligned} \min_{\mathbf{U}, \mathbf{S}} & J_{\text{trk}} + J_u + J_{\Delta u} + w_a \|\mathbf{A}_y\|_2^2 + w_1 \|\mathbf{D}_1 \mathbf{A}_y\|_2^2 \\ & + w_2 \|\mathbf{D}_2 \mathbf{A}_y\|_2^2 + \sum_{i=1}^{n_b} w_i(t) \mathbf{A}_y^T \mathbf{Q}_i \mathbf{A}_y + \sum_{i=1}^{n_b} \rho_i s_i^2. \end{aligned} \quad (26)$$

Here $J_u = w_u \|\mathbf{U}\|_2^2$, $J_{\Delta u} = w_{\Delta u} \|\mathbf{D}_u \mathbf{U}\|_2^2$, and w_a, w_1, w_2, ρ_i are positive tuning weights. The first- and second-order difference matrices are calculated by

$$(\mathbf{D}_1 \mathbf{A}_y)_k = \frac{a_{y,k+1} - a_{y,k}}{\Delta t}, \quad (27)$$

$$(\mathbf{D}_2 \mathbf{A}_y)_k = \frac{a_{y,k+2} - 2a_{y,k+1} + a_{y,k}}{\Delta t^2}. \quad (28)$$

The tracking cost uses the previewed reference position and heading:

$$J_{\text{trk}} = w_{xy} (\|\mathbf{X} - \mathbf{X}_{\text{ref}}\|_2^2 + \|\mathbf{Y} - \mathbf{Y}_{\text{ref}}\|_2^2) + w_\psi \|\boldsymbol{\psi} - \boldsymbol{\psi}_{\text{ref}}\|_2^2, \quad (29)$$

where $\mathbf{X}$, $\mathbf{Y}$, and $\boldsymbol{\psi}$ collect predicted tractor positions and headings over the horizon, and the subscript “ref” denotes the path-preview sequence.

The constraints are

$$\begin{aligned} \mathbf{x}_{k+1} &= f(\mathbf{x}_k, u_k, \hat{d}_{k|k}, m_{\text{eq}}, I_{z,\text{eq}}), \\ |a_{y,k}| &\leq a_{y,\text{max}}^{\text{dyn}}, \\ u_{\min} &\leq u_k \leq u_{\max}, \quad |\Delta u_k| \leq \Delta u_{\max}, \\ E_i(\mathbf{A}_y) &\leq \bar{E}_i + s_i, \quad s_i \geq 0. \end{aligned} \quad (30)$$

The bound $a_{y,\text{max}}^{\text{dyn}}$ is the speed- and risk-dependent lateral-acceleration limit, and $\bar{E}_i$ is the calibrated safe energy threshold of band $\mathcal{B}_i$.

E. Preview-Adaptive Scheduling

Q-band ART uses preview risk as the main trigger. The reference lateral-acceleration sequence $\mathbf{A}_{y,\text{ref}}$ is computed from future path curvature as

$$a_{y,\text{ref},k} = v_{x,k}^2 \kappa_{\text{ref},k}, \quad \kappa_{\text{ref},k} \approx \frac{\text{wrap}(\psi_{\text{ref},k+1} - \psi_{\text{ref},k})}{\Delta s_k}, \quad (31)$$

where Δs_k is the preview arc-length interval and $\text{wrap}(\cdot)$ keeps heading differences within $[-\pi, \pi]$. The preview risk in band i is

$$R_i^{\text{pre}} = \left[\frac{\mathbf{A}_{y,\text{ref}}^T \mathbf{Q}_i \mathbf{A}_{y,\text{ref}}}{\bar{E}_{i,\text{ref}}} - 1 \right]_+, \quad (32)$$

where $[x]_+ = \max(x, 0)$ and $\bar{E}_{i,\text{ref}}$ is the preview activation threshold. The preview-only activation is

$$\lambda_i^{\text{pre}} = 1 - \exp(-\kappa_{\text{pre}} R_i^{\text{pre}}), \quad (33)$$

where $\kappa_{\text{pre}} > 0$ controls how quickly the weight rises before an aggressive maneuver.

F. Feedback Band Monitoring and Residual Sloshing Memory

Preview alone cannot identify a frequency that becomes dangerous because of current loading, liquid fill level, tire state, or unmodeled trailer dynamics. Therefore, a feedback monitor is added to identify bands in which the input exists and the measured output is significantly amplified. Over a sliding window of M samples, define the input vector

$$\mathbf{a}_M(t) = [a_y^{\text{mon}}(t - M + 1), \dots, a_y^{\text{mon}}(t)]^T, \quad (34)$$

where a_y^{mon} is the measured or predicted lateral acceleration after offset correction. The monitored output is

$$y^{\text{mon}} \in \{r - \hat{r}, a_y^{\text{imu}} - a_y^{\text{pred}}, \dot{\phi}\}, \quad (35)$$

with the output window

$$\mathbf{y}_M(t) = [y^{\text{mon}}(t - M + 1), \dots, y^{\text{mon}}(t)]^T. \quad (36)$$

The yaw residual and acceleration residual are available from tractor-side sensing, and roll rate $\dot{\phi}$ is used when a roll sensor exists on the validation platform. For a candidate monitoring band $\mathcal{C}_j$, construct $\mathbf{Q}_j^M$ in the same way as $\mathbf{Q}_i$ but using window length M . The input and output band energies are

$$E_{a,j}^{\text{fb}} = \mathbf{a}_M^T \mathbf{Q}_j^M \mathbf{a}_M, \quad E_{y,j}^{\text{fb}} = \mathbf{y}_M^T \mathbf{Q}_j^M \mathbf{y}_M, \quad (37)$$

and the observed amplification is

$$G_j^{\text{fb}} = \sqrt{\frac{E_{y,j}^{\text{fb}}}{E_{a,j}^{\text{fb}} + \epsilon}}, \quad (38)$$

where ϵ avoids division by zero. A dynamically identified dangerous band must satisfy both non-negligible input and amplified output, which is encoded by

$$R_j^{\text{fb}} = \left[\frac{E_{a,j}^{\text{fb}}}{\bar{E}_{a,j}} - 1 \right]_+ \left[\frac{G_j^{\text{fb}}}{\bar{G}_j^{\text{fb}}} - 1 \right]_+. \quad (39)$$

Here $\bar{E}_{a,j}$ is the minimum input-energy threshold for declaring that the band is excited, and $\bar{G}_j^{\text{fb}}$ is the nominal amplification level obtained from calibration or low-risk data.

To remember residual sloshing after the steering input has decreased, the feedback risk is stored as

$$\mu_j(t) = \max\{\lambda_m \mu_j(t - \Delta t), R_j^{\text{fb}}(t)\}, \quad 0 < \lambda_m < 1, \quad (40)$$

where λ_m is the memory decay factor. If the monitoring bands $\mathcal{C}_j$ are finer than the default controller bands $\mathcal{B}_i$, the feedback memory is mapped to the controller band by the overlap ratio

$$\mu_i^{\text{dyn}}(t) = \max_j \sigma_{ij} \mu_j(t), \quad \sigma_{ij} = \frac{|\mathcal{B}_i \cap \mathcal{C}_j|}{|\mathcal{B}_i|}. \quad (41)$$

Thus, bands that are observed to be both excited and amplified act as dynamically identified dangerous bands and increase the default Q-band weights.

The preview and feedback activations are fused before filtering:

$$\lambda_i(t) = 1 - \exp[-\kappa_{\text{pre}} R_i^{\text{pre}} - \kappa_{\text{fb}} \mu_i^{\text{dyn}}(t)], \quad (42)$$

$$w_{i,\text{tar}}^{\text{dyn}}(t) = \min\{w_i^{\text{max}}, w_i^{\text{tar}}(1 + \eta_{\text{fb}} \mu_i^{\text{dyn}}(t))\}, \quad (43)$$

$$w_i^{\text{raw}}(t) = w_i^{\text{min}} + \lambda_i(t) (w_{i,\text{tar}}^{\text{dyn}}(t) - w_i^{\text{min}}). \quad (44)$$

Here κ_{fb} and η_{fb} tune the feedback contribution, w_i^{min} is the low-risk weight, w_i^{tar} is the nominal calibrated target weight, and w_i^{max} prevents excessive conservatism. Finally, a non-symmetric filter is applied:

$$w_i(t) = (1 - \alpha_i) w_i(t - \Delta t) + \alpha_i w_i^{\text{raw}}(t), \quad (45)$$

where $\alpha_i = \alpha_{\uparrow}$ when $w_i^{\text{raw}} > w_i(t - \Delta t)$ and $\alpha_i = \alpha_{\downarrow}$ otherwise, with $\alpha_{\uparrow} > \alpha_{\downarrow}$. This makes the weight rise quickly when preview or feedback detects risk, and decay slowly while residual sloshing memory remains.

G. Implementation Notes

The Q-band module is model-agnostic. For a kinematic predictor, $a_{y,k}$ can be approximated from curvature or steering; for a dynamic predictor, it can be computed from $\dot{v}_y + v_x r$; for TruckSim or model-truck validation, it is evaluated from the predicted tracking response. In all cases, the controller suppresses the lateral excitation sequence rather than explicitly controlling the liquid state.

IV. Validation

A. 5-Pins Simulation Setup

The proposed controller was first evaluated in a 5-pins lane-change simulation. The reference path contains five consecutive double-lane-change maneuvers with the same lateral displacement of 3.5 m and progressively shorter maneuver durations, starting from 4 s. This setting produces a continuous risk gradient: the first two double lane changes are mild, the third is transitional, and the fourth and fifth contain strong lateral excitation. The controlled object follows the semi-trailer tank truck setting used in TruckSim validation, while the Q-band module only uses the predicted lateral-acceleration sequence in the controller.

Fifteen controller variants were compared, including baseline tracking, lateral-acceleration hard constraint, acceleration magnitude/difference penalties, fixed Q-band, preview-adaptive Q-band, feedback-assisted Q-band, and Q-band soft constraints. The main metrics are peak $|\text{LTR}_{\text{est}}|$, RMS LTR, peak lateral acceleration, RMS tracking error, and segment-wise tracking/safety indicators.

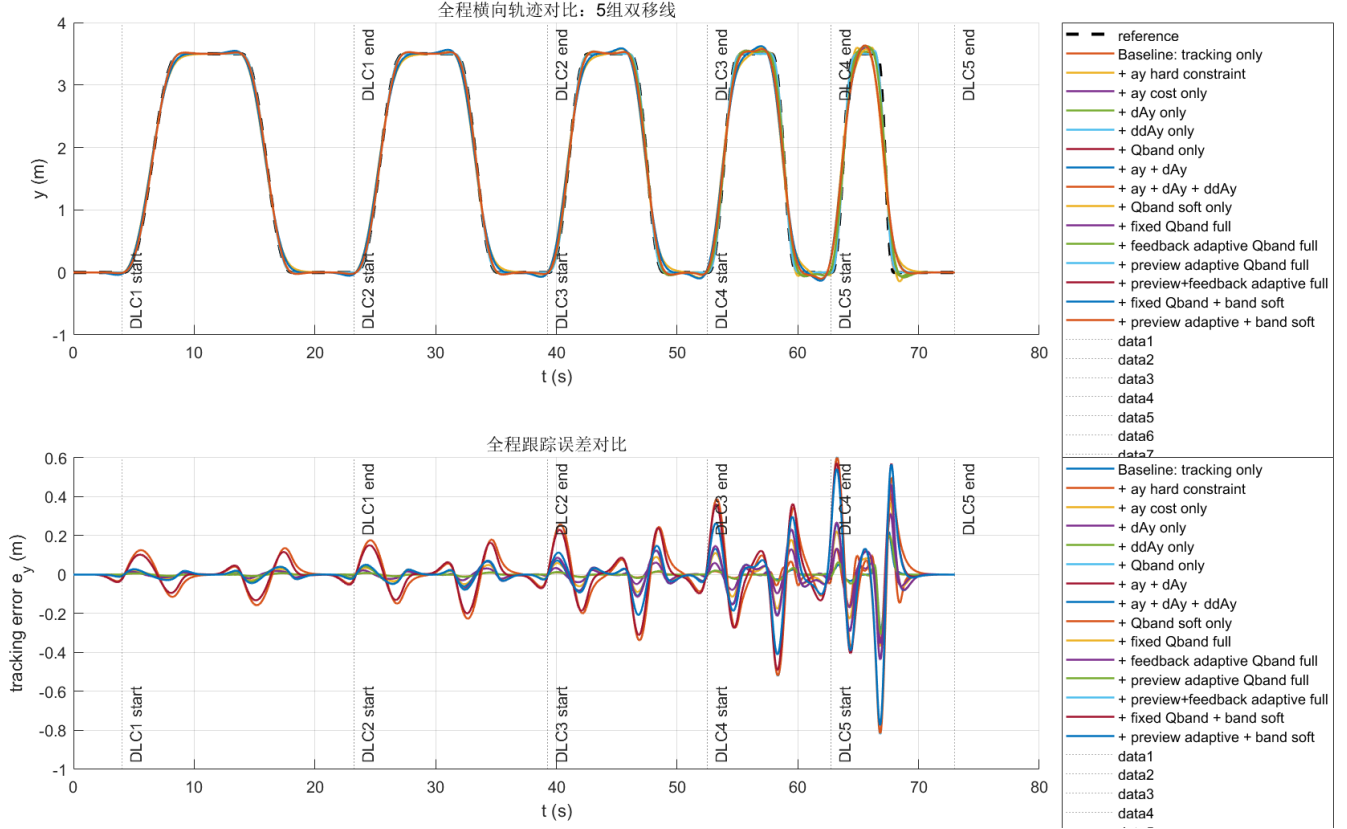


Fig. 4: Five-pins tracking results. Low-risk segments are tracked closely by all methods; in the high-risk DLC4–DLC5 segments, Q-band and soft-constraint variants intentionally allow moderate path deviation to reduce rollover excitation.

B. Simulation Results

Fig. 4 shows that all controllers track the first three maneuvers with small errors. As the maneuver duration decreases, the baseline tracker maintains path accuracy but injects stronger oscillatory lateral acceleration. Q-band methods begin to relax tracking in DLC4 and DLC5, especially near the lane-return phases, where the predicted acceleration would otherwise fall into the critical band. The largest temporary tracking deviation is approximately xxx m in the current simulation and remains acceptable for the intended emergency maneuver envelope.

The ablation results in Fig. 5 show three trends. First, the baseline peak $|LTR_{est}|$ reaches about xxx, exceeding the rollover-risk limit. Second, acceleration magnitude and difference penalties reduce part of the risk but cannot consistently suppress the critical high-risk segments. Third, fixed or adaptive Q-band variants reduce peak $|LTR_{est}|$ to approximately xxx–xxx and lower RMS LTR from xxx to xxx. The preview-adaptive and soft-constraint variants provide the most consistent reduction because the weights rise before DLC4–DLC5 and the optimizer is discouraged from placing energy in the critical band.

Segment-wise results in Fig. 6 further confirm that Q-band ART is mainly activated in the dangerous sections. In DLC1 and DLC2, all methods have similar peak $|LTR|$

and tracking error. In DLC3 the Q-band methods begin to separate from acceleration-only regularization. In DLC4 and DLC5, the baseline and acceleration-only strategies approach or exceed the risk threshold, while Q-band variants keep the peak risk proxy near xxx. This supports the design goal: low-risk segments remain close to ordinary tracking, and high-risk segments are reshaped to suppress dangerous lateral excitation.

C. Model-Truck Experiment

The 1:14 semi-trailer tank truck experiment was conducted to verify that the Q-band mechanism remains effective on a physical platform. The experiment used a double-lane-change or 5-pins-like reference path scaled according to the model-truck operating envelope. Baseline tracking and Q-band ART were compared under the same speed and filling-rate settings. The measured responses include path tracking, steering command, lateral acceleration, roll/yaw response, liquid-surface motion when available, and controller solve time.

The model-truck results show the same qualitative behavior as the simulation. Baseline tracking follows the reference more tightly but excites larger roll-slosh motion, and the anti-roll support/contact or rollover-risk proxy reaches xxx. Q-band ART reduces the peak risk proxy



Fig. 5: Ablation summary for the 5-pins simulation. Q-band-based variants reduce both peak $|LTR_{est}|$ and RMS LTR compared with baseline tracking, while the safety improvement is obtained at the cost of controlled tracking relaxation.

TABLE I: Validation Summary With Replaceable Results

Case	Peak risk proxy	RMS error	Solve time
Simulation baseline	xxx	xxx m	xxx ms
Simulation Q-band ART	xxx	xxx m	xxx ms
Model-truck baseline	xxx	xxx m	—
Model-truck Q-band ART	xxx	xxx m	xxx ms

by xxx%, keeps the liquid/roll response within xxx, and increases RMS tracking error from xxx m to xxx m. The controller average and peak solve times are xxx ms and xxx ms, respectively, satisfying the real-time requirement of the experimental platform.

V. Conclusion

This paper proposed Q-band ART, an adaptive frequency-band suppression method for anti-rollover tracking of semi-trailer tank trucks. Instead of requiring liquid sloshing states or wheel-load-based LTR as online controller states, the method suppresses the predicted lateral-acceleration energy in critical vehicle-liquid bands. A reduced roll-sloshing model provides the frequency-

domain safety interpretation, and the Q-band term is integrated with acceleration smoothing, soft constraints, preview-adaptive scheduling, ESO disturbance compensation, and hitch-angle-based parameter scheduling.

The 5-pins simulation and 1:14 model-truck experiment show that Q-band ART reduces peak rollover-risk proxy from xxx to xxx and improves RMS LTR/risk response by xxx%, while keeping tracking error and computation time within acceptable ranges. The results indicate that input-side critical-band suppression is a practical complement to explicit rollover-state constraints, especially when trailer-side sensing and liquid-state observation are limited. Future work will refine critical-band calibration across filling rates and integrate Q-band scheduling with combined steering and braking control.

References

- [1] S. Cheng and F. Yang, “Statistical and grey relation analysis of hazardous chemicals accidents in china from 2011 to 2020,” *Applied Chemical Industry*, vol. 52, no. 1, pp. 1–5, 2023.
- [2] Y. Wang, S. Shi, L. Zhong et al., “Temporal and spatial distribution of road transportation accidents of dangerous chemicals tank vehicles in 2013–2017,” *Journal of Hunan University of Science and Technology (Natural Science Edition)*, vol. 37, no. 2, pp. 1–5, 2022.

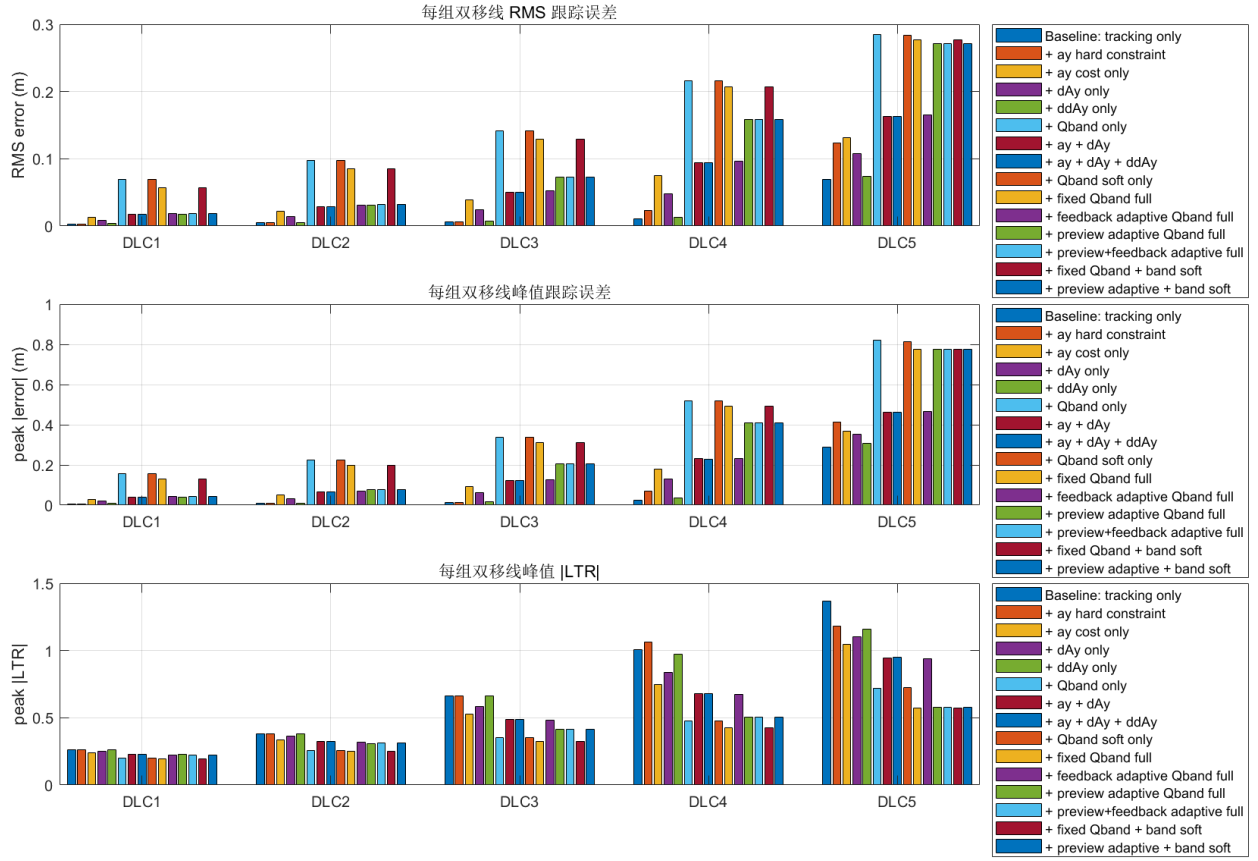


Fig. 6: Segment-wise 5-pins metrics. The difference among methods is small in DLC1–DLC2, becomes visible in DLC3, and is dominated by the safety-tracking tradeoff in DLC4–DLC5.

- [3] S. Lyu, S. H. Zhang, X. M. Huang et al., “Investigation and modeling of the lpg tank truck accident in wenling, china,” *Process Safety and Environmental Protection*, vol. 1, no. 157, pp. 493–508, 2022.
- [4] I. General Administration of Quality Supervision and Q. of the People’s Republic of China, GB 18564.1-2006 Road Transportation of Liquid Dangerous Goods - Part 1: Technical Requirements for Metal Atmospheric Tanks, Std., 2006.
- [5] S. A. for Market Regulation, TSG R0005-2011 Supervision Regulation on Safety Technology for Transportable Pressure Vessel, Std., 2011.
- [6] H. Mao, B. Li, S. Bei et al., “Research on roll stability of liquid tanker based on fluid-solid coupling,” *Journal of Jiangsu University of Technology*, vol. 27, no. 4, p. 12, 2021.
- [7] Y. Huang, G. Deng, and X. Zhang, “Analysis of instant liquid shock effect of non-full-filled tank in course of turning,” *Chemical Engineering & Machinery*, 2017.
- [8] Y. Wan, “Study on vehicle-liquid coupling dynamic characteristics and anti-rollover control method for tank vehicles,” Ph.D. dissertation, Jilin University, Changchun, 2020.
- [9] X. Wang, Q. Chen, and J. Wang, “Analysis on the influence of lateral acceleration on lateral stability of non-full-load liquid tanker,” *Journal of Anhui Polytechnic University*, no. 4, p. 37, 2022.
- [10] Y. Chen, S. Rakheja, and W. Shangguan, “Modified design and safety analysis of tank cross section based on roll stability,” *Journal of Vibration and Shock*, vol. 35, no. 6, p. 6, 2016.
- [11] X. Jia, Z. Zhang, and D. Jiang, “Research status of influence of liquid sloshing in tank on rollover stability of semi-loaded tank truck,” *Automobile Applied Technology*, vol. 47, no. 1, pp. 193–196, 2022.
- [12] M. I. Salem, “Rollover stability of partially filled heavy-duty elliptical tankers using trammel pendulums to simulate fluid sloshing,” Ph.D. dissertation, West Virginia University, Morgantown, 2000.
- [13] X. Yang, Y. Xing, X. Wu et al., “Multi mass elliptical pendulum model for lateral liquid sloshing of liquid tank truck,” *Journal of Transportation Engineering*, vol. 18, no. 5, p. 12, 2018.
- [14] X. Qi, B. Gao, and Y. Zhang, “Observing liquid sloshing based on a multi-degree-of-freedom pendulum model and free surface fluctuation sensor,” *Sensors*, vol. 23, no. 21, p. 8831, 2023.
- [15] Y. Ren, X. Li, X. Zheng et al., “Accurate dynamics modeling and roll stability of tank vehicle,” *Journal of Shanghai Jiaotong University*, vol. 54, no. 3, p. 10, 2020.
- [16] Z. Yu, X. Cheng, J. Li et al., “Simulation analysis of lateral stability for liquid tank truck based on model predictive control,” *Journal of Changchun University of Technology*, 2018.
- [17] Z. Zong, Z. Nie, and Z. Zhang, “Parameters identification for simplified model of container semi-trailer,” *China Journal of Highway and Transport*, vol. 27, no. 4, p. 9, 2014.
- [18] Z. Nie and Z. Zong, “A study on the parameters identification of simplified models for articulated heavy vehicles,” *Automotive Engineering*, vol. 37, no. 6, p. 10, 2015.
- [19] L. Xiao, M. Wang, B. Zhang et al., “Vehicle roll stability control with active roll-resistant electro-hydraulic suspension,” *Frontiers of Mechanical Engineering*, vol. 15, no. 1, pp. 43–54, 2020.
- [20] C. R. Carlson and J. C. Gerdes, “Optimal rollover prevention with steer by wire and differential braking,” in *Proceedings of the ASME International Mechanical Engineering Congress and Exposition (IMECE 2003)*. Washington, DC, USA: ASME, 2003.

- [21] Y.-Y. Xu, J.-S. Wang, Z.-L. Jin et al., “Rollover prevention control based on active-steering and differential-braking,” *Computer Simulation*, 2011.
- [22] W. Zhao, R. Feng, and Z. Zong, “Anti-rollover control strategy of tank trucks based on equivalent sloshing model,” *Journal of Jilin University (Engineering and Technology Edition)*, vol. 48, no. 1, pp. 1–6, 2018.
- [23] W. Zhao, J. Ling, and Z. Zong, “Development of anti-rollover control strategy for liquid tank semi-trailer,” *Automotive Engineering*, vol. 41, no. 1, pp. 1–7, 2019.
- [24] W. Sun, Y. Liu, S. Li, F. Wang, and W. Li, “Rollover prevention control of the tank semi-trailer considering sloshing of the liquid,” *International Journal of Heavy Vehicle Systems*, vol. 28, pp. 752–752, 2021.
- [25] X.-S. Li, Y.-Y. Ren, and X.-L. Zheng, “Model-free adaptive control for tank truck rollover stabilization,” *Mathematical Problems in Engineering*, vol. 2021, p. 8417071, AUG 2021.
- [26] W. Zhao, L. Ji, and C. Wang, “ H_∞ control of integrated rollover prevention system based on improved lateral load transfer rate,” *Transactions of the Institute of Measurement and Control*, vol. 41, no. 3, pp. 859–874, 2019.
- [27] X. Qi, Y. Luo, B. Gao et al., “Anti-rollover path tracking control for an autonomous semi-trailer tank truck,” *IEEE Transactions on Intelligent Transportation Systems*, vol. 26, no. 7, pp. 9932–9947, 2025.
- [28] J. Gong, K. Liu, and J. Qi, *Model Predictive Control for Autonomous Vehicles*. Beijing: Beijing Institute of Technology Press, 2020.
- [29] S. E. Li, Z. Jia, K. Li et al., “Fast online computation of a model predictive controller and its application to fuel economy-oriented adaptive cruise control,” *IEEE Transactions on Intelligent Transportation Systems*, vol. 16, no. 3, pp. 1199–1209, 2015.