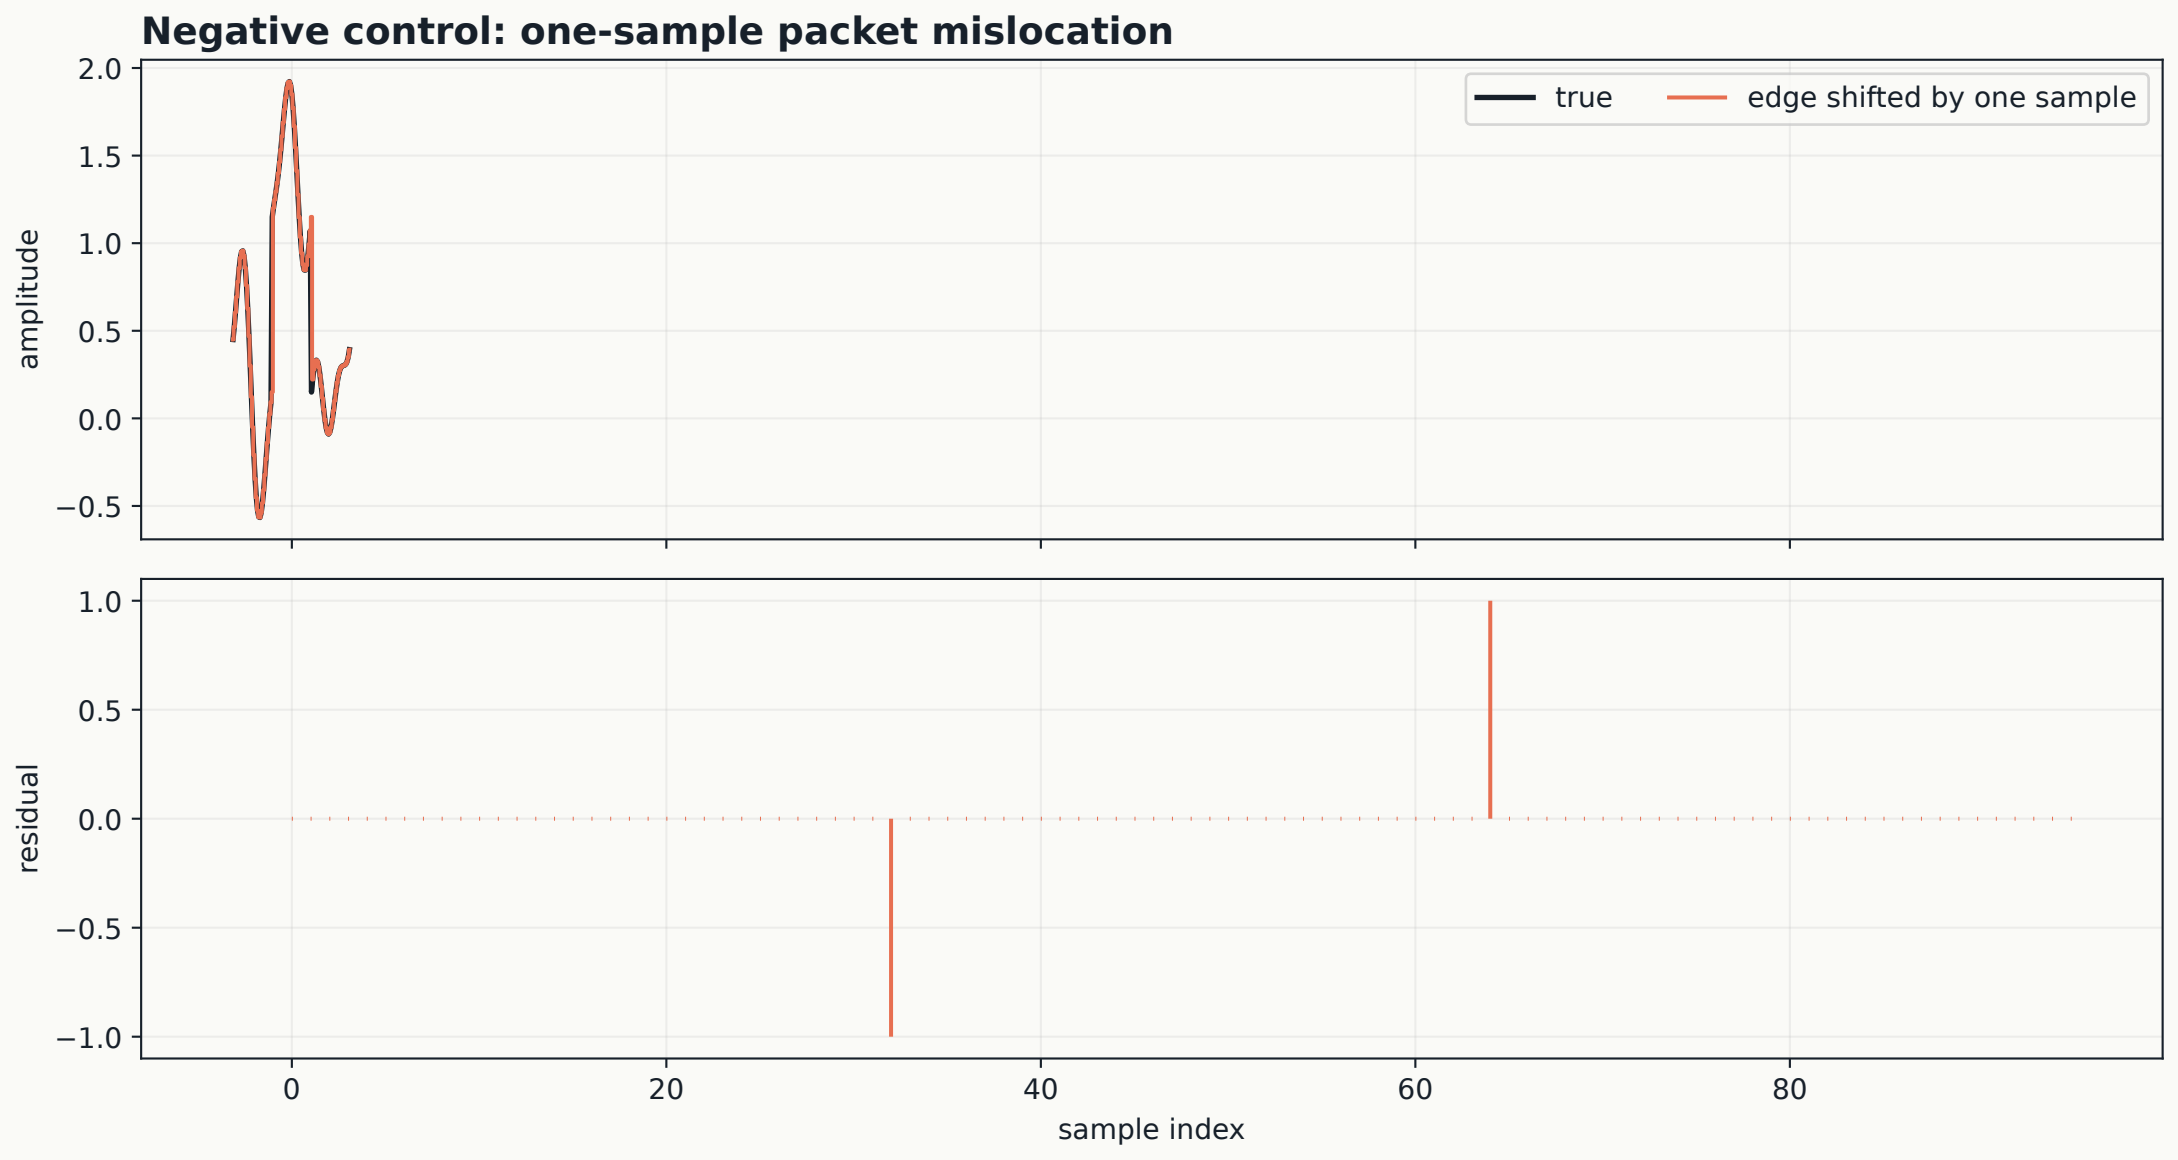
Negative control: one-sample packet mislocation
true
edge shifted by one sample
amplitude
residual
sample index
2.0
1.5
1.0
0.5
0.0
−0.5
1.0
0.5
0.0
−0.5
−1.0
0
20
40
60
80