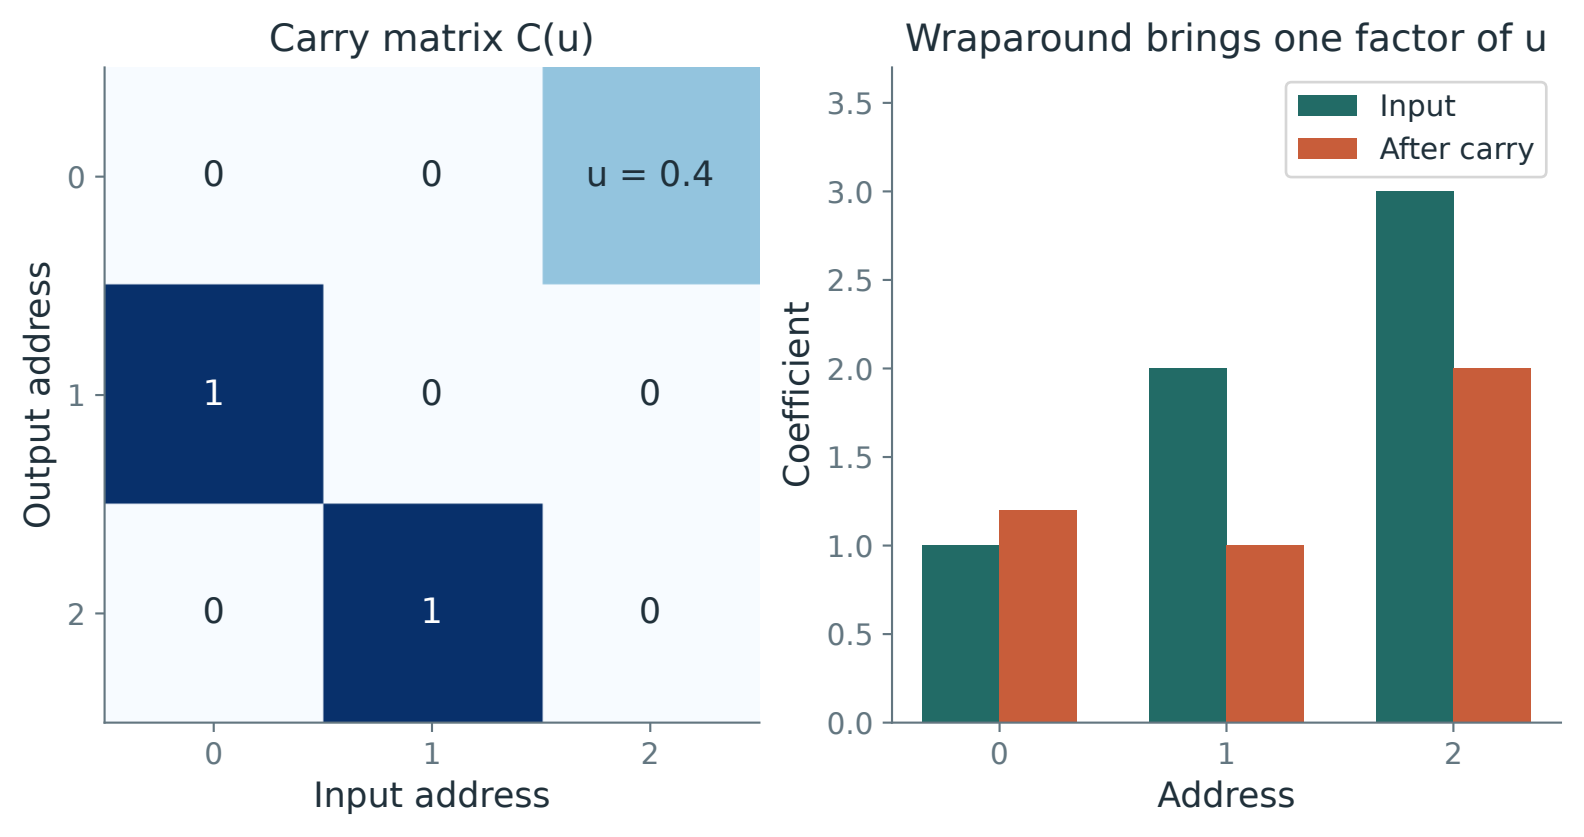
Carry matrix C(u)
0
0
u = 0.4
1
0
0
0
1
0
Output address
0
1
2
Input address
Wraparound brings one factor of u
Input
After carry
Coefficient
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
0
1
2
Address