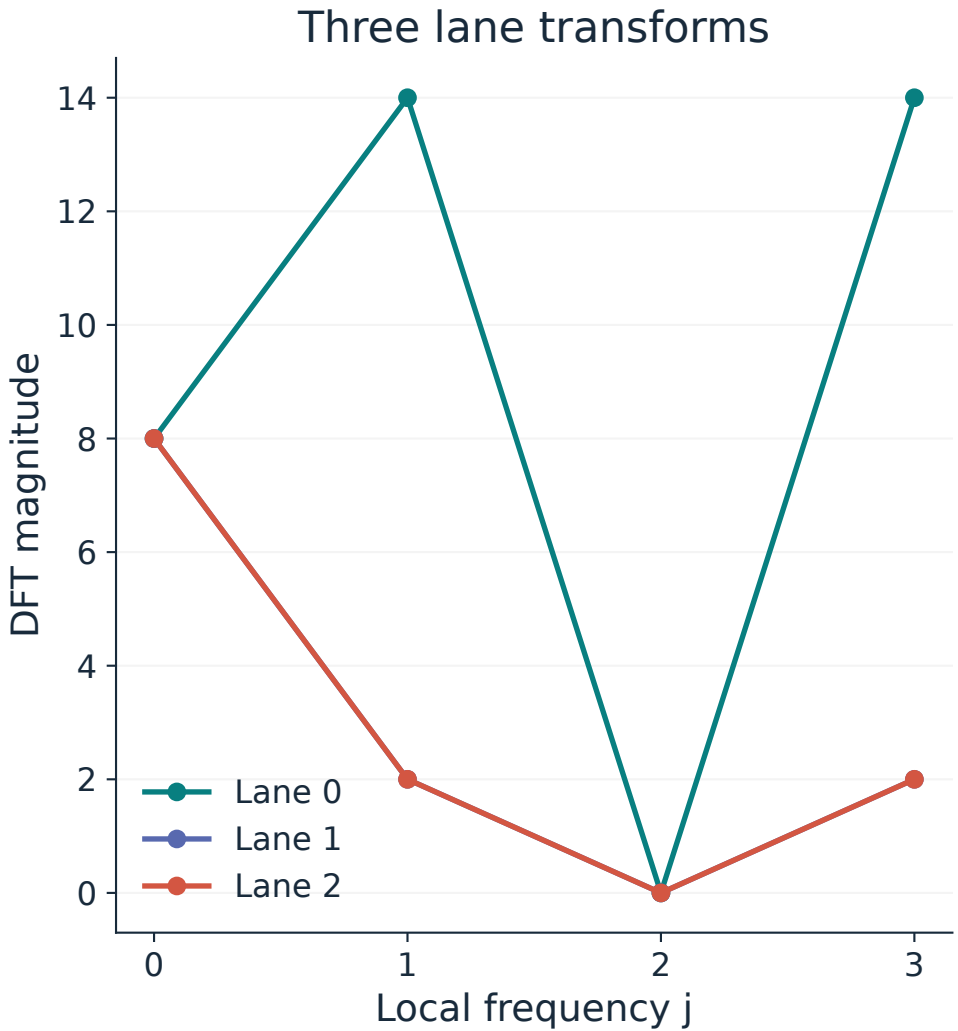
Three lane transforms
DFT magnitude
Local frequency j
Lane 0
Lane 1
Lane 2
0
2
4
6
8
10
12
14
0
1
2
3

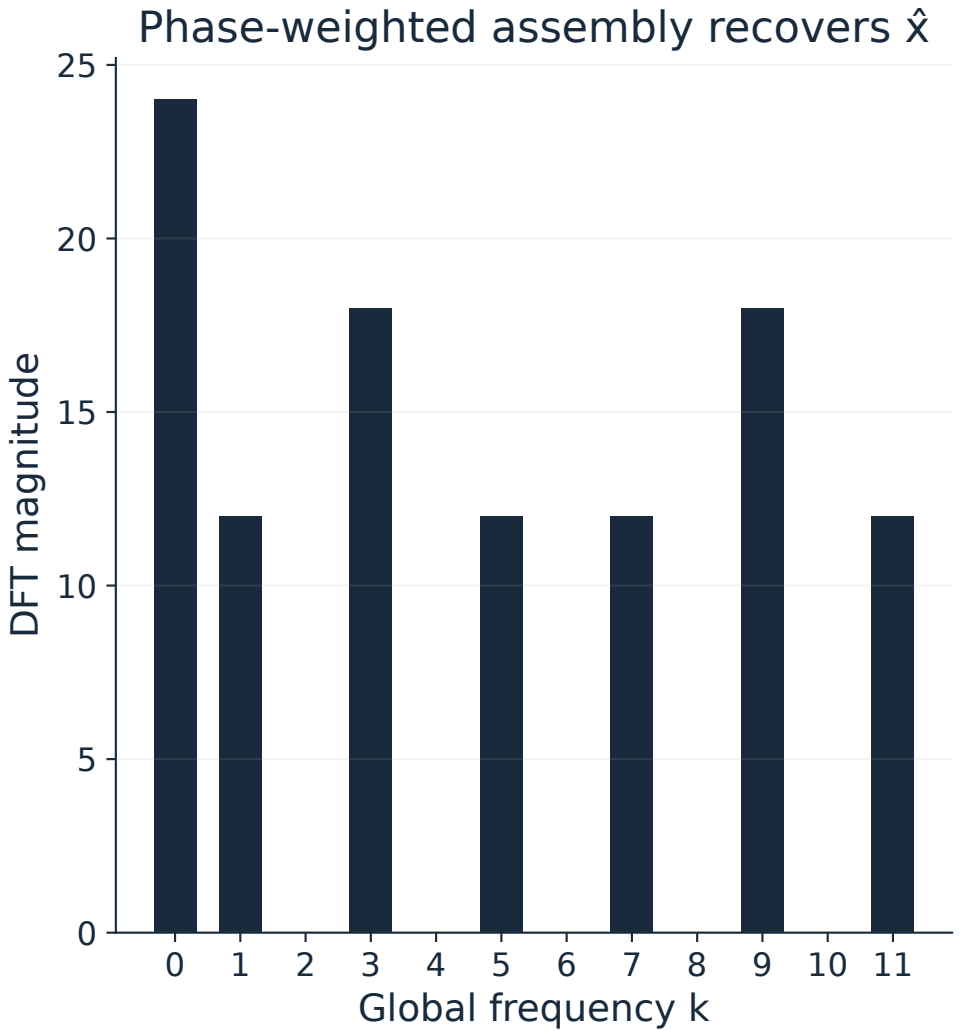
Phase-weighted assembly recovers x̂
DFT magnitude
Global frequency k
0
5
10
15
20
25
0
1
2
3
4
5
6
7
8
9
10
11