
## REVISION E

## RECOMMENDED PCB LAYOUT FOR PTF

10/12/2004 ECN-39821


DO NOT SCALE FROM THIS PRINT




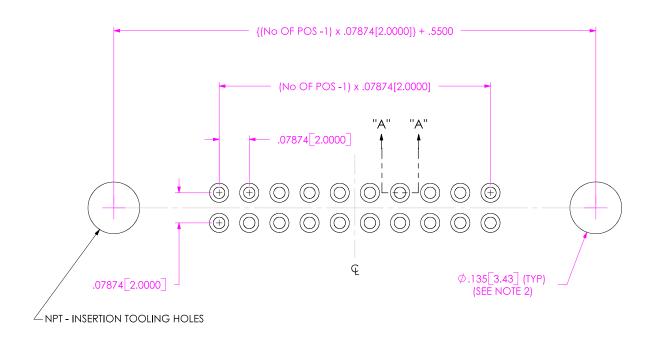

1. MAX HARDNESS OF COPPER LAYER: 150 KNOOP.
2. ALL DIMENSIONS ARE SYMMETRICAL ABOUT CENTERLINE WITHIN .002 UNLESS OTHERWISE STATED

E	TABLE 1			
		Α	В	С
	TIN / LEAD	0.035	.030 <u>+</u> .003	0.005 MAX
	GOLD	0.035	.032 <u>+</u> .003	N/A
	SILVER	0.035	.032 <u>+</u> .003	N/A



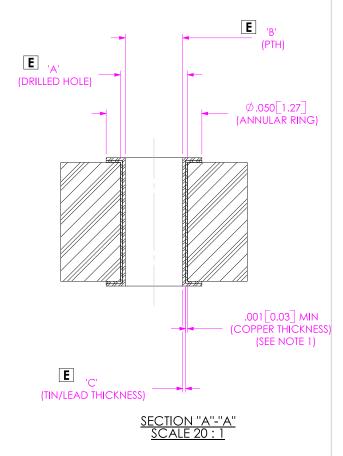

## PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812.944.6733 FAX: 812.948.5047 e-Mail: INFO@SAMTEC.COM CODE: 55322

