
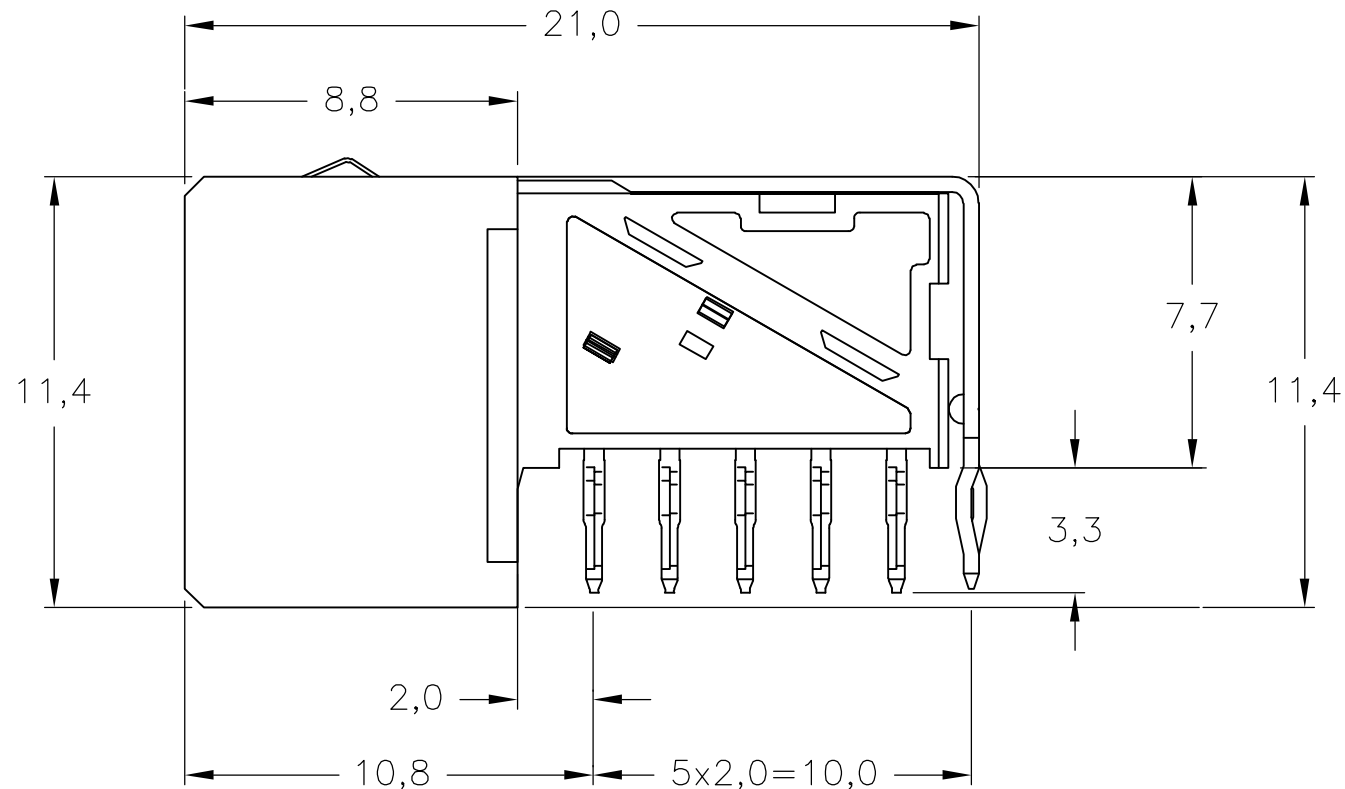
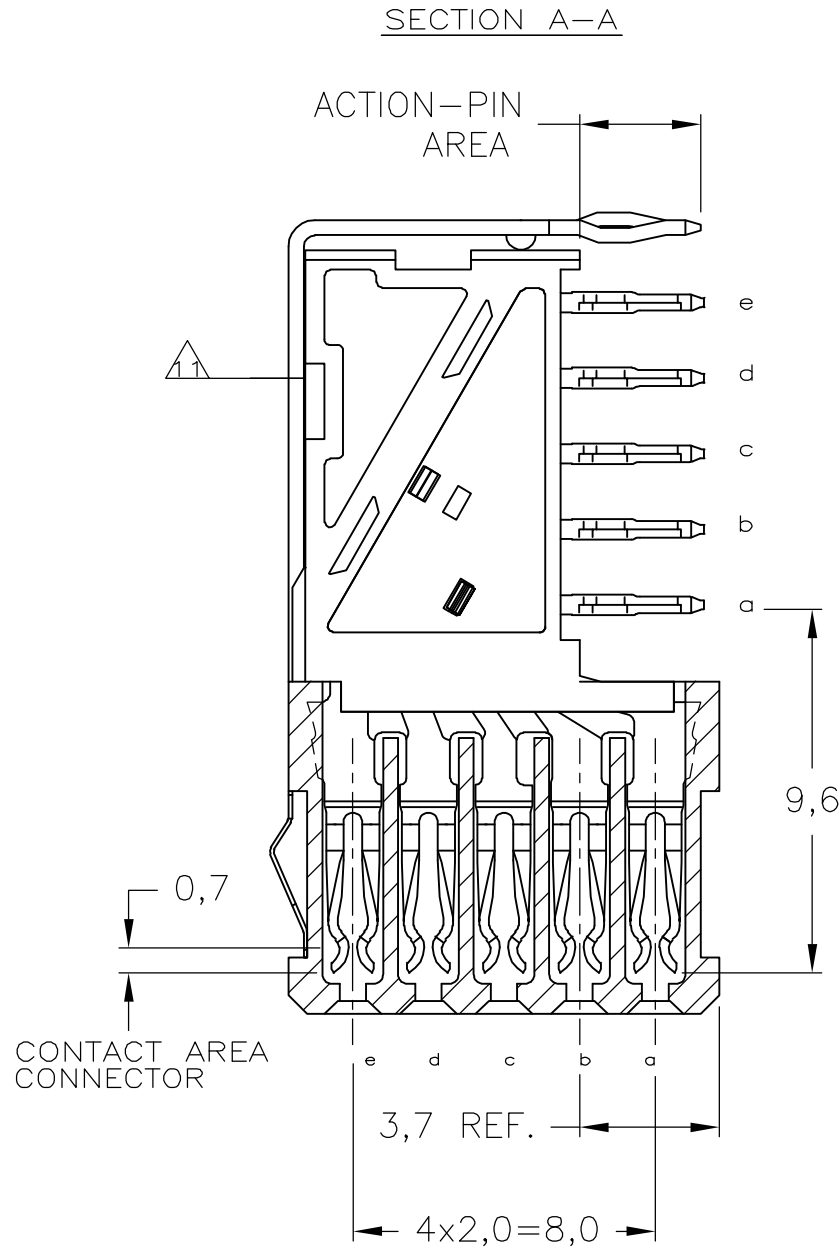
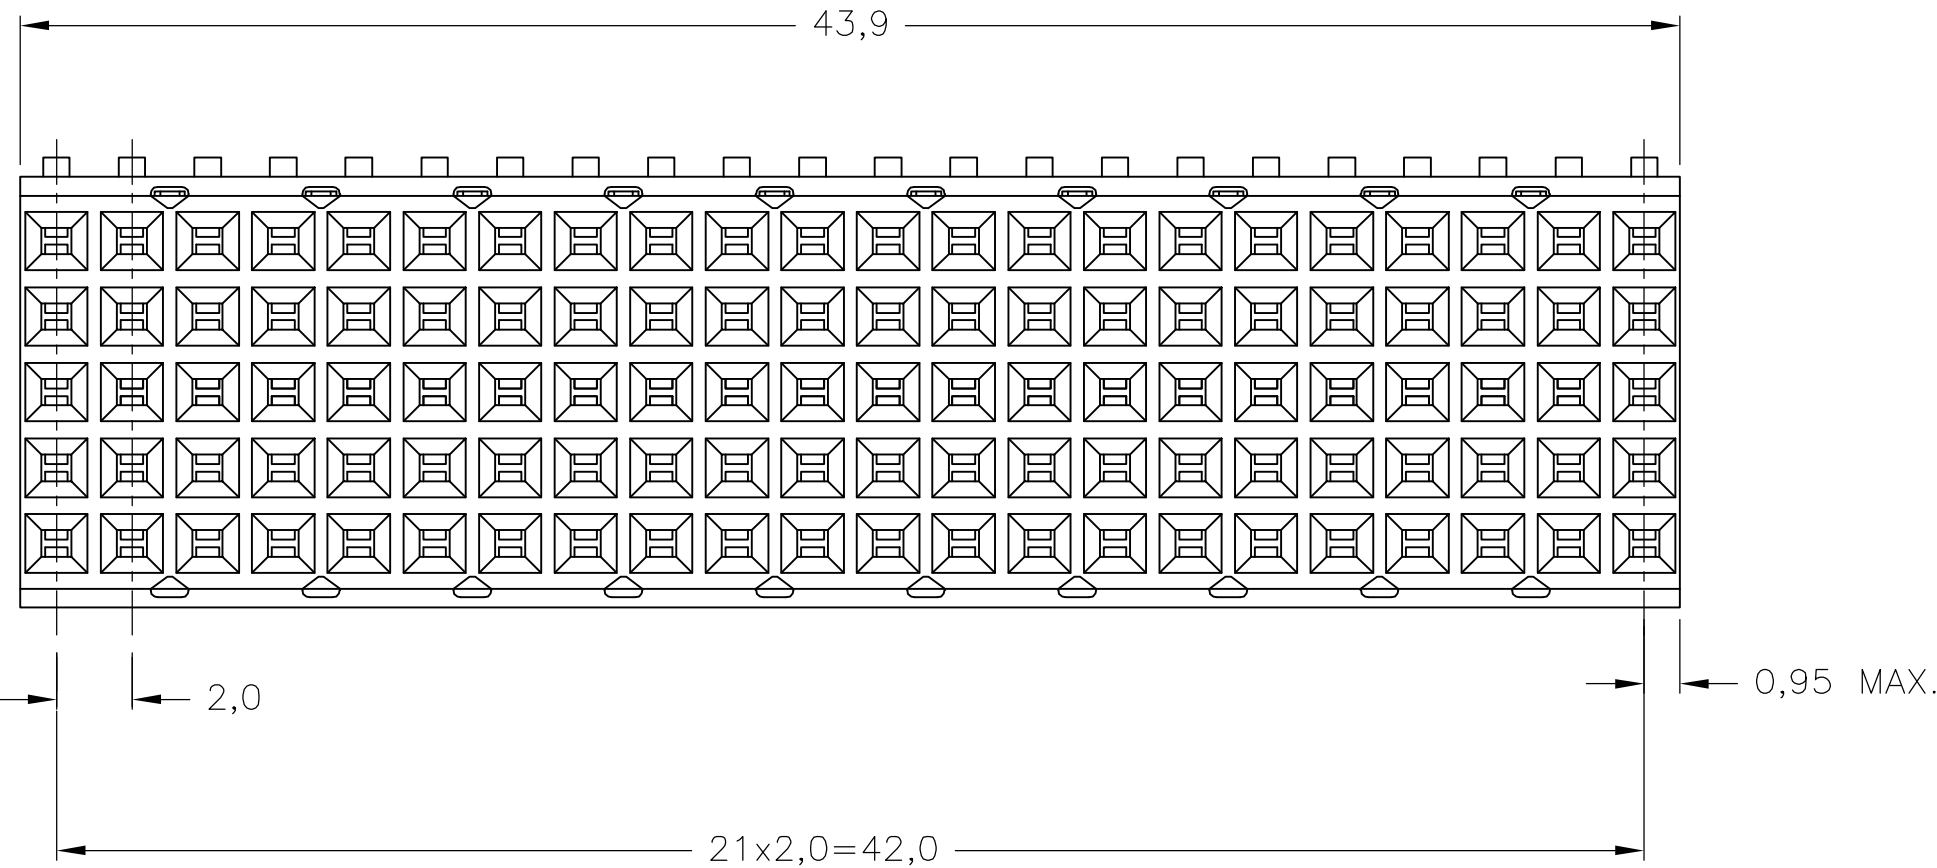



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		B	EH10-0680-05	31MAY05	BSV	BM

- NOTES:
- ⚠ MATERIAL CONTACTS; PHOSPHORBRONZE
 - ⚠ MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - ⚠ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - ⚠ PLATING SHIELD:
CONTACT AREA: 0,76µm Au MIN.
ACTION PIN : 0,5µm Sn MIN.
REMAINDER : Ni
 - ⚠ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-22 COLUMNS
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - ⚠ ROW "f" 11 PLATED THROUGH HOLES FOR UPERSHIELD
 - ⚠ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE
 - 12 BASIC P.N. LOWERSHIELD : 5352468.

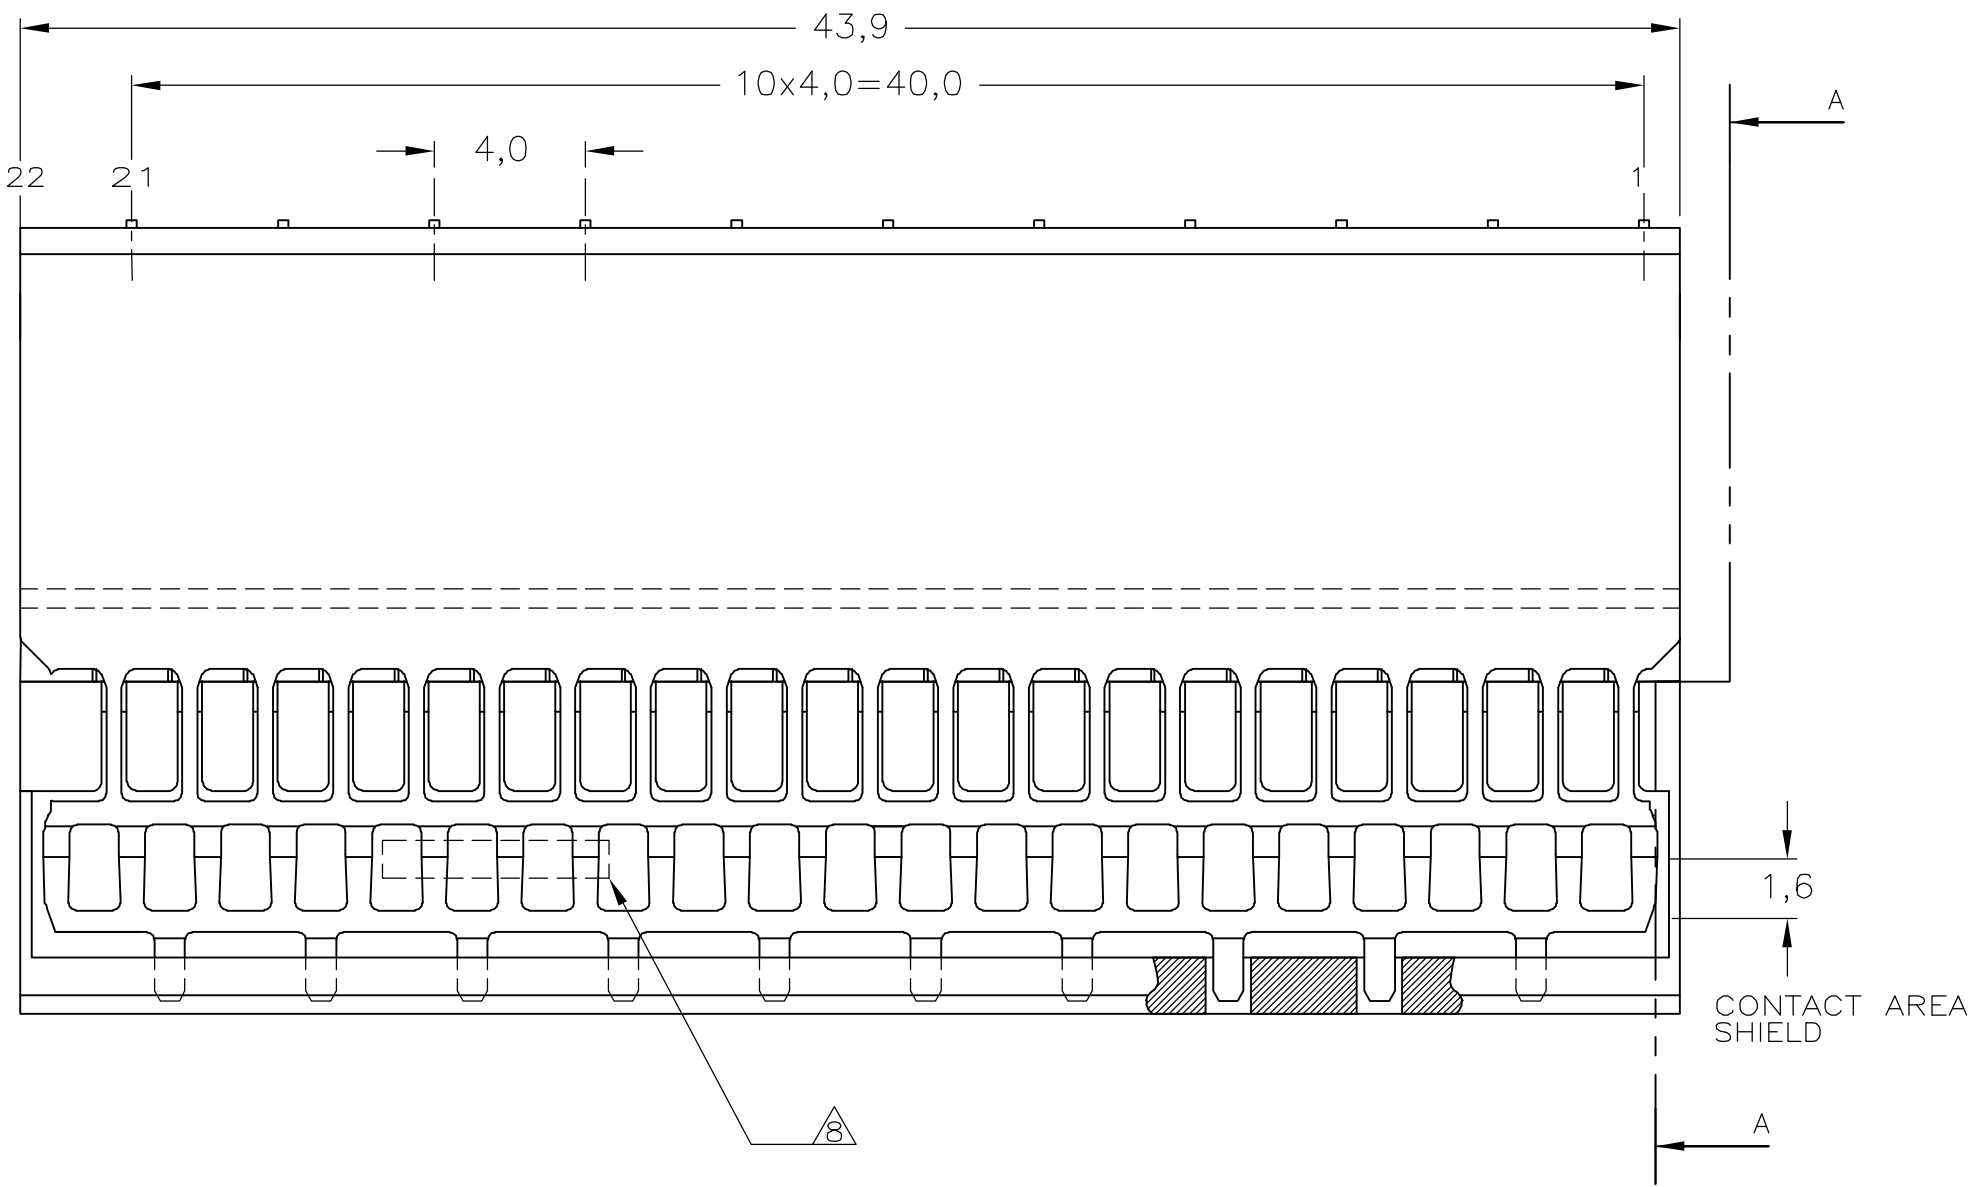

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT
SCALE 2,5:1

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

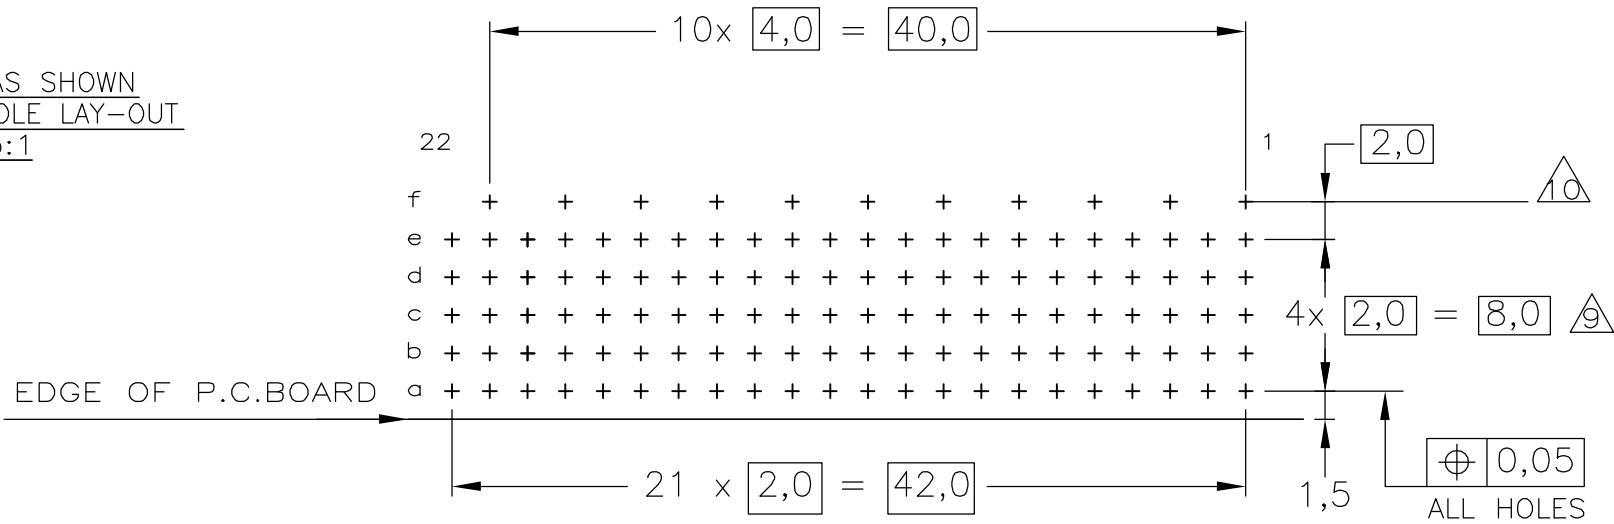

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	20AUG2004	tyco Electronics		Tyco Electronics Corporation 's-Hertogenbosch,5222AR-32	
		CHK	27OCT2004				
DIMENSIONS:		APVD	27OCT2004	NAME		Z-PACK 2mm HM	
mm		PRODUCT SPEC		TYPE B - 22 COLUMNS		PRE-SHIELDED RECEPTACLE	
		APPLICATION SPEC		SIZE		RESTRICTED TO	
		FINISH		CAGE CODE		REV	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT		DRAWING NO		SCALE	
0 PLC ± -		CUSTOMER DRAWING		00779		5:1	
1 PLC ± -				C=5352152		SHEET	
2 PLC ± -						1 OF 1	
3 PLC ± -							
4 PLC ± -							
ANGLES ± -							
FINISH							