

# Field Programmable Oscillator



## Description

SiTime offers a wide range of field programmable (FP) MEMS oscillators including simple oscillators, differential oscillators, high temperature oscillators, precision TCXO, VCXO and spread spectrum oscillators. These FP devices support the same specifications and performance as their factory-programmed counterparts.

They enable engineers to experiment with different configurations and generate customized samples in seconds for fast prototyping.

Figure 1 illustrates the simple programming setup required for programming SiTime FP devices by using the SiT6100DK, a field programming kit. Refer to SiT6100DK quick start guide and [other documents for more information](#).

For production volume, SiTime offers factory programming of its entire portfolio with the shortest lead time available in the industry.

## Applications

- Generic samples in seconds for prototype builds
- Experiment with different options for optimal timing margin
- Configure different drive strengths for best EMI and/or to drive larger loads
- Fast prototype builds

## Features

- Support for 9 MEMS oscillator families
  - [Precision Super-TCXO](#) (SiT5155, SiT5156, SiT5157, SiT5356, SiT5357)
  - [Low power](#) (SiT1602, SiT8008, SiT8009)
  - [Ultra-performance](#) (SiT8208, SiT8209)
  - [Ultra-performance differential](#) (SiT9120, SiT9121, SiT9122)
  - [High temp](#) (SiT1618, SiT8918, SiT8919, SiT8920, SiT8921)
  - [AEC-Q100 Automotive](#) (SiT2024, SiT2025, SiT8924, SiT8925)
  - [SOT23 oscillator](#) (SiT2001, SiT2002, SiT2018, SiT2019, SiT2020, SiT2021)
  - [VCXO](#) (SiT3807, SiT3808, SiT3809)
  - [Differential VCXO](#) (SiT3821, SiT3822)
  - [Spread spectrum](#) (SiT9005, SiT9003)
  - [Differential spread spectrum](#) (SiT9002)
- Wide variety of programmable options
  - Frequency from 1 – 625 MHz
  - Frequency stability from  $\pm 0.1$  ppb to  $\pm 50$  ppm
  - Supply voltages of 1.8V or 2.5 to 3.3V
  - Operating temperature up to 125°C and down to -55°C
  - Package sizes for 2.0 x 1.6 to 7.0 x 5.0 mm x mm
  - Pull ranges from  $\pm 25$  to  $\pm 1600$  ppm
  - Spread percentage from  $\pm 0.25\%$  to  $\pm 2\%$  or -0.5% to -4% (Spread spectrum only)
  - Rise/fall time from 0.25 ns to 40 ns
- Pb-free, RoHS and REACH compliant



INSTANT  
SAMPLES



SEARCH  
INVENTORY



GREEN  
SOLUTIONS



LIFETIME  
WARRANTY

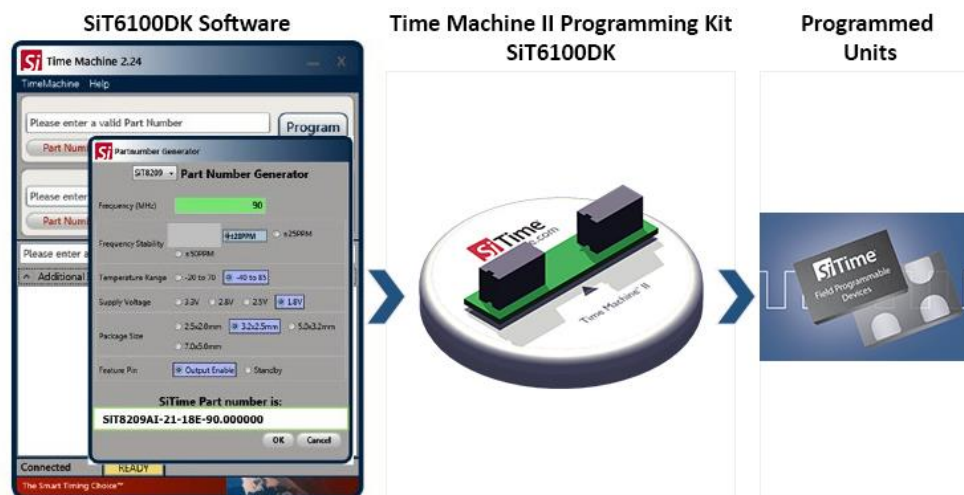


Figure 1. Field Programmable Software and Hardware

## Field Programmable Device Ordering Information

A FP device works as a superset of its programmed counterpart. In certain cases, it can also be mapped to different programmed baseproducts.

As an example, SiT8008BI-71-XXX-000.FP0000 is a field programmable device in the low power family. It comes in the 2.0 x 1.6 mm package, and can be programmed to support different combinations of the following:

- Frequency: 1 MHz to 110 MHz with 6 decimal places of accuracy
- Frequency stability:  $\pm 20$  ppm,  $\pm 25$  ppm,  $\pm 50$  ppm
- Temperature range: -20°C to 70°C, -40°C to 85°C
- Supply voltages: 1.8V or 2.5V to 3.3V
- Output drive strength: 8 different options for different rise/fall time

In addition, the SiT8008BI-11-XXX-000.FP0000 can be used for either [SiT1602](#) or [SiT8008](#) in the 2.0 x 1.6 mm x mm package. The SiT1602 and the SiT8008 share similar electrical specs and the same field programmable devices, but they support different frequencies.

Please see Supported Device column to figure out which product families can be programmed using the given FP part.

[Contact SiTime](#) for devices of your interest that are not covered here.

**Table 1. Field Programmable Devices – MEMS XO<sup>[1]</sup>**

Oscillator Product Family	Field Programmable (FP) Part Number	Supported Devices	Signaling Type	Frequency Range (MHz)	Frequency Stability (ppm)	Temp Range (°C)	Voltage (V)	Package Size (mm x mm)	Socket Card
Low Power Single-Ended Oscillator	SiT8008BI-71-XXX-000.FP0000	<a href="#">SiT1602</a> <a href="#">SiT8008</a>	LVCMOS	1 to 110	$\pm 20$ , $\pm 25$ , $\pm 50$	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	2.0 x 1.6	SiT6161DK
	SiT8008BI-11-XXX-000.FP0000							2.5 x 2.0	SiT6161DK
	SiT8008BI-21-XXX-000.FP0000							3.2 x 2.5	SiT6165DK
	SiT8008BI-31-XXX-000.FP0000							5.0 x 3.2	SiT6160DK
	SiT8008BI-81-XXX-000.FP0000							7.0 x 5.0	SiT6160DK
	SiT8009BI-71-XXX-000.FP0000	<a href="#">SiT8009</a>	LVCMOS	115 to 137	$\pm 20$ , $\pm 25$ , $\pm 50$	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	2.0 x 1.6	SiT6161DK
	SiT8009BI-11-XXX-000.FP0000							2.5 x 2.0	SiT6161DK
	SiT8009BI-21-XXX-000.FP0000							3.2 x 2.5	SiT6165DK
	SiT8009BI-31-XXX-000.FP0000							5.0 x 3.2	SiT6160DK
	SiT8009BI-81-XXX-000.FP0000							7.0 x 5.0	SiT6160DK
Ultra-Performance Single-Ended Oscillator	SiT8208AI-21-XXX-000.FP0000	<a href="#">SiT8208</a>	LVCMOS	1 to 80	$\pm 20$ , $\pm 25$ , $\pm 50$	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	3.2 x 2.5	SiT6165DK
	SiT8208AI-31-XXX-000.FP0000							5.0 x 3.2	SiT6160DK
	SiT8208AI-81-XXX-000.FP0000							7.0 x 5.0	SiT6160DK
	SiT8209AI-21-XXX-000.FP0000	<a href="#">SiT8209</a>	LVCMOS	80 to 220	$\pm 20$ , $\pm 25$ , $\pm 50$	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	3.2 x 2.5	SiT6165DK
	SiT8209AI-31-XXX-000.FP0000							5.0 x 3.2	SiT6160DK
	SiT8209AI-81-XXX-000.FP0000							7.0 x 5.0	SiT6160DK
High Performance Differential Oscillator	SiT9121AI-1B1-XXX000.FP0000	<a href="#">SiT9120</a> <a href="#">SiT9121</a>	LVPECL	1 to 220	$\pm 20$ , $\pm 25$ , $\pm 50$	-40 to 85, -20 to 70	2.5V, 3.3V	3.2 x 2.5	SiT6165DK
	SiT9121AI-1C1-XXX000.FP0000							5.0 x 3.2	SiT6160DK
	SiT9121AI-1D1-XXX000.FP0000							7.0 x 5.0	SiT6160DK
	SiT9121AI-2B1-XXX000.FP0000		LVDS	1 to 220	$\pm 20$ , $\pm 25$ , $\pm 50$	-40 to 85, -20 to 70	2.5V, 3.3V	3.2 x 2.5	SiT6165DK
	SiT9121AI-2C1-XXX000.FP0000							5.0 x 3.2	SiT6160DK
	SiT9121AI-2D1-XXX000.FP0000							7.0 x 5.0	SiT6160DK
	SiT9122AI-1B1-XXX000.FP0000	<a href="#">SiT9122</a>	LVPECL	220 to 625	$\pm 20$ , $\pm 25$ , $\pm 50$	-40 to 85, -20 to 70	2.5V, 3.3V	3.2 x 2.5	SiT6165DK
	SiT9122AI-1C1-XXX000.FP0000							5.0 x 3.2	SiT6160DK
	SiT9122AI-1D1-XXX000.FP0000							7.0 x 5.0	SiT6160DK
	SiT9122AI-2B1-XXX000.FP0000		LVDS	220 to 625	$\pm 20$ , $\pm 25$ , $\pm 50$	-40 to 85, -20 to 70	2.5V, 3.3V	3.2 x 2.5	SiT6165DK
	SiT9122AI-2C1-XXX000.FP0000							5.0 x 3.2	SiT6160DK
	SiT9122AI-2D1-XXX000.FP0000							7.0 x 5.0	SiT6160DK

**Table 1. Field Programmable Devices – MEMS XO<sup>[1]</sup> (continued)**

Oscillator Product Family	Field Programmable (FP) Part Number	Supported Devices	Signaling Type	Frequency Range (MHz)	Frequency Stability (ppm)	Temp Range (°C)	Voltage (V)	Package Size (mm x mm)	Socket Card
High Temperature Single-Ended Oscillator	SiT8920BM-71-XXX-000.FP0000	SiT1618 SiT8918 SiT8920	LVCMOS	1 to 110  Refer "Supported Frequencies" tables in SiT1618, SiT8918 and SiT8920 datasheets	±20, ±25, ±30, ±50	-40 to 105, -40 to 125, -55 to 125	1.8V, 2.5-3.3V	2.0 x 1.6	SiT6161DK
	SiT8920BM-11-XXX-000.FP0000							2.5 x 2.0	SiT6161DK
	SiT8920BM-21-XXX-000.FP0000							3.2 x 2.5	SiT6165DK
	SiT8920BM-31-XXX-000.FP0000							5.0 x 3.2	SiT6160DK
	SiT8920BM-81-XXX-000.FP0000							7.0 x 5.0	SiT6160DK
	SiT8921BM-71-XXX-000.FP0000	SiT8919 SiT8921	LVCMOS	115.194001 to 137  Refer "Supported Frequencies" tables in SiT8919 and SiT8921 datasheets	±20, ±25, ±30, ±50	-40 to 105, -40 to 125, -55 to 125	1.8V, 2.5-3.3V	2.0 x 1.6	SiT6161DK
	SiT8921BM-11-XXX-000.FP0000							2.5 x 2.0	SiT6161DK
	SiT8921BM-21-XXX-000.FP0000							3.2 x 2.5	SiT6165DK
	SiT8921BM-31-XXX-000.FP0000							5.0 x 3.2	SiT6160DK
	SiT8921BM-81-XXX-000.FP0000							7.0 x 5.0	SiT6160DK
AEC-Q100 Automotive Oscillator	SiT2024BM-S1-XXX-000.FP0000	SiT2024	LVCMOS	1 to 110  Refer "Supported Frequencies" table in SiT2024 datasheet	±20, ±25, ±30, ±50	-40 to 85, -40 to 105, -40 to 125, -55 to 125	1.8V, 2.5-3.3V	2.9 x 2.8 (SOT23-5)	SiT6165DK
	SiT2025BM-S1-XXX-000.FP0000	SiT2025	LVCMOS	115.2 to 137  Refer "Supported Frequencies" table in SiT2025 datasheet	±20, ±25, ±30, ±50	-40 to 85, -40 to 105, -40 to 125, -55 to 125	1.8V, 2.5-3.3V	2.9 x 2.8 (SOT23-5)	SiT6165DK
	SiT8924BM-71-XXX-000.FP0000	SiT8924	LVCMOS	1 to 110  Refer "Supported Frequencies" table in SiT8924 datasheet	±20, ±25, ±30, ±50	-40 to 85, -40 to 105, -40 to 125, -55 to 125	1.8V, 2.5-3.3V	2.0 x 1.6	SiT6161DK
	SiT8924BM-11-XXX-000.FP0000							2.5 x 2.0	SiT6161DK
	SiT8924BM-21-XXX-000.FP0000							3.2 x 2.5	SiT6165DK
	SiT8924BM-31-XXX-000.FP0000							5.0 x 3.2	SiT6160DK
	SiT8924BM-81-XXX-000.FP0000							7.0 x 5.0	SiT6160DK
	SiT8925BM-71-XXX-000.FP0000	SiT8925	LVCMOS	115.2 to 137  Refer "Supported Frequencies" table in SiT8925 datasheet	±20, ±25, ±30, ±50	-40 to 85, -40 to 105, -40 to 125, -55 to 125	1.8V, 2.5-3.3V	2.0 x 1.6	SiT6161DK
	SiT8925BM-11-XXX-000.FP0000							2.5 x 2.0	SiT6161DK
	SiT8925BM-21-XXX-000.FP0000							3.2 x 2.5	SiT6165DK
	SiT8925BM-31-XXX-000.FP0000							5.0 x 3.2	SiT6160DK
	SiT8925BM-81-XXX-000.FP0000							7.0 x 5.0	SiT6160DK
SoT23 Oscillator	SiT2001BI-S1-XXX-000.FP0000	SiT2001	LVCMOS	1 to 110	±20, ±25, ±50	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	2.9 x 2.8 (SOT23-5)	SiT6165DK
	SiT2002BI-S1-XXX-000.FP0000	SiT2002	LVCMOS	115 to 137	±20, ±25, ±50	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	2.9 x 2.8 (SOT23-5)	SiT6165DK
	SiT2020BM-S1-XXX-000.FP0000	SiT2018 SiT2020	LVCMOS	1 to 110  Refer "Supported Frequencies" tables in SiT2018 and SiT2020 datasheets	±20, ±25, ±30, ±50	-40 to 105, -40 to 125, -55 to 125	1.8V, 2.5-3.3V	2.9 x 2.8 (SOT23-5)	SiT6165DK
	SiT2021BM-S1-XXX-000.FP0000	SiT2019 SiT2021	LVCMOS	115.194001 to 137  Refer "Supported Frequencies" tables in SiT2019 and SiT2021 datasheets	±20, ±25, ±30, ±50	-40 to 105, -40 to 125, -55 to 125	1.8V, 2.5-3.3V	2.9 x 2.8 (SOT23-5)	SiT6165DK

**Note:**

1. Revision number which is placed right after SiTXXXX in the part number is fixed and not programmable. For instance, SiT8008A cannot be programmed to SiT8008B.

**Table 2. Field Programmable Devices – MEMS TCXO/VCTCXO<sup>[2]</sup>**

Oscillator Product Family	Field Programmable (FP) Part Number	Supported Devices	Signaling Type	Frequency Range (MHz)	Frequency Stability (ppm)	Temp Range (°C)	Voltage (V)	Pull Range (ppm)	Package Size (mm x mm)	Socket Card
Elite Precision Super-TCXO	SiT5356AE-FQ-XXXX000.FP0000	SiT5356 SiT5156 SiT5155	LVCMOS, Clipped Sinewave	1 to 60	±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 105, -40 to 85, -20 to 70	2.5, 2.8, 3.0, 3.3	±6.25	5.0 x 3.2	SiT6166DK
	SiT5356AE-FP-XXXX000.FP0000				±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 85, -20 to 70				
	SiT5356AI-FQ-XXXX000.FP0000				±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5					
	SiT5356AI-FP-XXXX000.FP0000				±0.2, ±0.25, ±0.5, ±1, ±2.5					
	SiT5357AE-FQ-XXXX000.FP0000	SiT5357 SiT5356 SiT5157 SiT5156 SiT5155		1 to 189, 200 to 220 (Clipped sinewave: 1 to 60 MHz only)	±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 105, -40 to 85, -20 to 70				
	SiT5357AE-FP-XXXX000.FP0000				±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 85, -20 to 70				
	SiT5357AI-FQ-XXXX000.FP0000				±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5					
	SiT5357AI-FP-XXXX000.FP0000				±0.2, ±0.25, ±0.5, ±1, ±2.5					
	SiT5358AN-FR-XXXX000.FP0000	SiT5358 SiT5356 SiT5156 SiT5155		1 to 60		0 to 70 (±0.05 ppm only), -40 to 105 (±0.1 ppm or less), -40 to 85 (±0.1 ppm or less), -20 to 70 (±0.1 ppm or less)				
	SiT5359AN-FR-XXXX000.FP0000	SiT5359 SiT5358 SiT5357 SiT5356 SiT5157 SiT5156 SiT5155		1 to 189, 200 to 220 (Clipped sinewave: 1 to 60 MHz only)	±0.05, ±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5					
Elite Super-TCXO	SiT5156AE-FK-XXXX000.FP0000	SiT5156 SiT5155	LVCMOS, Clipped Sinewave	1 to 60	±0.5, ±1, ±2.5	-40 to 105, -40 to 85, -20 to 70	2.5, 2.8, 3.0, 3.3	±6.25	5.0 x 3.2	SiT6166DK
	SiT5156AI-FK-XXXX000.FP0000					-40 to 85, -20 to 70				
	SiT5157AE-FK-XXXX000.FP0000	SiT5157 SiT5156 SiT5155		1 to 189, 200 to 220 (Clipped sinewave: 1 to 60 MHz only)		-40 to 105, -40 to 85, -20 to 70				
	SiT5157AI-FK-XXXX000.FP0000					-40 to 85, -20 to 70				

**Note:**

2. Revision number which is placed right after SiTXXXX in the part number is fixed and not programmable. For instance, SiT8008A cannot be programmed to SiT8008B.

**Table 3. Field Programmable Devices – MEMS DCTCXO<sup>[3]</sup>**

Oscillator Product Family	Field Programmable (FP) Part Number	Supported Devices	Signaling Type	Frequency Range (MHz)	Frequency Stability (ppm)	Temp Range (°C)	Voltage (V)	Pull Range (ppm)	Package Size (mm x mm)	Socket Card
Elite Precision Super-TCXO	SiT5356AE-FQDXXX000.FP0000	SiT5356 SiT5156 SiT5155	LVCMOS, Clipped Sinewave	1 to 60	±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 105, -40 to 85, -20 to 70	2.5, 2.8, 3.0, 3.3	±6.25 to ±3200	5.0 x 3.2	SiT6166DK
	SiT5356AE-FPDXXX000.FP0000				±0.2, ±0.25, ±0.5, ±1, ±2.5					
	SiT5356AI-FQDXXX000.FP0000				±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 85, -20 to 70				
	SiT5356AI-FPDXXX000.FP0000				±0.2, ±0.25, ±0.5, ±1, ±2.5					
	SiT5357AE-FQDXXX000.FP0000	SiT5357 SiT5356 SiT5157 SiT5156 SiT5155		1 to 189, 200 to 220 (Clipped sinewave: 1 to 60 MHz only)	±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 105, -40 to 85, -20 to 70				
	SiT5357AE-FPDXXX000.FP0000				±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 85, -20 to 70				
	SiT5357AI-FQDXXX000.FP0000				±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5	-40 to 85, -20 to 70				
	SiT5357AI-FPDXXX000.FP0000				±0.2, ±0.25, ±0.5, ±1, ±2.5					
	SiT5358AN-FRDXXX000.FP0000	SiT5358 SiT5356 SiT5156 SiT5155		1 to 60	±0.05, ±0.1, ±0.2, ±0.25, ±0.5, ±1, ±2.5	0 to 70 (±0.05 ppm only), -40 to 105 (±0.1 ppm or less), -40 to 85 (±0.1 ppm or less), -20 to 70 (±0.1 ppm or less)				
	SiT5359AN-FRDXXX000.FP0000	SiT5359 SiT5358 SiT5357 SiT5356 SiT5157 SiT5156 SiT5155		1 to 189, 200 to 220 (Clipped sinewave: 1 to 60 MHz only)						
Elite Super-TCXO	SiT5156AE-FKDXXX000.FP0000	SiT5156 SiT5155	LVCMOS, Clipped Sinewave	1 to 60	±0.5, ±1, ±2.5	-40 to 105, -40 to 85, -20 to 70	2.5, 2.8, 3.0, 3.3	±6.25 to ±320	5.0 x 3.2	SiT6166DK
	SiT5156AI-FKDXXX000.FP0000					-40 to 85, -20 to 70				
	SiT5157AE-FKDXXX000.FP0000	SiT5157 SiT5156 SiT5155		1 to 189, 200 to 220 (Clipped sinewave: 1 to 60 MHz only)		-40 to 105, -40 to 85, -20 to 70				
	SiT5157AI-FKDXXX000.FP0000					-40 to 85, -20 to 70				

**Note:**

3. Revision number which is placed right after SiTXXXX in the part number is fixed and not programmable. For instance, SiT8008A cannot be programmed to SiT8008B.

**Table 4. Field Programmable Devices – MEMS VCXO<sup>[4]</sup>**

Oscillator Product Family	Field Programmable (FP) Part Number	Supported Devices	Signaling Type	Frequency Range (MHz)	Frequency Stability (ppm)	Temp Range (°C)	Voltage (V)	Pull Range (ppm)	Package Size (mm x mm)	Socket Card
High Performance Single-Ended VCXO	SiT3808AI-22-XXXX-000.FP0000	SiT3807 SiT3808	LVCMOS	1 to 80	±25, ±50	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	±50 to ±1600	3.2 x 2.5	SiT6165DK
	SiT3808AI-32-XXXX-000.FP0000								5.0 x 3.2	SiT6160DK
	SiT3808AI-82-XXXX-000.FP0000								7.0 x 5.0	SiT6160DK
	SiT3809AI-22-XXXX-000.FP0000	SiT3809	LVCMOS	80 to 220	±25, ±50	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	±50 to ±1600	3.2 x 2.5	SiT6165DK
	SiT3809AI-32-XXXX-000.FP0000								5.0 x 3.2	SiT6160DK
	SiT3809AI-82-XXXX-000.FP0000								7.0 x 5.0	SiT6160DK
High Performance Differential VCXO	SiT3821AI-1C2-XXXX000.FP0000	SiT3821	LVPECL	1 to 220	±25, ±50	-40 to 85, -20 to 70	2.5V, 3.3V	±50 to ±1600	5.0 x 3.2	SiT6160DK
	SiT3821AI-1D2-XXXX000.FP0000								7.0 x 5.0	SiT6160DK
	SiT3821AI-2C2-XXXX000.FP0000		LVDS	1 to 220	±25, ±50	-40 to 85, -20 to 70	2.5V, 3.3V	±50 to ±1600	5.0 x 3.2	SiT6160DK
	SiT3821AI-2D2-XXXX000.FP0000								7.0 x 5.0	SiT6160DK
	SiT3822AI-1C2-XXXX000.FP0000	SiT3822	LVPECL	220 to 625	±25, ±50	-40 to 85, -20 to 70	2.5V, 3.3V	±50 to ±1600	5.0 x 3.2	SiT6160DK
	SiT3822AI-1D2-XXXX000.FP0000								7.0 x 5.0	SiT6160DK
	SiT3822AI-2C2-XXXX000.FP0000		LVDS	220 to 625	±25, ±50	-40 to 85, -20 to 70	2.5V, 3.3V	±50 to ±1600	5.0 x 3.2	SiT6160DK
	SiT3822AI-2D2-XXXX000.FP0000								7.0 x 5.0	SiT6160DK

**Note:**

- Revision number which is placed right after SiTXXXX in the part number is fixed and not programmable. For instance, SiT8008A cannot be programmed to SiT8008B.

**Table 5. Field Programmable Devices – MEMS Spread Spectrum XO<sup>[5]</sup>**

Oscillator Product Family	Field Programmable (FP) Part Number	Supported Devices	Signaling Type	Frequency Range (MHz)	Frequency Stability (ppm)	Temp Range (°C)	Voltage (V)	Spread Range (%)	Package Size (mm x mm)	Socket Card
Spread Spectrum Single-Ended Oscillator	SiT9005AI-71-XXXX000.FP0000	SiT9005	LVCMOS	1 to 141	±20, ±25, ±50	-40 to 85, -20 to 70	1.8V, 2.5-3.3V	±0.125 to ±2,	2.0 x 1.6	SiT6161DK
	Refer to <a href="#">Table 6</a> : SiT9005 FP Oscillator unsupported frequencies			-0.25 to -4				2.5 x 2.0	SiT6161DK	
	SiT9005AI-11-XXXX000.FP0000									3.2 x 2.5
Spread Spectrum Single-Ended Oscillator	SiT9003AI-33-33XX-000.FP000	SiT9003	LVCMOS	1 to 110	±50, ±100	-40 to 85, -20 to 70	2.5V, 2.8V, 3.3V	±0.25 to ±0.5,	5.0 x 3.2	SiT6160DK
	SiT9003AI-83-33XX-000.FP000							7.0 x 5.0	SiT6160DK	
	SiT9003AI-33-18XX-000.FP000						1.8V	-0.5 to -1	5.0 x 3.2	SiT6160DK
	SiT9003AI-83-18XX-000.FP000								7.0 x 5.0	SiT6160DK
Spread Spectrum Differential Oscillator	SiT9002AI-X32XXXXX000.FP000	SiT9002	LVPECL, LVDS, HCSL, CML	1 to 220	-20 to 70: ±25, ±50	-40 to 85, -20 to 70	1.8V, 2.5V, 3.3V	±0.25 to ±2,	5.0 x 3.2	SiT6160DK
	Refer to <a href="#">Table 7</a> : SiT9002 FP Oscillator unsupported frequencies			-40 to 85: ±50	-0.5 to -4			7.0 x 5.0	SiT6160DK	

**Note:**

5. Revision number which is placed right after SiTXXXX in the part number is fixed and not programmable. For instance, SiT8008A cannot be programmed to SiT8008B.

**Table 6. List of SiT9005 FP Oscillator Unsupported Frequencies**

SiT9005 FP Oscillator Unsupported Frequency Range (MHz)					
±2.06% center spread		-4.01% down spread		-4.28% center spread	
Min.	Max.	Min.	Max.	Min.	Max.
120.100000	121.100000	121.000000	121.300000	120.100000	122.300000
				122.900000	123.100000
				123.500000	124.000000
				124.900000	125.200000

**Table 7. List of SiT9002 FP Oscillator Unsupported Frequencies**

SiT9002 FP Oscillator Unsupported Frequency Range (MHz)							
±0.25% center spread		±0.5% center spread		±1.0% center spread		±2.0% center spread	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1.04200	1.07000	1.04000	1.07400	1.03600	1.07800	1.02600	1.09000
1.19200	1.22400	1.19000	1.22600	1.18400	1.23400	1.17200	1.24600
1.39000	1.42800	1.38800	1.43200	1.38000	1.43800	1.36800	1.45400
2.08600	2.14200	2.08200	2.14600	1.65600	1.66600	1.64000	1.68200
4.17000	4.28000	2.84200	2.84600	2.07000	2.15800	1.86800	1.87000
8.35000	8.57000	2.85000	2.86200	2.83000	2.87800	2.05000	2.17800
16.69000	17.13000	4.16000	4.29000	4.14000	4.31000	2.46200	2.49000
33.40000	34.25000	5.70000	5.73000	5.66000	5.75000	2.80200	2.90600
66.81000	68.51000	8.33000	8.59000	8.28000	8.63000	4.10000	4.36000
133.61000	137.11000	11.37000	11.45000	11.31000	11.51000	4.92000	4.98000
160.31000	164.61000	16.65000	17.19000	16.57000	17.27000	5.60000	5.81000
200.41000	205.71000	22.85000	22.90000	22.65000	23.00000	7.47000	7.48000
		33.30000	34.35000	33.15000	34.55000	8.20000	8.72000
		45.50000	45.55000	45.30000	46.05000	9.85000	9.97000
		45.60000	45.65000	66.31000	69.11000	11.21000	11.63000
		45.70000	45.80000	90.51000	92.11000	16.41000	17.45000
		66.61000	68.71000	132.61000	138.21000	19.69000	19.93000
		91.01000	91.11000	159.11000	165.81000	32.80000	34.90000
		91.21000	91.31000	181.21000	186.61000	39.40000	39.85000
		91.41000	91.61000	198.91000	207.31000	44.85000	46.50000
		133.21000	137.51000			65.61000	69.81000
		159.91000	165.01000			78.71000	79.71000
		182.11000	182.21000			89.71000	93.01000
		182.41000	182.71000			131.31000	139.61000
		182.81000	183.71000			157.61000	167.51000
		184.01000	184.21000			179.41000	188.51000
		185.11000	185.21000			197.01000	209.41000
		199.91000	206.21000				



**Table 7. List of SiT9002 FP Oscillator Unsupported Frequencies (continued)**

SiT9002 FP Oscillator Unsupported Frequency Range (MHz)							
-0.5% down spread		-1.0% down spread		-2.0% down spread		-4.0% down spread	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1.04461	1.07268	1.04520	1.07937	1.04636	1.08878	1.04652	1.11180
1.19498	1.22706	1.19595	1.23213	1.19584	1.24634	1.19544	1.27092
1.39348	1.43157	1.39494	1.43916	1.39380	1.45238	1.39536	1.48308
2.09122	2.14736	2.09241	2.15673	1.67256	1.68266	1.67280	1.71564
4.18043	4.29070	2.85621	2.86023	2.09070	2.17958	1.90536	1.90740
8.37088	8.59143	2.86425	2.87631	2.85830	2.90678	2.09100	2.22156
16.73173	17.17283	4.18080	4.31145	4.18140	4.35310	2.51124	2.53980
33.48350	34.33563	5.72850	5.75865	5.71660	5.80750	2.85804	2.96412
66.97703	68.68128	8.37165	8.63295	8.36280	8.71630	4.18200	4.44720
133.94403	137.45278	11.42685	11.50725	11.42310	11.62510	5.01840	5.07960
160.71078	165.02153	16.73325	17.27595	16.73570	17.44270	5.71200	5.92620
200.91103	206.22428	22.96425	23.01450	22.87650	23.23000	7.61940	7.62960
		33.46650	34.52175	33.48150	34.89550	8.36400	8.89440
		45.72750	45.77775	45.75300	46.51050	10.04700	10.16940
		45.82800	45.87825	66.97310	69.80110	11.43420	11.86260
		45.92850	46.02900	91.41510	93.03110	16.73820	17.79900
		66.94305	69.05355	133.93610	139.59210	20.08380	20.32860
		91.46505	91.56555	160.70110	167.46810	33.45600	35.59800
		91.66605	91.76655	183.02210	188.47610	40.18800	40.64700
		91.86705	92.06805	200.89910	209.38310	45.74700	47.43000
		133.87605	138.19755			66.92220	71.20620
		160.70955	165.83505			80.28420	81.30420
		183.02055	183.12105			91.50420	94.87020
		183.32205	183.62355			133.93620	142.40220
		183.72405	184.62855			160.76220	170.86020
		184.93005	185.13105			182.99820	192.28020
		186.03555	186.13605			200.95020	213.59820
		200.90955	207.24105				

## Tape & Reel Options

FP devices are shipped with standard Tape & Reel options. An additional letter is affixed to the end of the FP device part numbers in Tables 8 to 10 to specify the tape size and the reel quantity.

For example, the last letter “G” in the SiT8008AI-71-XXX-000.FP0000G indicates 250 pieces of SiT8008AI FP devices shipped in 8 mm tape.

The complete list of T&R options for different device package sizes are shown in tables below.

**Table 8. Ordering Codes for Supported Tape & Reel Packing Method**

Supported FP Device: [SiT8008](#), [SiT8009](#), [SiT8920](#), [SiT8921](#), [SiT8924](#), [SiT8925](#), [SiT9005](#)

Tape & Reel	8 mm Tape		12 mm Tape		16 mm Tape	
Package Size (mm x mm)	250 pcs reel	1ku reel	250 pcs reel	1ku reel	250 pcs reel	1ku reel
2.0 x 1.6	G	E	–	–	–	–
2.5 x 2.0	G	E	–	–	–	–
3.2 x 2.5	G	E	–	–	–	–
5.0 x 3.2	–	–	X	Y	–	–
7.0 x 5.0	–	–	–	–	X	Y

**Table 9. Ordering Codes for Supported Tape & Reel Packing Method**

Supported FP Device: [SiT3808](#), [SiT3809](#), [SiT3821](#), [SiT3822](#), [SiT5156](#), [SiT5157](#), [SiT5356](#), [SiT5357](#), [SiT5358](#), [SiT5359](#), [SiT8208](#), [SiT8209](#), [SiT9002](#), [SiT9003](#), [SiT9121](#), [SiT9122](#)

Tape & Reel	12 mm Tape		16 mm Tape	
Package Size (mm x mm)	250 pcs reel	1ku reel	250 pcs reel	1ku reel
2.5 x 2.0	X	Y	–	–
3.2 x 2.5	X	Y	–	–
5.0 x 3.2	X	Y	–	–
7.0 x 5.0	–	–	X	Y

**Table 10. Ordering Codes for Supported Tape & Reel Packing Method**

Supported FP Device: [SiT2024](#), [SiT2025](#), [SiT9201](#), [SiT2001](#), [SiT2002](#), [SiT2020](#), [SiT2021](#)

Tape & Reel	8mm Tape	
Package Size (mm x mm)	250 pcs reel	1ku reel
2.9 x 2.8	G	E

## Time Machine II Programmer Kit

FP devices are programmed with SiTime's oscillator programmer. Time Machine II is a complete programming kit. It comes with the programmer base unit and three socket cards, each of which accommodates two different oscillator package sizes. The ordering codes for the programming kit and the socket cards are shown in the table below.

Note that earlier versions of the programming kit was shipped with the SiT6162DK socket card that accommodates 2.7 x 2.4 mm x mm (2.5 x 2.0 compatible) and 3.2 x 2.5 mm x mm 4-pin packages. The SiT6162DK has since been replaced with SiT6165DK, which supports the 2.9 x 2.8 mm x mm (SOT23-5) packages in addition to 3.2 x 2.5 mm x mm packages.

**Table 11. Programmer Kit Description and Ordering Codes**

Device Name	Part Number	Description
Programming Kit	SiT6100DK	The complete kit that includes the programmer base (SiT61650DK) and three socket cards (SiT6160DK, SiT6161 and SiT6165)
Programmer Base	SiT6150DK	The base programmer with no sockets
Programming Socket	SiT6160DK	5.0x3.2 and 7.0x5.0 packages programming sockets to program all 6-in and 4-pin field programmable devices
Programming Socket	SiT6161DK	2.0x1.6 and 2.5x2.0 packages programming sockets to program all 6-in and 4-pin field programmable devices
Programming Socket	SiT6165DK	3.2x2.5 package programming sockets to program all 6-in and 4-pin field programmable devices. 2.9x2.8 (SOT23-5) package supports 5-pin field programmable devices
Programming Socket	SiT6166DK	5.0x3.2 10-pin packages programming sockets

## Socket Card Selection for Programming

Each socket card for the Time Machine II programmer comes with two sockets, each of which accommodates a particular package size. In addition, some sockets are designed to work with 4-pin devices only whereas other sockets can accommodate both 4-pin and 6-pin devices.

Table 12 shows how to select the proper socket card for the desired FP device package size. Note that the package sizes are also printed right next to the sockets on the socket cards for visual identification during device programming.

**Table 12. Supported Packages**

Package Size	2.0 x 1.6 (4-pin)	2.5 x 2.0 (4-pin)	2.9 x 2.8 (5-pin)	3.2 x 2.5 (4-pin & 6-pin)	5.0 x 3.2 (4-pin & 6-pin)	7.0 x 5.0 (4-pin & 6-pin)	5.0 x 3.2 (10-pin)
Socket to use	SiT6161DK		SiT6165DK		SiT6160DK		SiT6166DK
Supported Field Programmable Devices	SiT8008 SiT8009 SiT8920 SiT8921 SiT8924 SiT8925 SiT9005	SiT8008 SiT8009 SiT8920 SiT8921 SiT8924 SiT8925 SiT9003 SiT9005	SiT2024 SiT2025 SiT9201 SiT2001 SiT2002 SiT2020 SiT2021	SiT8008 SiT8009 SiT8208 SiT8209 SiT8920 SiT8921 SiT8924 SiT8925 SiT3808 SiT3809 SiT9121 SiT9122 SiT9003 SiT9005	SiT8008 SiT8009 SiT8208 SiT8209 SiT8920 SiT8921 SiT8924 SiT8925 SiT3808 SiT3809 SiT9121 SiT9122 SiT3821 SiT3822 SiT9002 SiT9003	SiT8008 SiT8009 SiT8208 SiT8209 SiT8920 SiT8921 SiT8924 SiT8925 SiT3808 SiT3809 SiT9121 SiT9122 SiT3821 SiT3822 SiT9002 SiT9003	SiT5156 SiT5157 SiT5356 SiT5357 SiT5358 SiT5359

**Table 13. Revision History**

Revision	Release Date	Change Summary
0.8	04/01/2013	First release
1.0	02/27/2014	Added more field programmer devices Updated Time Machine Socket Card information Formatted enhancement
1.01	03/12/2014	Corrected the ordering code for High Temperature, Single-Ended devices
1.1	03/30/2015	Updated revision from A to B for SiT8008/8009/8920/8921 Corrected frequency stability of SiT9002
1.2	07/21/2015	Added supports for AEC-Q100 automotive products; SiT2024, SiT2025, SiT8924, SiT8925 Added supports for clock generators products; SiT9201, 2001, 2002, SiT2018, SiT2019, SiT2020, SiT2021 Corrected frequency range and frequency stability of the high temperature products (SiT8920/SiT8921) in Table.1 Updated the part number of the program kits in Table.6
1.3	09/15/2015	Added $\pm 25$ ppm frequency stability option to AEC-Q100 family Revised spread percentage of SiT9001 Added 2.8 V voltage option to SiT9003
1.4	03/14/2016	Corrected and added one more "0" at the end of all part numbers except for SiT900x"
1.5	02/01/2018	Added SiT9005 Added SiT9002 unsupported frequencies list Took out 2520 and 3225 package options from SiT9003 Took out 2520 package option from SiT8208, SiT8209, SiT3807 and SiT3808 Took out SiT9001 Updated logo and company address, other page layout changes
1.6	07/05/2019	Added SiT5155, SiT5156, SiT5157, SiT5356, SiT5357 Added SiT6166DK Corrected SiT8208, SiT8209, SiT3808 and SiT3809 part numbers Corrected SiT3808, SiT3808, SiT3821, SiT3822 pull range options

**SiTime Corporation**, 5451 Patrick Henry Drive, Santa Clara, CA 95054, USA | **Phone:** +1-408-328-4400 | **Fax:** +1-408-328-4439

© SiTime Corporation 2013-2019. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

**Disclaimer:** SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any SiTime product and any product documentation. Products sold by SiTime are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. All sales are made conditioned upon compliance with the critical uses policy set forth below.

#### CRITICAL USE EXCLUSION POLICY

BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.