



FCC SDOC TEST REPORT

Report No: CTSL2620330088ER

Product Name: Handheld garment steamer

Main Test Model: HY-GTJ2026

Applicant: Wenzhou Hongye Health Technology Co., Ltd

EXECUTIVE SUMMARY

A sample of this product was tested and found to be in compliance with CFR 47 FCC Part 15 Subpart B: 2023 Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from CTSL; All Test Data Presented in this report is only applicable to presented Test sample.

CTSL Testing (Dongguan) Co., Ltd.
Room 112, Building 1, No. 15, Jiaoyuansongshan, Hetian Village,
Houjie Town, Dongguan, Guangdong China

Test Report of FCC

Product name	Handheld garment steamer				
Main Test Model	HY-GTJ2026				
Series Models	/				
Ratings	Input 110-220V, 50-60Hz, 1000W				
Trade Mark	/				
Applicant	Name	Wenzhou Hongye Health Technology Co., Ltd			
	Address	No. 254 Zhangge Village, Wanquan Town, Pingyang County, Wenzhou City, Zhejiang Province, China			
Manufacturer	Name	Wenzhou Hongye Health Technology Co., Ltd			
	Address	No. 254 Zhangge Village, Wanquan Town, Pingyang County, Wenzhou City, Zhejiang Province, China			
Standard	CFR 47 FCC Part 15 Subpart B: 2023 IEEE ANSI C63.4-2014				
Test Location	ISO/IEC 17025 by ILAC-MRA is A2LA 7556.01 CTSL Testing (Dongguan) Co., Ltd. Room 112, Building 1, No. 15, Jiaoyuansongshan, Hetian Village, Houjie Town, Dongguan, Guangdong China				
Receipt Date	2026.03.03	Test period	2026.03.04-2026.03.09	Issue Date	2026.03.10
Conclusion	The equipment under test was found to be compliance with the requirements of the standards applied.				
Performs Testing:	Ethan Zhao	(Special seal)			
Test Report Reviewer:	Steve Qin				
Test Report Authorizer:	Alan Li				

Contents

Contents	3
1.Brief Summary of Results	4
2.General Information	5
2.1 Product Information	5
2.2 Test Configuration	6
2.3 Modes of Operation	6
2.4 Block Diagram Showing The Configuration of System Tested	7
2.5 Tested Supporting System Details	7
2.6 Test Location	8
3.Test Instrument Information	9
3.1Instrument List	9
4.Measurement Uncertainty	10
5. Conducted Emissions	11
5.1 Specification Reference	11
5.2 Environmental Conditions	11
5.3 Limits	11
5.4 Test Setup & Test Method	12
5.5 Conducted Disturbance at Mains Terminals Test Results	12
5.6 Test Data	13
6.Radiated Emissions	15
6.1 Specification Reference	15
6.2 Environmental Conditions	15
6.3 Limits	15
6.4 Test Setup & Test Method	16
6.5 Radiated Emissions Test Results	16
6.6 Test Data	17
7. Photographs - Test Setup	19
8. Photographs - Constructional Details	21

1.Brief Summary of Results

A brief summary of the tests carried out in accordance with:

CFR 47 FCC Part 15 Subpart B: 2023 / IEEE ANSI C63.4-2014

Test Items	Test Standard& Requirement	Limits	Result
Conducted Emission	CFR 47 FCC Part 15 Subpart B: 2023 / IEEE ANSI C63.4-2014	Class B	Pass
Radiated Emission	CFR 47 FCC Part 15 Subpart B: 2023 / IEEE ANSI C63.4-2014	Class B	Pass
Note: N/A is an abbreviation for Not Applicable.			



2.General Information

The information contained in this report is intended to show verification of the EMC Qualification Approval Testing of the requirements of the standards for the tests listed in Section 1.

2.1 Product Information

2.1.1 General Description of EUT (Equipment Under Test)

Product Name : Handheld garment steamer

Models : HY-GTJ2026

Listed Models : /

Ratings : Input 110-220V, 50-60Hz, 1000W



2.2 Test Configuration

Test samples	Configuration	Description
HY-GTJ2026	AC Powered	AC 120V/60Hz

2.3 Modes of Operation

Pretest Mode	Description
Mode	Max Power; Mid Power; Min Power

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


The EUT system operated these modes were found to be the worst case during the pre-scanning test as Following:

The worst Test Mode	Description
Mode 1	Max Power
Remark: The worst case is listed on this report.	

2.4 Block Diagram Showing The Configuration of System Tested

EUT: Handheld garment steamer

EMI:



Highest internal frequency : <108MHz

EUT type : ☒ Table top ☐ Floor standing

2.5 Tested Supporting System Details

No.	Description	Equipment No.	Manufacturer	Model	Serial Number
1.	/	/	N/A	/	N/A



2.6 Test Location

Test Site 1:

Company name: CTSL Testing (Dongguan) Co., Ltd.

Address: Room 112, Building 1, No. 15, Jiaoyuansongshan Hetian Village, Houjie Town Dongguan City, Guangdong, People's Republic of China City, Guangdong, China

A2LA Certificate Number: 7556.01

CTSL Testing (Dongguan) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

FCC-Registration No.: 0037614732; Test Firm Registration Number:750639;

CTSL Testing (Dongguan) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 34801 CAB identifier: CN0192

CTSL Testing (Dongguan) Co., Ltd. The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

Test Name	Test Site
Conducted Emission at The Main Terminals Test	1
Radiated Emissions Test(30-1000MHz)	1

3. Test Instrument Information

3.1 Instrument List

Equipment for conduction emission test

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date & Expired Date
Receiver	R&S	ESCI3	AT005	2025/6/12~2026/6/11
LISN	R&S	ENV216	AT006	2025/7/24~2026/7/23
Pulse limiter	Schwarzbeck	VTSD 9561 F-N	AT007	2024/7/10~2026/7/09
Test Software	FARAD	EZ-EMC Ver.3A1.1+	N/A	N/A

From 9 kHz to 150 kHz: $y(\text{dBuV}) \pm U = y(\text{dBuV}) \pm 3.16 \text{ dB}$ ($k = 2$, confidence level 95%)

From 150 kHz to 30 MHz: $y(\text{dBuV}) \pm U = y(\text{dBuV}) \pm 2.74 \text{ dB}$ ($k = 2$, confidence level 95%)

Equipment for Radiation emission test

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date & Expired Date
Receiver	R&S	ESCI7	AT001	2025/6/12~2026/6/11
Trilog-boardband antenna	Schwarzbeck	VULB 9168	AT002	2025/7/12~2026/7/11
Double Ridge Horn Antenna 1GHz-18GHz	Schwarzbeck	BBHA 9120 D	AT003	2024/11/13~2026/11/12
Broadband Preamplifier 0.5-18GHz	Schwarzbeck	BBV 9718 D	AT004	2024/7/10~2026/7/9
Test Software	FARAD	EZ-EMC Ver.3A1.1+	N/A	N/A

Expanded uncertainty: $\pm U = 4.32 \text{ dB}$ $k = 2$, Confidence level 95%

4.Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

System Measurement Uncertainty	
Test Item	Uncertainty
Uncertainty for Conduction emission test in shielding room	2.5dB(150kHz to 30MHz)
Uncertainty for Radiation emission test in shielding room	4.24dB (30MHz~1000MHz)

ong
SL
ove

5. Conducted Emissions

5.1 Specification Reference

CFR 47 FCC Part 15 Subpart B: 2023 / IEEE ANSI C63.4-2014

5.2 Environmental Conditions

Test date	Ambient temperature	Relative humidity	Atmospheric pressure
Mar.09, 2026	23°C	59%	101.5kPa

5.3 Limits

Limits for conducted emission of class A device


Frequency(MHz)	Maximum RF Line Voltage (dBμV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60
Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

Limits for conducted emission of class B device

Frequency(MHz)	Maximum RF Line Voltage (dBμV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50
Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz 2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

5.4 Test Setup & Test Method

Conducted Emissions

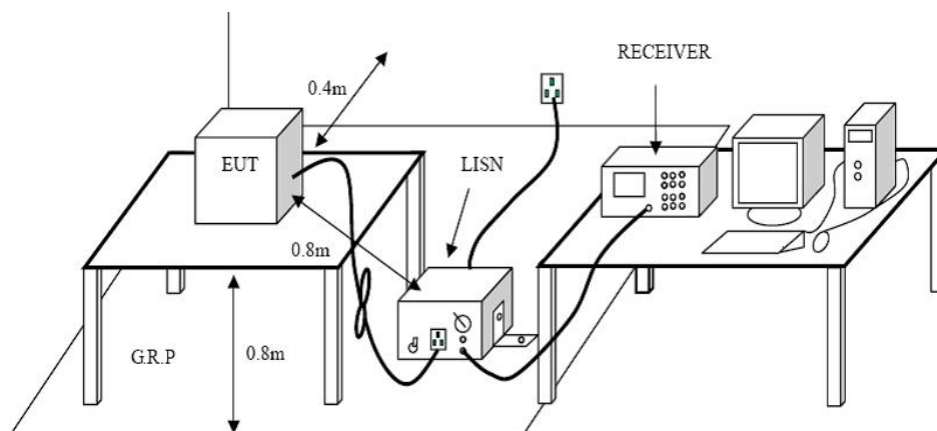

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

The cables shall be insulated (by up to 15 cm) from the horizontal ground reference plane, and shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

(This test method references IEEE ANSI C63.4-2014)

5.5 Conducted Disturbance at Mains Terminals Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

5.6 Test Data

EUT: Handheld garment steamer

M/N: HY-GTJ2026

Test Voltage: AC 120V/60Hz

Phase: Live

Test Mode: Max Power

Note:

Detailed results are shown below



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.178	49.76	20.84	70.60	79.00	-8.40	QP	P
2 *	0.178	40.41	20.84	61.25	66.00	-4.75	AVG	P
3	0.238	40.59	20.84	61.43	79.00	-17.57	QP	P
4	0.238	30.54	20.84	51.38	66.00	-14.62	AVG	P
5	0.294	37.95	20.82	58.77	79.00	-20.23	QP	P
6	0.294	22.49	20.82	43.31	66.00	-22.69	AVG	P
7	0.358	34.63	20.82	55.45	79.00	-23.55	QP	P
8	0.358	20.96	20.82	41.78	66.00	-24.22	AVG	P
9	0.502	25.76	20.82	46.58	73.00	-26.42	QP	P
10	0.502	11.17	20.82	31.99	60.00	-28.01	AVG	P
11	3.734	24.60	21.07	45.67	73.00	-27.33	QP	P
12	3.734	21.80	21.07	42.87	60.00	-17.13	AVG	P

Remark: The test Result=Reading+ Lisn+ Cab L.

If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

EUT: Handheld garment steamer

M/N: HY-GTJ2026

Test Voltage: AC 120V/60Hz

Phase: Neutral

Test Mode: Max Power

Note:

Detailed results are shown below



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.178	45.80	20.67	66.47	79.00	-12.53	QP	P
2 *	0.178	36.89	20.67	57.56	66.00	-8.44	AVG	P
3	0.234	40.09	20.66	60.75	79.00	-18.25	QP	P
4	0.234	25.64	20.66	46.30	66.00	-19.70	AVG	P
5	0.298	33.91	20.66	54.57	79.00	-24.43	QP	P
6	0.298	24.74	20.66	45.40	66.00	-20.60	AVG	P
7	0.358	32.66	20.66	53.32	79.00	-25.68	QP	P
8	0.358	21.47	20.66	42.13	66.00	-23.87	AVG	P
9	0.650	24.67	20.66	45.33	73.00	-27.67	QP	P
10	0.650	20.45	20.66	41.11	60.00	-18.89	AVG	P
11	3.898	25.96	20.89	46.85	73.00	-26.15	QP	P
12	3.898	21.52	20.89	42.41	60.00	-17.59	AVG	P

Remark: The test Result=Reading+ Lisn+ Cab L.

If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

6. Radiated Emissions

6.1 Specification Reference

CFR 47 FCC Part 15 Subpart B: 2023 / IEEE ANSI C63.4-2014

6.2 Environmental Conditions

Test date	Ambient temperature	Relative humidity	Atmospheric pressure
Mar.09, 2026	25°C	54%	101.5kPa

6.3 Limits

Limits for radiated emission of class A device


Frequency Range (MHz)	Permitted limit in dBV/m (Quasi-peak) of Measurement Distance 10m
30 ~ 88	39.0
88 ~ 216	43.5
216~960	46.4
Above 960	49.5
Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.	

Limits for radiated emission of class B device

Frequency Range (MHz)	Permitted limit in dBV/m (Quasi-peak) of Measurement Distance 3m
30 ~ 88	40.0
88 ~ 216	43.5
216~960	46.0
Above 960	54.0
Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.	

6.4 Test Setup & Test Method

Radiated emission of Distance 3m

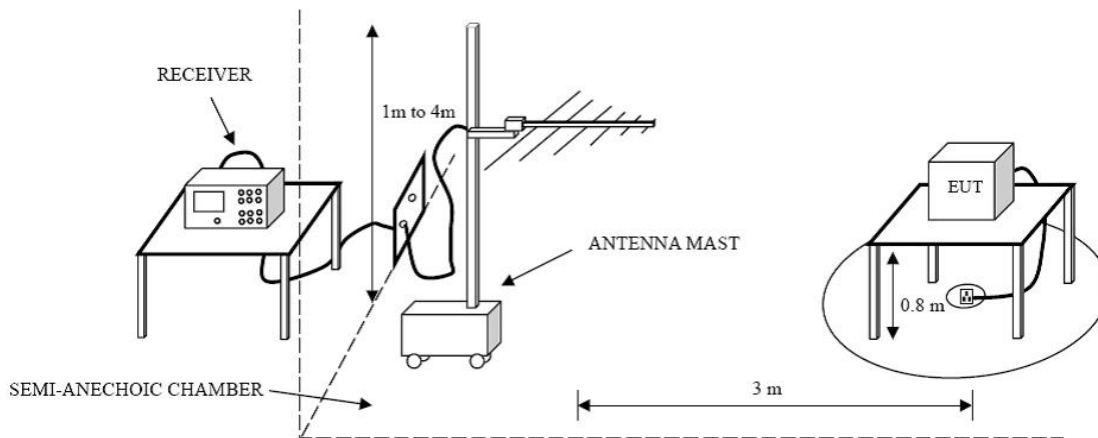

The measurement was performed in a semi-anechoic chamber.

The EUT was placed on the top of a rotating table which is 0.8 meters above the ground. EUT is set 3.0 meters away from the receiving antenna that mounted on a antenna tower. The table was rotated 360 degrees to determine the position of the highest radiation, the antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30MHz to 1000MHz. If the Peak Mode measured value compliance with and lower than quasi-peak mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

Measurement was performed according to FCC Part 15B

The bandwidth setting on R&S Test Receiver was 120 kHz.


The required measurement frequency range was checked.

6.5 Radiated Emissions Test Results

Pass. (All emissions not reported below are too low against the prescribed limits.)

6.6 Test Data

EUT: Handheld garment steamer
M/N: HY-GTJ2026
Test Voltage: AC 120V/60Hz
Ant. Pol.: Vertical
Test Mode: Max Power
Note:
Detailed results are shown below

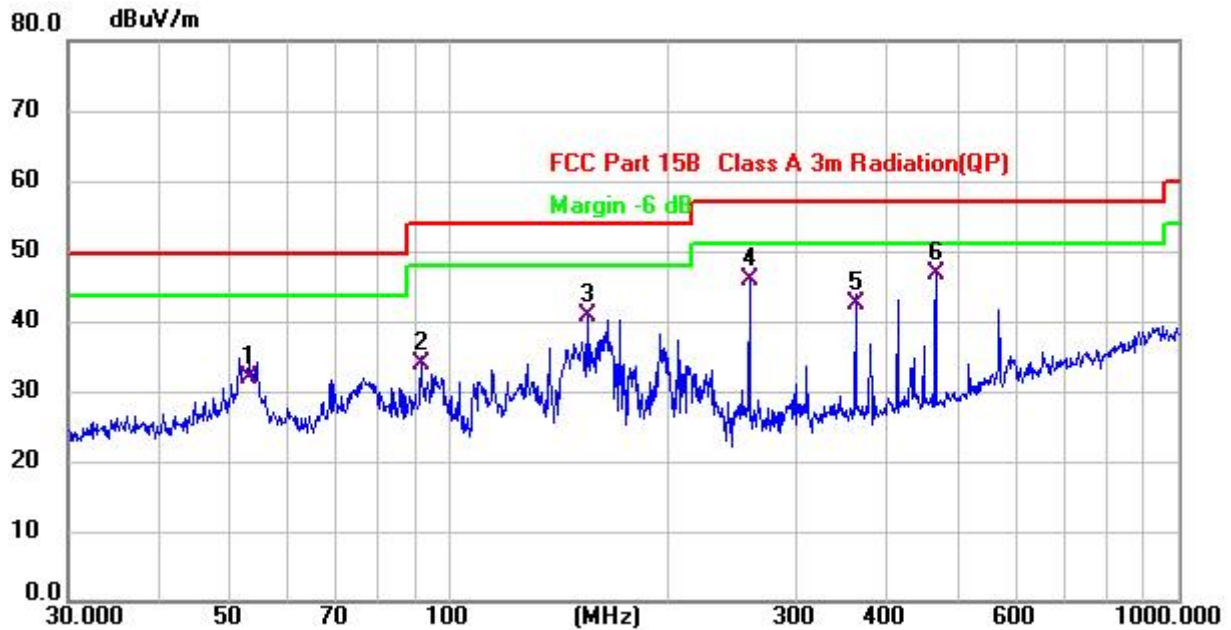


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	53.131	12.06	19.72	31.78	49.50	-17.72	QP	P
2	91.495	18.22	15.67	33.89	53.90	-20.01	QP	P
3	154.821	20.43	20.23	40.66	53.90	-13.24	QP	P
4	258.326	27.19	18.59	45.78	56.90	-11.12	QP	P
5	361.714	20.48	22.03	42.51	56.90	-14.39	QP	P
6 *	465.599	23.18	23.42	46.60	56.90	-10.30	QP	P

Remarks:1. The test Result (Over) = Limit – Reading + Factor.

2. If Peak Result complies with QP Limit, QP Result is deemed to comply with QP Limit.

EUT: Handheld garment steamer
M/N: HY-GTJ2026
Test Voltage: AC 120V/60Hz
Ant. Pol.: Horizontal
Test Mode: Max Power
Note:
Detailed results are shown below

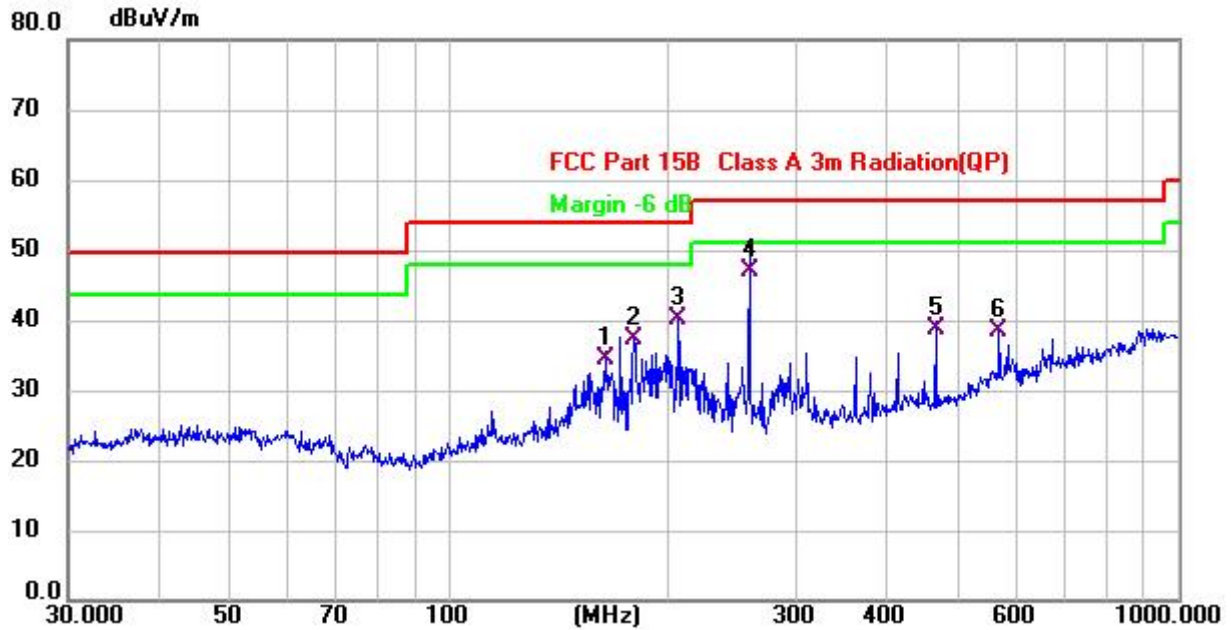

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	163.755	13.99	20.47	34.46	53.90	-19.44	QP	P
2	179.386	19.16	18.00	37.16	53.90	-16.74	QP	P
3	206.398	22.90	17.16	40.06	53.90	-13.84	QP	P
4 *	258.326	28.46	18.59	47.05	56.90	-9.85	QP	P
5	465.599	15.32	23.42	38.74	56.90	-18.16	QP	P
6	568.613	12.29	26.05	38.34	56.90	-18.56	QP	P

Remarks:1. The test Result (Over) = Limit – Reading + Factor.
2. If Peak Result complies with QP Limit, QP Result is deemed to comply with QP Limit.

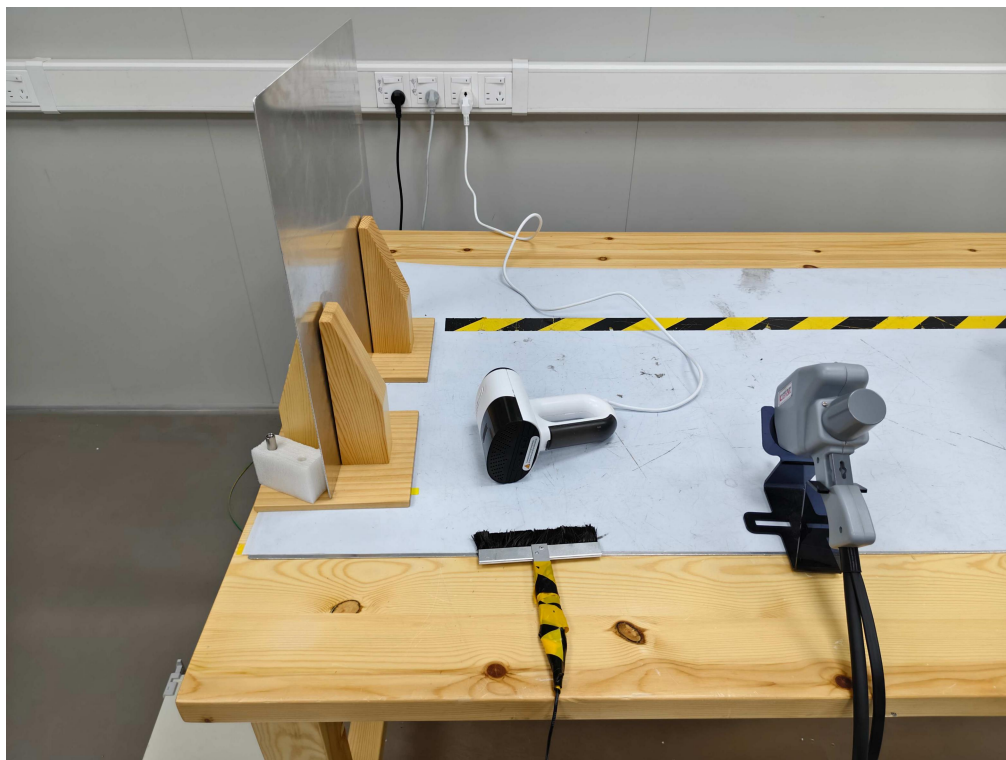
7. Photographs - Test Setup

Photo 1 Radiated Measurement Photo



Photo 2 Conducted Measurement Photo



Photo 3 ESD Measurement Photo

8. Photographs - Constructional Details

Photo 1 External photos of EUT

Main Test Model: HY-GTJ2026



Photo 2 External photos of EUT

Main Test Model: HY-GTJ2026



Photo 3 External photos of EUT



Photo 4 External photos of EUT



Photo 5 External photos of EUT



Photo 6 Inside View of EUT

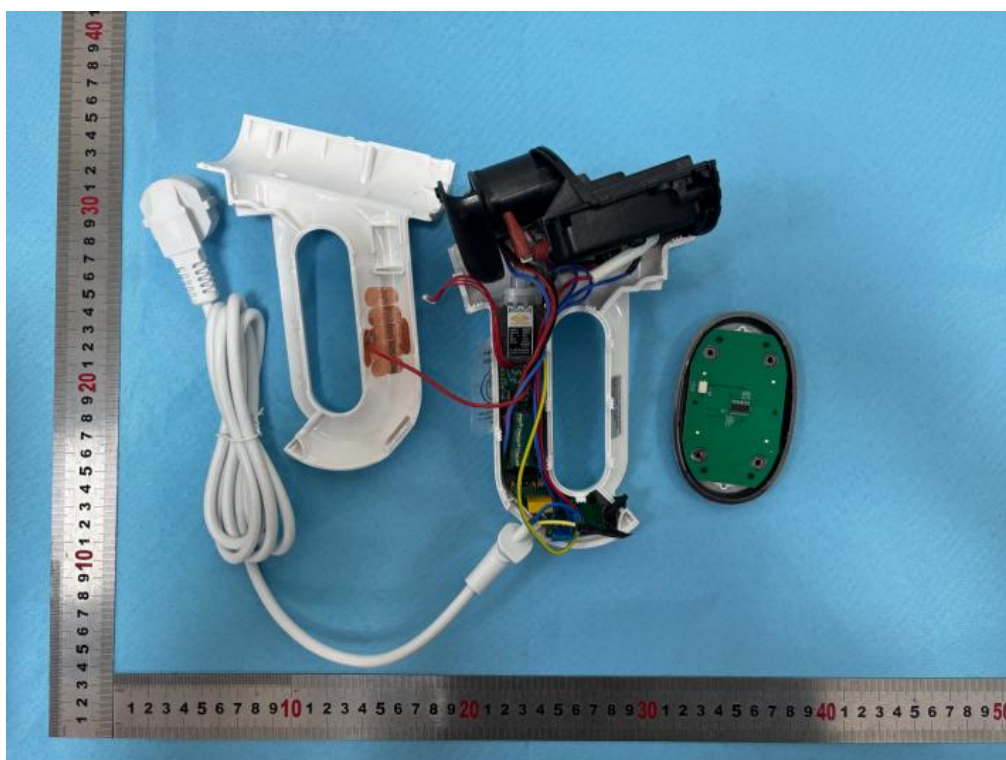


Photo 7 PCB View of EUT

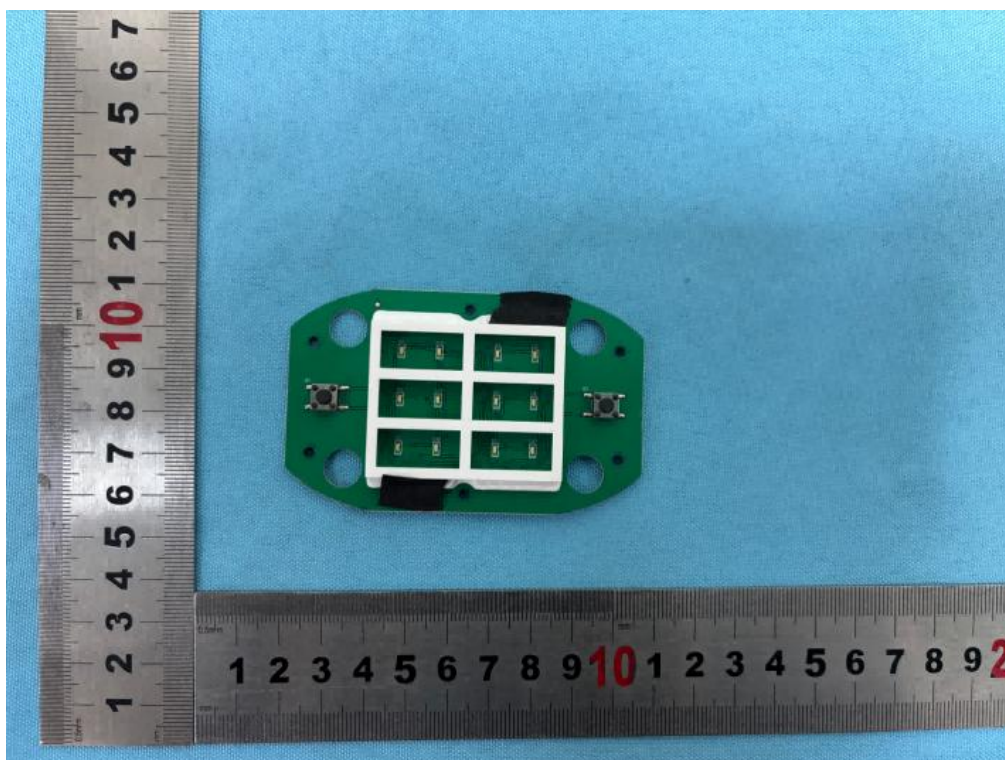


Photo 8 PCB View of EUT

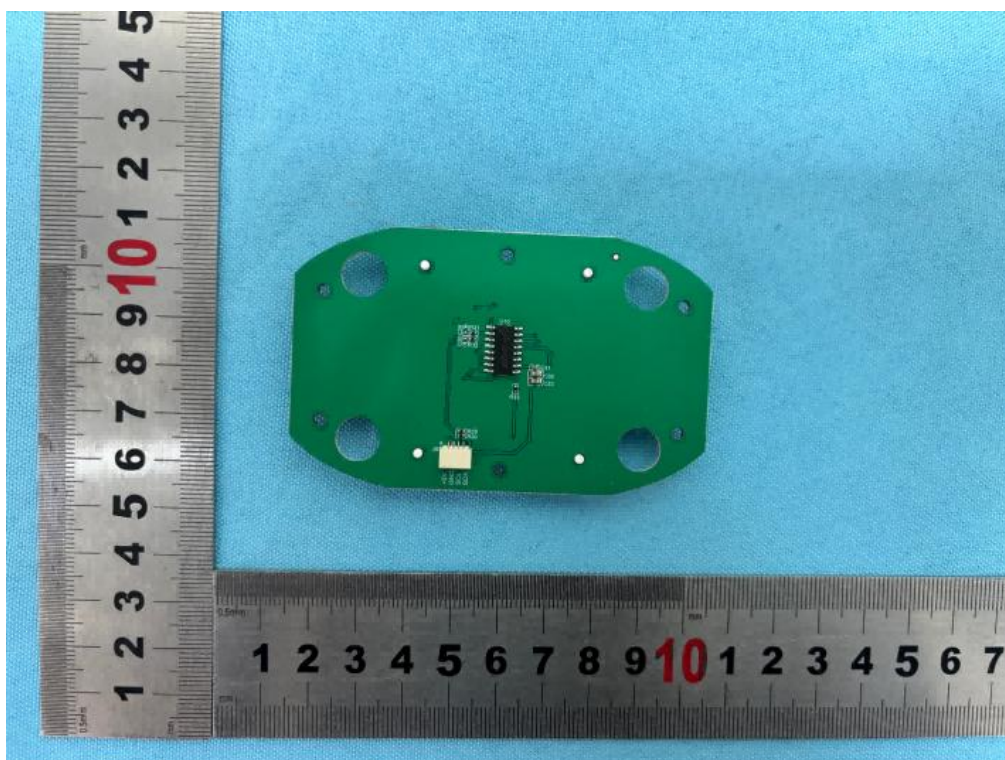


Photo 9 PCB View of EUT


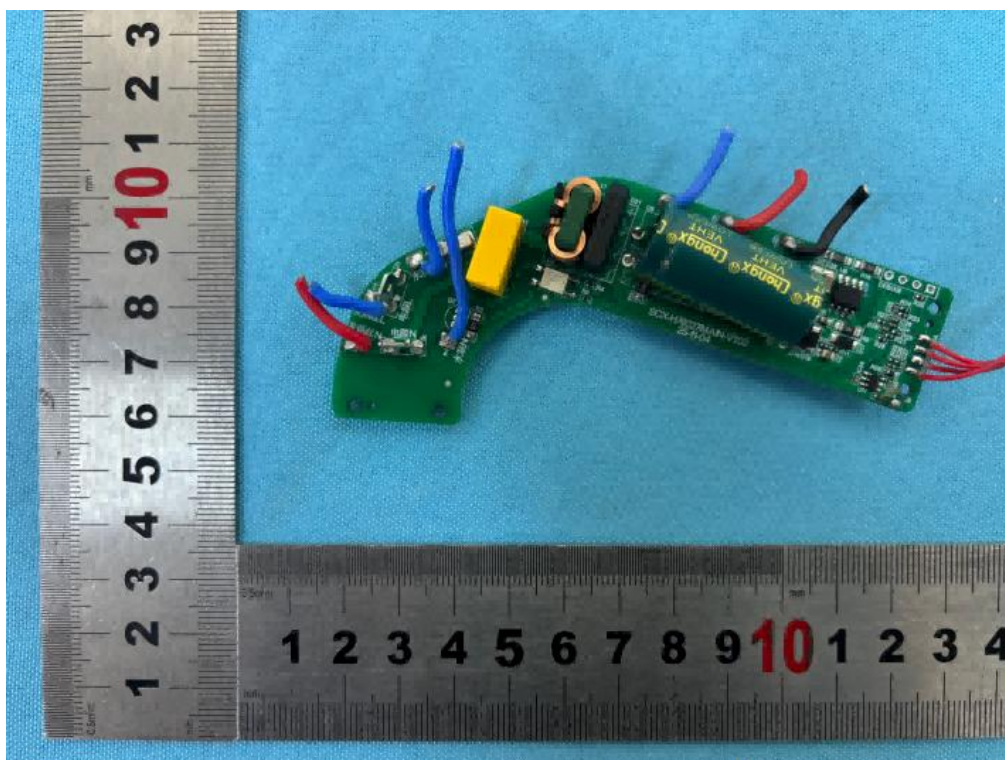


Photo 10 PCB View of EUT

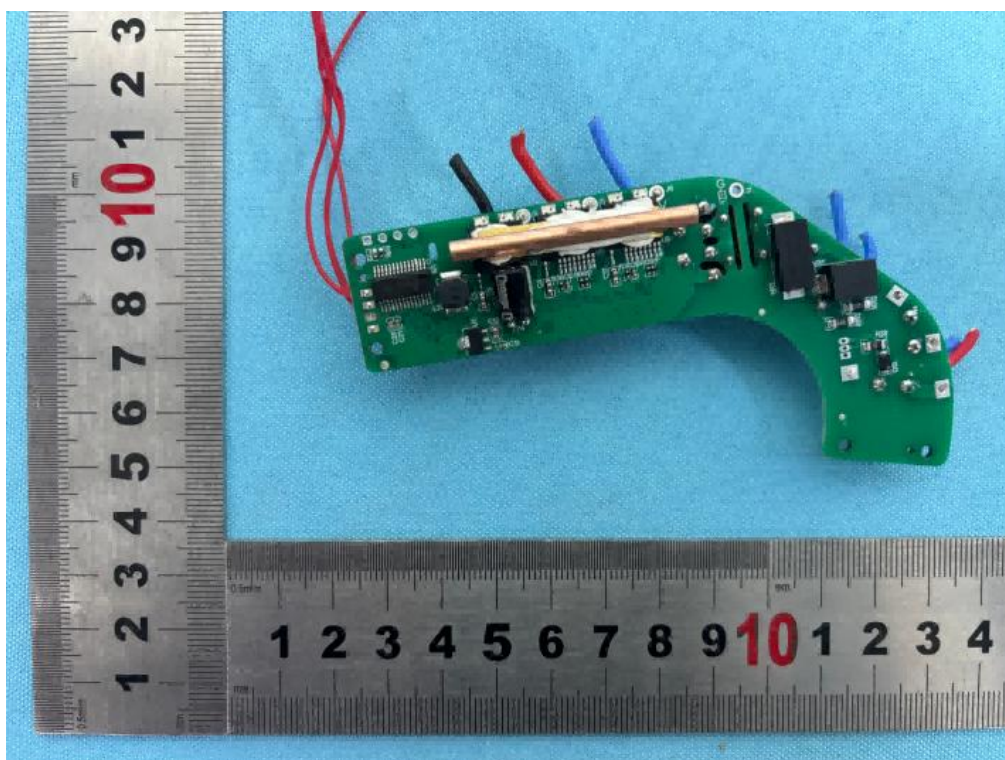

-----END OF REPORT-----