



Residential door system



EuroFutur® Classic

Residential door with inter-sash residential door panelling

In cooperation with

RODENBERG 
GESICHTER EINER TÜR



KÖMMERLING®



The suitable door for *your world*

Windows and doors form part of your living space and your own personal living environment. You should therefore give your full attention to your decision for the right residential door system.


The residential door system provides all that is needed for high quality, inward opening residential door systems with 70 mm construction depth.

In this three chamber system, both internal and external insulating chambers provide a shield against cold and heat. EuroFutur Classic residential doors also exhibit a high base stability. The large steel reinforcements form a solid, closed frame. The sash corners are reinforced with welded corner connectors forming a nonpositive connection with the steel reinforcement. These absorb bending and torsional forces, – e.g. from jemmey attempts, and deflect them through the entire surrounding steel frame.

Following this trend of modern residential door panelling, the profine Group has developed and patented an innovative solution for attaching inter-sash add-on panelling (EP 2 034 119 A2). The inter-sash add-on panelling can be combined with the extensive panelling range provided by the exclusive partner Rodenberg for a countless number of design variants.

greenline 

Our greenline principle: that extra sustainability in the form of energy efficient window systems, lead free stabilisers in virgin material, and intelligent regrind concepts.

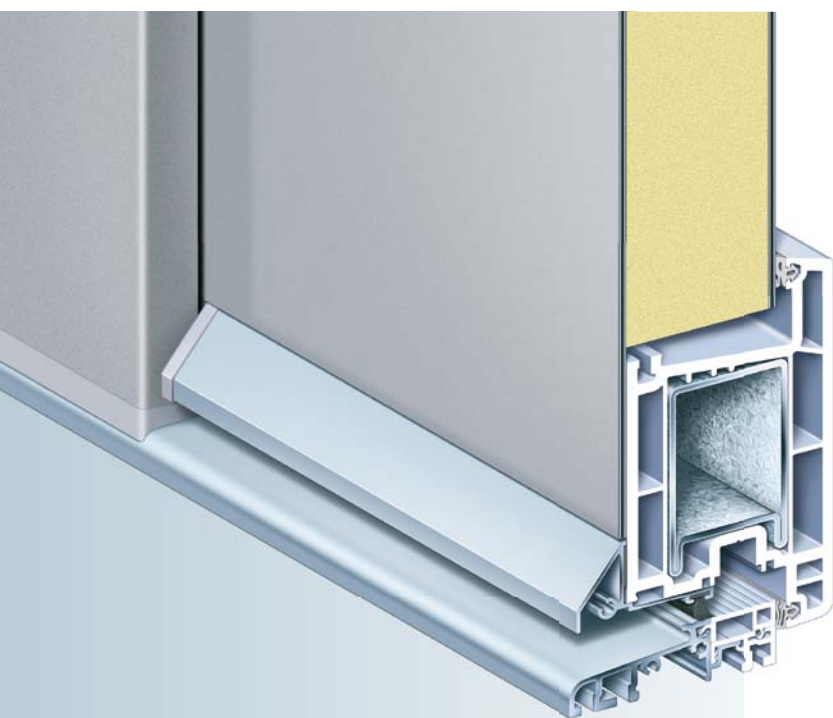

- ▶ Highly insulating residential door system with 70 mm construction depth, U_d value = $1.0 \text{ W}/(\text{m}^2\text{K})^*$
* Calculated value as per DIN EN 10077-2 based on element size 1100 x 2100 mm
- ▶ Three chamber design of straight lines.
- ▶ Max dimensioned steel reinforcement and welded corner connector for greater static properties.
- ▶ Purist, innovative, functional, extravagant, and design oriented through inter-sash residential door panelling.
- ▶ Countless design variants from the extensive panelling range provided by the exclusive partner Rodenberg.
- ▶ Clear play of lines also on the inside – a glazing bead is no longer necessary.
- ▶ Two sealing levels and the double seal to the barrier free threshold with thermal break ensure in addition a high level of protection against driving rain and the optimal imperviousness to wind.
- ▶ threshold connector for precision fitting and sealing between frame and threshold.
- ▶ Aluminium weather bar and rebate pad set for additional protection against driving rain.
- ▶ Max sash sizes
single sash side hung door 1200 x 2400 mm

profine GmbH
KÖMMERLING KUNSTSTOFFE

Postfach 2165 · 66929 Pirmasens · Germany
Tel. +49 6331 56-0 · Fax +49 6331 56-2475
Email: info@koemmerling.de
Internet: www.koemmerling.de