

Rotorcraft

1.1 Introduction

This chapter moves on from airplane movement to quadcopters! You may here rotor-winged aircraft, drones, or unmanned aerial vehicle, which all refer to similar types of the same structure.

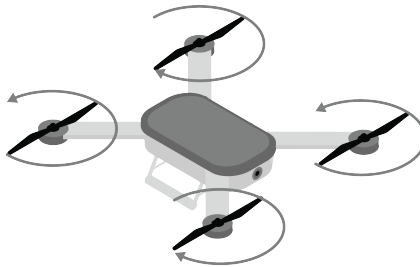


Figure 1.1: The general look of a quadcopter. Includes four rotors, a frame called a fuselage, and generally a head or designated front.

Before we dive in depth, let's introduce a few terms that will be repeated within this chapter.

Quadcopter Often defined as an aircraft with 4 rotors, synonymous with drone.

Rotor The rotor is the part of the aircraft which causes lift by spinning at a high velocity. It consists of a central *hub* with two or more *blades* attached. You may hear the term propeller like from our airplanes chapter, but the more correct term for quadcopters is *rotor*.

UAS / UAV Unmanned Aircraft System or Unmanned Aircraft Vehicle. Often used to

describe drones or semi-autonomous quadcopters. This includes the drones themselves, the software needed to avoid obstacles and track positioning, and equipment used by people to communicate with them.

Fuselage The main body of a quadcopter or aircraft; synonymous to frame.

Isometric We also want to be clear about our use of views in our diagrams. An *isometric* perspective is one that visually represents all 3 views of a 3D object in a 2D space (a printed diagram). When we get to calculus, we will talk about *isometry* as transformation or mapping between two spaces that perfectly preserves distances.

1.2 VTOL

The strength of quadcopters lies in their propulsion system. As compared to airplanes, which take off by accelerating down *runways* and gaining enough lift to overcome its weight, quadcopters use spinning rotors to generate this lift. This applies Newton's Third Law — for every action (the downwards lift of the rotors), there is an equal and opposite reaction (the upwards lift of the quadcopter). This allows quadcopters to take off vertically, eliminating the need for a runway. This is a very special type of propulsion known as Vertical Take-Off and Landing (VTOL).

Specifically, the drone's rotors needs to generate enough lift to counteract its own weight and put it into motion in the air. Recall that there are *equal but opposite* forces in play here, so the lift created by the rotors can be found by

$$F_{\text{rotors}} = m_{\text{quadcopter}} g + F_{\text{vertical lift}}$$

This is a rudimentary equation that demonstrates the following: the amount of lift created by rotors is the excess force after the rotors are able to overcome the weight of the quadcopter.

Here is an isometric view of vertical flight of a quadcopter

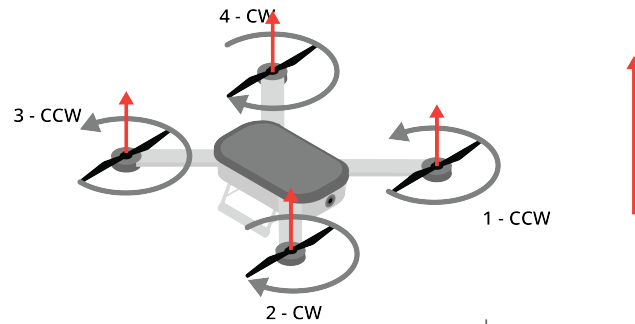


Figure 1.2: A quadcopter taking vertical flight. Notice how the red arrows, representing the strength of the upwards force, are all equivalent.

If we just want our quadcopter to *hover in place*, the forces vertically need to be equal. This means that the weight of the quadcopter will equal the lift generated by the rotors

$$F_{\text{rotors}} = m_{\text{quadcopter}} g \quad (1.1)$$

1.3 Rotor Structure

Now, the remaining question is how do rotors work?

Recall our airplanes chapter; the wings are what create lift, and this is heavily dependent on the wings shape. On quadcopters, each rotor is made up of two or more *blades* attached to a central hub, and these blades are specifically designed to push air *opposite* the direction the aircraft needs to go.

FIXME diagram labeling blades

Each blade has a *root*, which connects to the hub, and a *tip* at its outer end. Along its length, the blade also has a *twist*, where the blade's angle gradually changes from root to tip, similar to the shape of a screw thread.

FIXME diagram comparing screw to shape of blade with twist

The direction the air is pushed depends on which way the quadcopter goes; reversing the rotation of a rotor reverses the direction of the air pushed, and thus the direction of the quadcopter.

Rotors are typically described by three numbers: their *diameter*, their *pitch*, and their *number of blades*. Typically, you will see something like *10x5 inch*, which refers to the diameter and pitch, and the visual will tell you the number of blades.

The diameter measures the tip to tip distance that a propeller can reach. If there is only 1 blade, this measurement is twice the hub-to-tip distance. Larger diameter rotors move a bigger column of air, but at slower speeds. Thrust scales roughly equal to the square of velocity, while power scales to the cube of velocity. Bigger props are meaningfully more efficient. This is the same reason helicopters use one large slow rotor while quadcopters use several small fast ones.

Two is the typical amount of blades per propeller, and ensure symmetry along the Y-Axis, as well as mass-production capability. Adding blades increases total thrust at a given diameter and RPM, but each additional blade partly flies through the turbulent wake left by the blade ahead of it (this is called *aerodynamic interference*), so you get diminishing thrust returns per blade.

The pitch is the distance the propeller would move after one 360° rotation. Similar to how a screw moves when twisted, this measurement predicts how the propeller would move in vertical space. Lower pitch means less torque needed and higher maximum RPM, but less thrust and vertical movement is produced per rotor. Higher pitch generates more thrust and RPM, but draws more torque from the motor.


1.4 Movement, Spin Direction, and Torque

Generally, two rotors spin clockwise (CW) and two spin counter-clockwise (CCW). Rotors positioned diagonally from each other spin in the same direction. Rotors right next to each other spin in opposite directions. If all four rotors spun in the same direction, the body of the drone would violently spin in the opposite direction. By having two CW and two CCW motors, the forces cancel each other out. This balance allows the drone to hover completely still and turn smoothly post-VTOL. There is a guide in your digital resources that goes into blade selection based on your use case, very interesting!


In theory, quadcopters that are symmetrical such as drones could be flown in any direction (this is called *headless flight*). This is easier for beginners as the direction away from the operator is forward, and the direction toward the operator is backwards, regardless of rotation.

Often a front is decided so that the fuselage body can we can determine roll, pitch, and yaw; this front is called the head. That way, its rotation and flight is based on its relative position in the world, not the operator's location. In the following discussion on forces


present on quadcopters, we will assume that there is no drag and our center of gravity is in the center of the fuselage, just as with all other ideal scenarios.

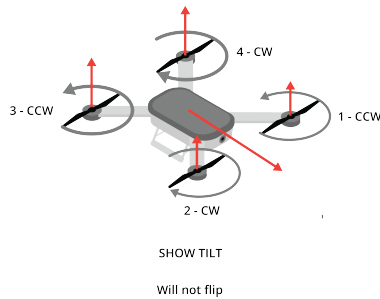


(a) forwardIso.png

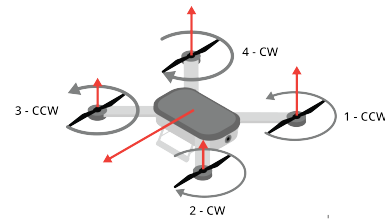

(b) lateralIso.png



(a) forwardTop.png

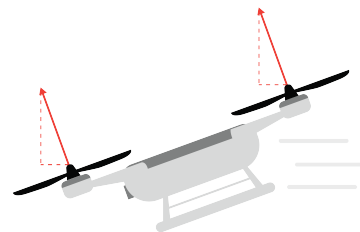


(b) forwardSide.png


When flying a quadcopter forward, we apply *pitch* to the quadcopter (figure 1.3a). When doing this, we generate a greater amount of torque from the back two rotors (see 1.4a). This causes the copter to tilt forward with the back rotors higher than the front two rotors (see 1.4b), and direct its motion in the direction of the head. Backwards motion is very similar; the *front* rotors relative to the head spin at a greater rate, and as a result, tilt higher than the back motors, causing backwards motion.

As with airplanes, left and right movement, or *lateral movement*, is controlled by *roll*. Figure 1.3b shows a quadcopter rolling to the left. To produce this roll, the rotors to the *right* of the head spin faster than the rotors to the left, generating extra lift on the right side of the fuselage. This lifts the right side and tips the left side down, tilting the quadcopter's

thrust to the left and carrying it in that direction (see 1.5b). Rightward movement works the same way in reverse: the rotors to the *left* spin faster, lifting the left side and rolling the quadcopter to the right.




(a) lateralTop.png




(b) lateralSide.png

Rotation of the ahead about the center of gravity is called *yaw*. Instead of two adjacent rotors having increased speeds, we adjust two diagonal rotors to have greater speeds than the other two. Increasing the clockwise rotors will cause a counterclockwise or left rotation. Rightward rotation is similar: increasing the counterclockwise rotors causes a clockwise

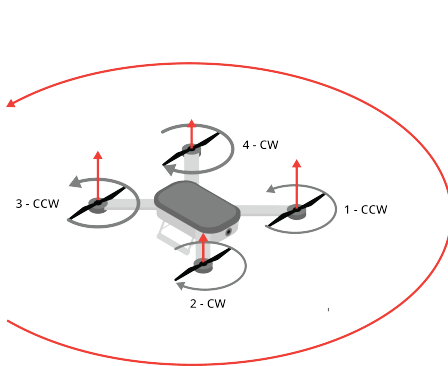

(a) rotationIso.png




(b) rotationTop.png

1.5 Helicopters



1.5.1 Introduction


Single Rotor Quadcopter - Helicopter

Instead of a fixed wing like on an airplane, the main rotor (one large rotor, compared to a quadcopter's four) rotates to produce lift.

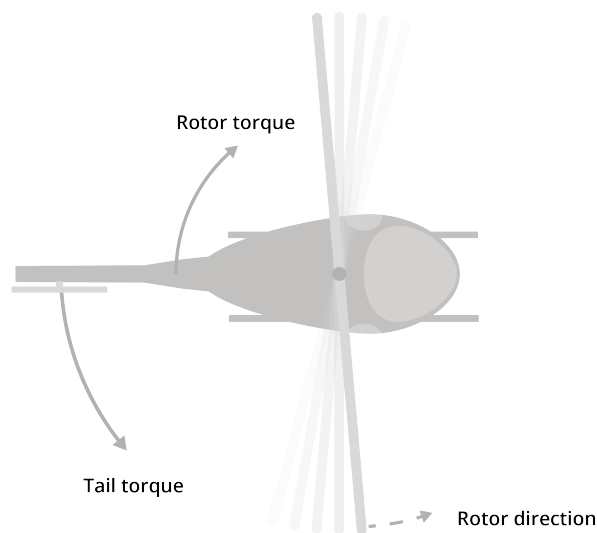

Sequence: Rotor/Tail, Show how the tail rotor works, then show how the control works for the main rotor

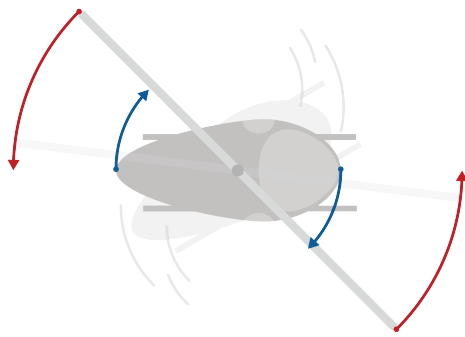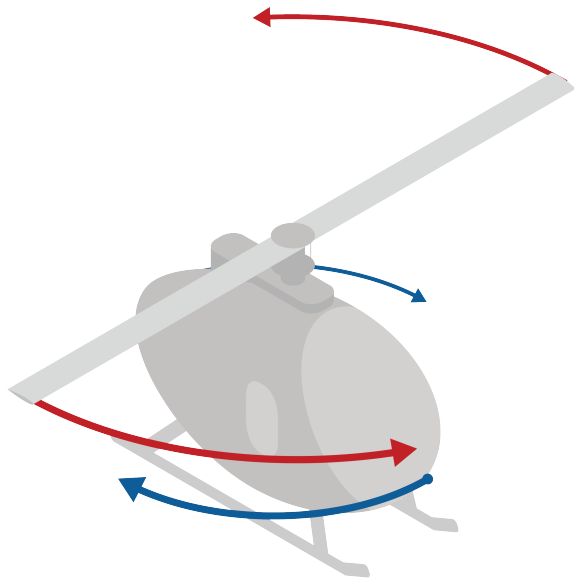

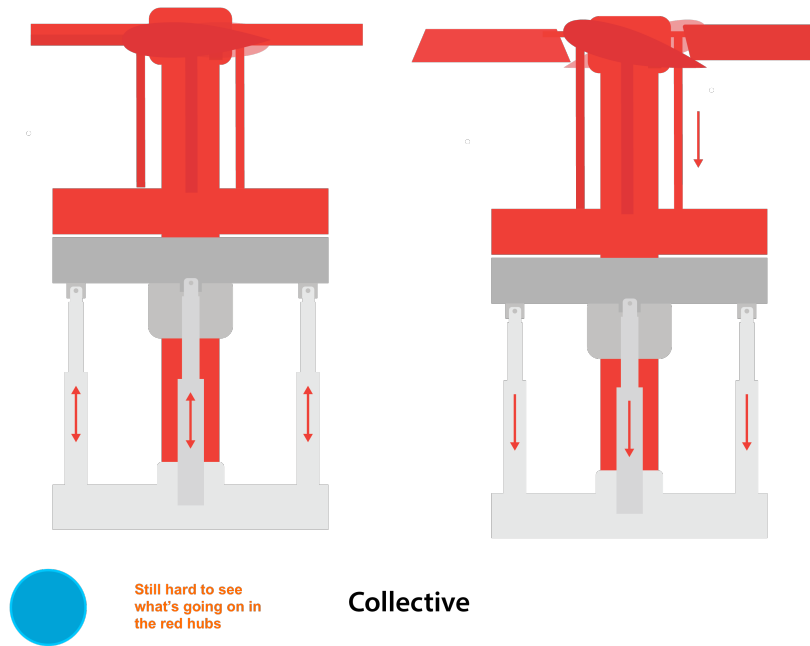

This is a draft chapter from the Kontinua Project. Please see our website (<https://kontinua.org/>) for more details.

Answers to Exercises



INDEX

aerodynamic interference, [4](#)

blades, [1](#), [3](#)

diameter, [4](#)

headless flight, [4](#)

isometric, [2](#)

isometry, [2](#)

lateral movement, [5](#)

number of blades, [4](#)

pitch, [4](#), [5](#)

quadcopter

 propellers

 numbers, [4](#)

roll, [5](#)

root, [3](#)

rotor, [1](#)

tip, [3](#)

twist, [3](#)

yaw, [6](#)