

# System for human identification based on finger vein pattern

Paweł Kupidura

## 1. Introduction

A reliable biometric system, which is essentially a pattern-recognition that recognizes a person based on physiological or behavioral characteristic, is an indispensable element in several areas, including e-commerce, various forms of access control security, and so on. Nowadays, security has been important for privacy protection and country in many situations, and the biometric technology is becoming the base approach to solve the increasing crime.

As the significant advances in computer processing, the automated authentication techniques using various biometric features have become available over the last few decades. Biometric characteristics include fingerprint, face, hand/finger geometry, iris, retina, signature, gait, voice, hand vein, odor or the DNA information.

Vein pattern is the network of blood vessels beneath person's skin. Vein patterns are sufficiently different across individuals, and they are stable unaffected by aging and no significant changed in adults by observing. It is believed that the patterns of blood vein are unique to every individual, even among twins. Veins are internal, thus this characteristic makes the systems highly secure, and they are not been affected by the situation of the outer skin.

## 2. System outline


Goal of this project was to provide full system for user identification – from capturing image, to result of identification.

First phase was meant to be capturing image using IR camera and near infrared light source. Details and results of hardware part are described in section 3.

Main part of the system is vein pattern extraction algorithm. Approach taken in this project is modified maximum curvature algorithm. Other algorithms and details of chosen one are described in section 4.

Last phase of the system is template matching with ambiguous regions, to check extracted pattern against already registered patterns. This part is described in section 5.

*System flow*

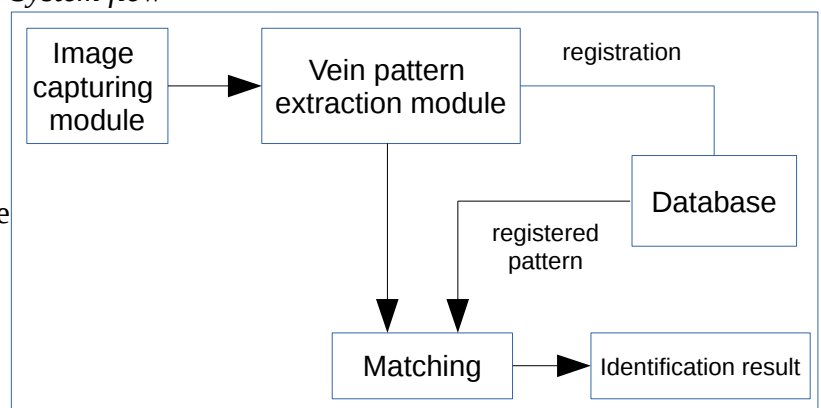


### 3. Vein image capturing

#### 3.1 Theory

As veins are internal, their structure cannot be discerned in visible light. Until now, researchers used infrared imaging for personal identification.

Infrared is commonly divided into 3 spectral regions: near, mid and far-infrared light, but the boundaries between them are not agreed upon. There are two choices that focuses on imaging of vein patterns in hand by infrared light, the far-infrared (FIR) imaging and the near-infrared (NIR) imaging, which are suitable to capture human bodies images in a non-harmful way. [4]

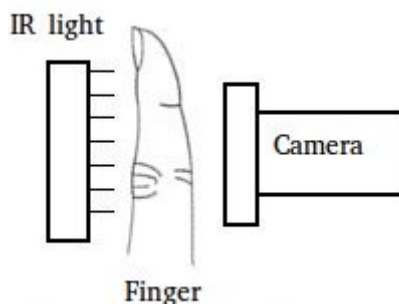

*Hardware system outline*

#### 3.2 Results

For this project I tried to build low-cost camera system for capturing finger veins using near-infrared light.

Core of hardware part was Sony Eye camera. It was modified so it can capture infrared light – factory lens was removed. Instead, lens without IR filter was mounted.


The biggest issue with this system was to provide combination of light source and visible light filter for camera.

As light filter floppy disk and photographic film were used – due to relatively low cost and common usage in similar projects. Experiments have shown that floppy disk is too strong as a filter – cutting of waves way beyond desired 820nm. Photographic film gave promising results, but due to lack of proper light source, it was not perfect.

When it comes to light sources, few options may be considered. Keeping low-cost assumption, experiments were conducted with regular light bulbs, IR blaster from mobile phone and remote control. Only the first one gave sensible results for palm veins – but not good enough to capture finger veins.

The best option would be constructing matrix of IR LEDs – but with limited budget (and technical skills) it was not considered in this project. Another option, that would be cheaper than matrix, may be higher power IR blaster used for breeding reptiles or poultry.

Finally, no images were captured that would be useful for further analysis. Instead, for experiments with algorithm, example image from public database was used.

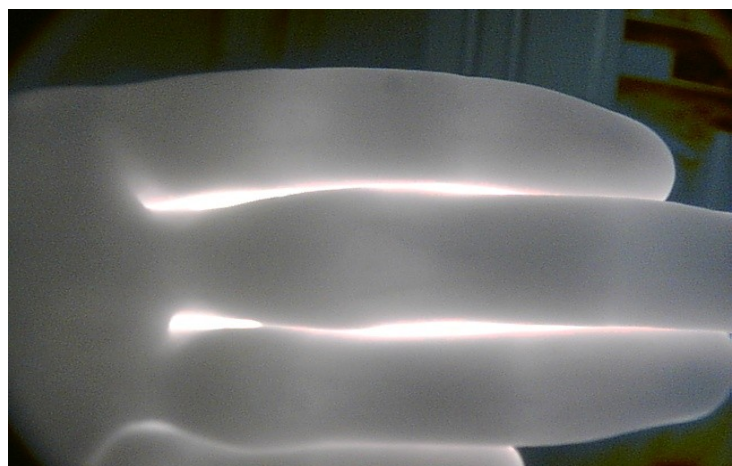


*Example of vein photo taken with Sony Eye and regular light bulb*

## 4. Vein pattern extraction

Multiple methods for vein pattern extraction were proposed since veins have been considered as useful. Conventional methods such as the matched filter [3] method can extract patterns if the widths of veins are constant. However, these method cannot extract veins that are narrower/wider than the assumed widths, which degrades the accuracy of the personal identification. The repeated line tracking method [2] can extract vein patterns from an unclear image, but it cannot sufficiently extract thin veins because the number of times that the tracking point moves on thin veins tends to be small statistically.

In my system I will use algorithm proposed by Miura [1] based on maximum curvatures of cross-sectional profiles of image. This approach allows to extract veins that are thin or bright on captured image.


However, my current research on this algorithm reveals possible problems with specific kind of veins

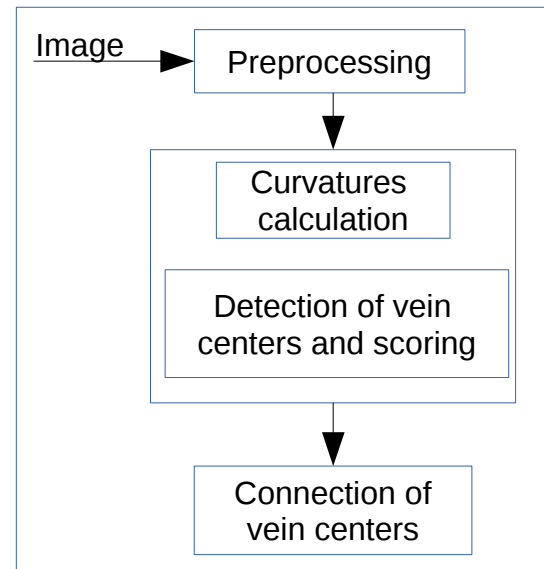

*Pattern extraction flowchart*

Algorithm for vein pattern extraction consist of four steps:

- I. Image preprocessing
- II. Extraction of center positions of veins
- III. Connection of veins centers
- IV. Binarization

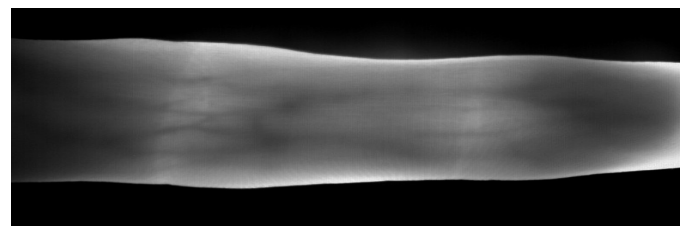


*Image used for experiments*

### I. Image preprocessing.

On captured grayscale image, histogram equalization and sharpening filter will be applied to improve contrast. Higher contrast allows to get deeper valleys on cross-sectional profile of veins, which is core part of algorithm.

Also, finger region will be detected to ignore background during pattern extraction.

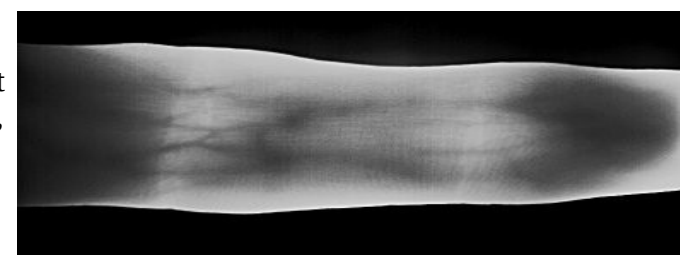


*Preprocessing result*

### II. Extraction of center positions of veins

To extract the centerline of veins with various widths and brightnesses, this method checks cross-sectional profiles of a finger-vein image. The cross-sectional profile of a vein looks like a dent because the vein is darker than the surrounding area. The center position of veins can be obtained by calculating local maximum curvatures in cross-sectional profiles. A score is assigned to each position, and it is larger when its dent is deeper or wider.

*Cross-sectional profile, curvatures and scores. [1]*

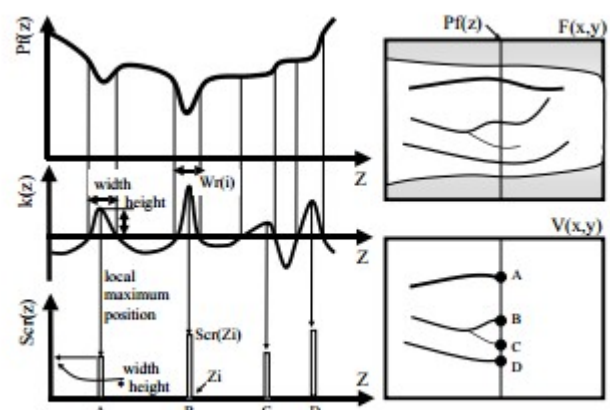

### Calculation of the curvatures of profiles:

$F$  is a finger image, and  $F(x, y)$  is the intensity of pixel  $(x, y)$ . We define  $P_f(z)$  as a cross-sectional profile acquired from  $F(x, y)$  at any direction and position, where  $z$  is a position in a profile. To relate a position of  $P_f(z)$  to that of  $F(x, y)$ , the mapping function  $T_{rs}$  is defined as  $F(x, y) = T_{rs}(P_f(z))$ .

The curvature,  $K(z)$ , can be represented as 
$$K(z) = \frac{d^2 P_f(z) / dz^2}{(1 + (dP_f(z) / dz)^2)^{\frac{3}{2}}}$$

### Detection of the centers of veins and assigning scores:

A profile is classified as concave or convex depending on whether  $K(z)$  is positive or negative. If  $K(z)$  is positive, the profile  $P_f(z)$  is concave. Local maximums of  $K(z)$  in each concave area are calculated, which results in discovering possible centers of veins. Those positions are defined as  $z_i'$ , where  $i=0, 1, \dots, N-1$  (where  $N$  is the number of local maximum points in the profile).

Scores indicating the probability that found center positions are on veins are assigned to each center position. A score  $S_{cr}(z)$  is defined as follows:

$$S_{cr}(z_i') = K(z_i') \times W_r(i)$$

Where  $W_r(i)$  is the width of the region where the curvature is positive and one of the  $z_i'$  is located. If  $W_r$  is large, the probability that it is a vein is also large. Moreover, the curvature at the center of a vein is large when it appears clearly. Therefore, the width and the curvature of regions are considered in their scores. Scores are added to appropriate position on a plane  $V$ , which is a result of the emphasis of veins.

Calculations described above are done for cross-sectional profiles in four directions: vertical, horizontal and two diagonal. It allows to analyze all veins regardless of their direction – however original version of algorithm described in [1] does not always work properly with veins for which direction is neither vertical, horizontal or diagonal (angles between those discrete values). It is possible area for improvement.

---

**Algorithm 1** Centers extraction from curvature

---

```
1: procedure CENTERS_EXTRACTOR
2:    $width \leftarrow 0$ 
3:   for  $y \leftarrow 1, \text{image height}$  do
4:     for  $x \leftarrow 1, \text{image width}$  do
5:       if  $curvature(y, x) > 0$  then
6:          $width \leftarrow width + 1$ 
7:       if  $width > 0$  and (end of image or  $curvature(y, x) < 0$ ) then
8:          $maximum \leftarrow \text{position of max curvature for currently tracked vein}$ 
9:          $score \leftarrow curvature(y, maximum) * width$ 
10:         $veins(y, maximum) \leftarrow veins(y, maximum) + score$ 
11:         $width \leftarrow 0$ 
```

---

Algorithm for processing one of four directions



Extracted vein centers (may be barely visible on paper)

### III. Connection of vein centers.

To connect the centers of veins following operations are done. First, two neighboring pixels on the right side and two neighboring pixels on the left side of pixel  $(x, y)$  are checked.

If  $(x, y)$  and the pixels both sides have large values, a line is drawn horizontally. When  $(x, y)$  has a small value and the pixels on both sides have large values, a line is drawn with a gap at  $(x, y)$ . Therefore, the value of  $(x, y)$  should be increased to connect the line. When  $(x, y)$  has a large value and the pixels on both sides of  $(x, y)$  have small values, a dot of noise is at  $(x, y)$ . Therefore, the value of  $(x, y)$  should be reduced to eliminate the noise.

This operation can be represented as follows:

$$C_{d1}(x, y) = \min(\max(V(x+1, y), V(x+2, y)), \max(V(x-1, y), V(x-2, y)))$$

Then, this calculation is made for the rest of directions, so  $C_{d2}$ ,  $C_{d3}$  and  $C_{d4}$  are calculated.

Finally, final image  $G(x, y)$  is obtained by selecting maximum of  $C_{d1}$ ,  $C_{d2}$ ,  $C_{d3}$  and  $C_{d4}$  for each pixel. Result  $G(x, y)$  is extracted vein pattern.

```
for x=3:img_width
    for y=3:img_height
        horizontal = min(max(centers(y,x+1), centers(y,x+2)), max(centers(y,x-1), centers(y,x-2)))
        vertical = min(max(centers(y+1,x), centers(y+2,x)), max(centers(y-1,x), centers(y-2,x)))
        diagonal = min(max(centers(y-1,x-1), centers(y-2,x-2)), max(centers(y+1,x+1), centers(y+2,x+2)))
        rdiagonal = min(max(centers(y+1,x-1), centers(y+2,x-2)), max(centers(y-1,x+1), centers(y-2,x+2)))
        veins(x, y) = max(horizontal, vertical, diagonal, rdiagonal)
```



*Connected centers with applied binarization (for better visibility)*

### IV. Binarization

Finally, vein pattern  $G(x, y)$  is binarized with threshold. Median of values in  $G$  is used as threshold value.

## 5. Template matching

In the matching process, the pattern is converted into matching data, and these data are compared with recorded data.

Two methods are commonly used for matching lineshaped patterns: structural matching and template matching. Structural matching requires additional extraction of feature points such as line endings and bifurcations. Since a finger-vein pattern has few of these points, template matching based on comparison of pixel values is more appropriate for finger-vein pattern matching.

The conventional template-matching technique is not robust against pattern distortion. To solve this problem, the “ambiguous regions” around the veins are identified, and the slight misalignments between vein patterns in these regions are ignored. Robust template-matching is thereby achieved.

## 6. Conclusions

This brief outline will be base for future work on the system. Research and prototyping phase allowed to point out only possible flaws of chosen algorithms and approaches, but certainly there is space for improvement.

Tests of initial implementation have shown that algorithm proposed by [2] does not always work properly with veins rapidly changing angles.

## References

1. Miura, N., A. Nagasaka and T. Miyatake, 2005. Extraction of Finger-Vein Pattern Using Maximum Curvature Points in Image Profiles. In IAPR conference on machine vision applications, 9: 347-350.
2. Miura, N., A. Nagasaka and T. Miyatake, 2004. Feature Extraction of finger-vein patterns based on repeated line tracking and its Application to Personal Identification. Machine Vision and Applications, 15: 194- 203.
3. A. Hoover, V. Kouznetsova, and M. Goldbaum, "Locating Blood Vessels in Retinal Image by Piece-wise Threshold Probing of a Matched Filter Response," IEEE Transactions on Medical Imaging, 2000.
4. Rongyang Xiao, Gongping Yang , Yilong Yin, and Lu Yang, 2013. A Novel Matching Strategy for Finger Vein Recognition IScIDE 2012, LNCS 7751, pp. 364–371.
5. Mohd Shahrime Mohd Asaari, Shahrel A. Suandi, Bakhtiar Affendi Rosdi, "Fusion of Band Limited Phase Only Correlation and Width Centroid Contour Distance for finger based biometrics", Expert Systems with Applications, Volume 41, Issue 7, 1 June 2014, Pages 3367-3382, ISSN 0957-4174, <http://dx.doi.org/10.1016/j.eswa.2013.11.033>.