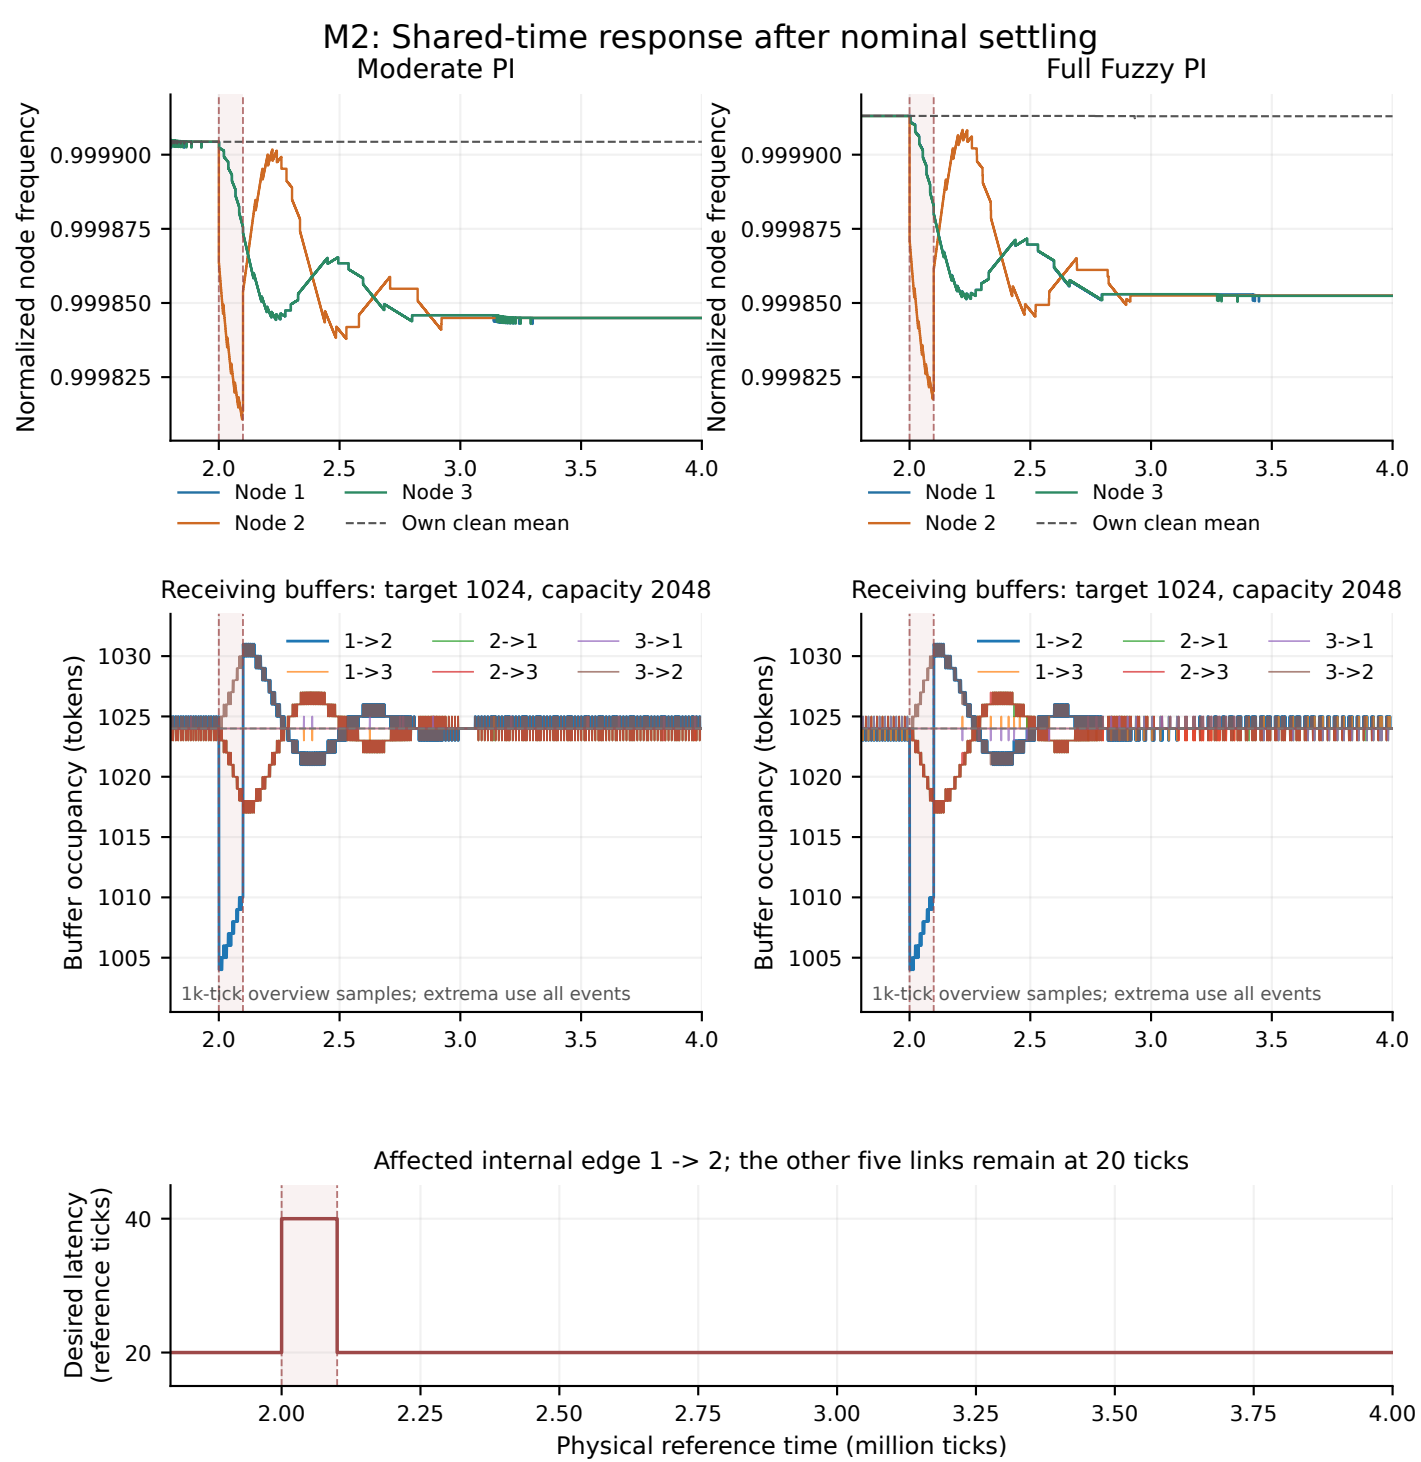


All frequencies are positive. Node/edge IDs are internal 1-based indices.
Send-time latency transitions and actual arrivals differ; Figure 2 resolves the events.