


Part number		RKJXV1224005	
Number of operating shafts		Single-shaft	
Shaft material		Resin	
Lever return mechanism		With	
Potentiometer part	Maximum operating voltage		50V AC, 5V DC
	Operating angle		Each direction 23° max.
	Resistance taper		B (0B)
	Total resistance		10kΩ
	Operating life		2,000,000cycles
Center push part	Center push		With
	Ratings (max.)		50mA 12V DC
	Travel		0.4(+0.5, -0.3)mm
	Operating life		500,000cycles
Operating temperature range		-10ℓ to +70ℓ	
Electrical performance	Directional resolution		Continuous
	Insulation resistance		100MΩ min. 250V DC
	Voltage proof		250V AC for 1 minute
	Rated power		0.0125W
	Slider noise		300mV p-p max. by JIS method
Mechanical performance	Directional operating force		14±10mN•m
	Push operating force		7.4±3N
	Lever return precision		±5°
	Actuator strength	Push/pull directions	98N min. (Push), 50N min. (Pull)
Durability	Operating life	Directions	2,000,000 cycles
		Center push	500,000 cycles

Environmental performance	Cold	-30 to 96h
	Dry heat	80 to 96h
	Damp heat	60, 90 to 95%RH 96h
Minimum order unit (pcs.)	Japan	1,600
	Export	1,600
3D CAD (STEP)		↓
Certificate of Compliance to RoHS regulations		↓


Photo



Dimensions

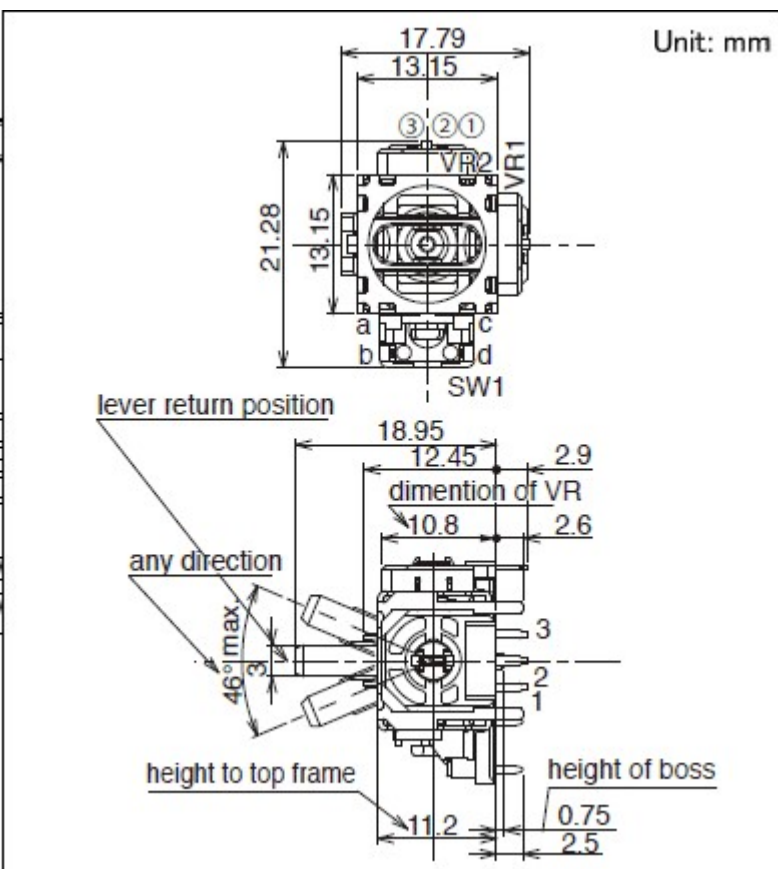

Mounting Hole Dimensions

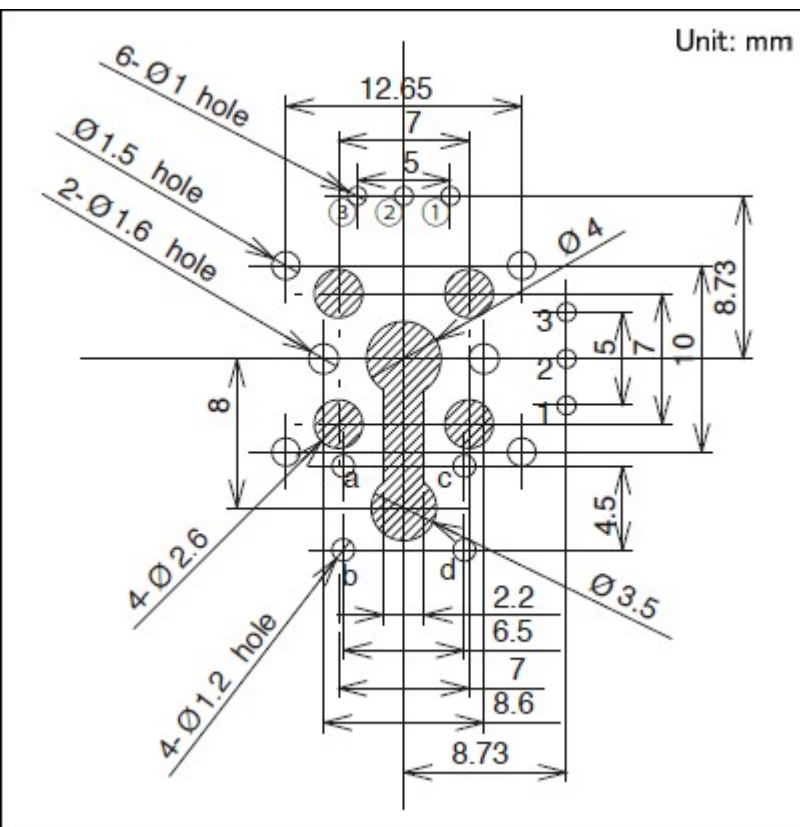

Viewed from mounting side.

Packing Specifications

Tray

Number of packages (pcs.)	1 case / Japan	1,600
	1 case / export packing	1,600

Export package measurements (mm)	540×360×250
----------------------------------	-------------

Soldering Conditions

Reference for Dip Soldering

Preheating	Soldering surface temperature	90 to 100ℓ
	Heating time	60s max.
Dip soldering	Soldering temperature	260ℓ
	Soldering time	5s
No. of solders		1 time

Reference for Hand Soldering

Tip temperature	350ℓmax.
Soldering time	3s max.
No. of solders	1 time

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).

Inquiries about Products

 [Inquiry](#)