
## Leatech SINGLE DIGIT DISPLAY

## 2.3" SINGLE DIGIT DISPLAY Electrical/Optical Characteristics at T<sub>A</sub>=25°C & I<sub>F</sub>=20mA

PART NUMBER		CHIP (nm)	V <sub>F</sub> (V)		$\mathbf{I}_{\mathbf{V}}$	
COMMON ANODE			SEG.	DP.	(mcd)	
(COMMON CATHODE)		TYP.	TYP.	MAX.	MIN.	TYP.
LA(C)2321-41EWRN	GREEN	572	8.4	4.2	9.2	15.3
LA(C)2331-41EWRN	YELLOW	589	8.4	4.2	7.4	12.4
LA(C)2341-41EWRN	ORANGE	630	8.4	4.2	10.5	17.6
LA(C)2341R-41RRRN	ORANGE	630	8.4	4.2	10.5	17.6
LA(C)2371-41-M1EWRN	RED	660	6.8	3.4	41.1	68.5
LA(C)2351-41EWRN	RED	700	8.4	4.2	2.4	4.1

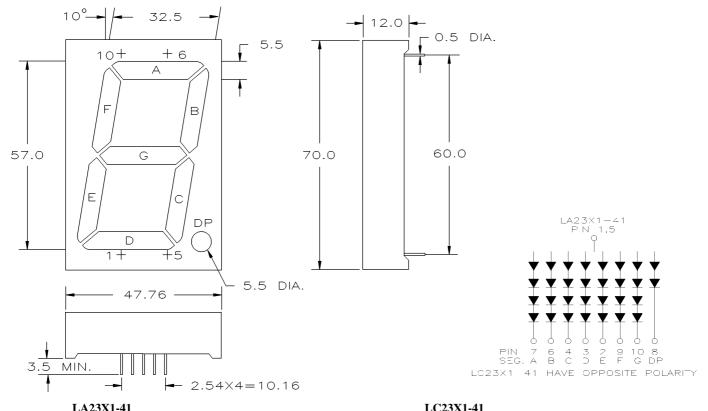

**FUNCTION** 

**CATHODE** 

**CATHODE** 

F

9. ANODE

10. ANODE

COMMON ANODE		LC23A1-41			
		COMMON CATHODE			
PIN		PIN			
NO.	FUNCTION	NO.	FUNC'		
1. COMMON	ANODE	1. COMMON	CATH		
2. CATHODE	E	2. ANODE	$\mathbf{E}$		
3. CATHODE	D	3. ANODE	D		
4. CATHODE	C	4. ANODE	C		
5. COMMON	ANODE	5. COMMON	CATH		
6. CATHODE	В	6. ANODE	В		
7. CATHODE	$\mathbf{A}$	7. ANODE	A		
8. CATHODE	DP	8. ANODE	DP		

9. CATHODE

10. CATHODE