AD 2. AERODROMES

VEAY AD 2.1 AERODROME LOCATION INDICATOR AND NAME

VEAY - MAHARISHI VALMIKI INTERNATIONAL AIRPORT
AYODHYADHAM,AYODHYA

VEAY AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	Aerodrome reference point coordinates and its site	264514N 0820901E 304.82 DEG/292M from physical extremity of RWY 11.	
2	Direction and distance of aerodrome reference point from the centre of the city or town which the aerodrome serves	Airport is located 8 KM south of Ayodhya Junction Railway station and 3 KM Northeast of Ayodhya Cantt. Railway station.	
3	Aerodrome elevation and reference temperature	329 FT / 42.8 DEG C	
4	Magnetic variation, date of information and annual change	0.25 DEG E (2010) /0.0167 DEG E	
5	Name of aerodrome operator, address, telephone, telefax, e-mail address, AFS address, website (if available)	Airport Director Airport Authority of India Maharishi Valmiki international airport, Ayodhyadham Ayodhya-224001,	
		Telephone:	(91) 9336677127
		Fax:	
		AFS:	VEAYZTZX
		Email:	apdayodhya@aai.aero
6	Types of traffic permitted (IFR/VFR)	IFR/VFR	
7	Remarks	Gravity Model: EGM08	

VEAY AD 2.3 OPERATIONAL HOURS

1	Aerodrome Operator	Airports Authority of India MON TO FRI: 0400 to 1230 UTC (0930 to 1800 IST) SAT, SUN, HOLIDAY-NIL.
2	Custom and immigration	NIL
3	Health and sanitation	Provided by municipal corporation and health department.
4	AIS briefing office	As ATS
5	ATS reporting office (ARO)	As ATS
6	MET Briefing office	As ATS
7	Air Traffic Service	Consult Current NOTAM for ATS HR.
8	Fuelling	Provided by HPCL and IOCL.
9	Handling	Provided by approved handler.
10	Security	Provided by CISF
11	De-icing	NIL
12	Remarks	NIL

VEAY AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	No exclusive facilities. Cargo is handled by the concerned operator.
2	Fuel and Oil types	ATF

3	Fuelling facilities and capacity	HPCL: 01 Bowsers 15KL, HPCL-JET A1 as per ATS watch Hrs IOCL: 01 Bowsers 15 KL IOCL-JET A1 as per ATS watch Hrs
4	De-icing facilities	NIL
5	Hangar space for visiting aircraft	NIL
6	Repair facilities for visiting aircraft	On Apron (On Request).
7	Remarks	NIL

VEAY AD 2.5 PASSENGER FACILITIES

1	Hotel(s) at or in the vicinity of aerodrome	In nearby townships within 5 Km.
2	Restaurant(s) at or in the vicinity of aerodrome	In nearby townships within 5 Km.
3	Transportation possibilities	Hired Cars.
4	Medical Facilities	First Aid in the terminal building and basic facilities at PHC Hospital located within 2 KM. For serious & critical cases, District Hospital located in Ayodhya City about 5 KM from the airport.
5	Bank and post office at or in the vicinity of aerodrome	Banks: Within 2 KM from Ayodhya Airport Post office: Within 2 KM from Ayodhya Airport
6	Tourist office	Available within 5 KM (U.P. Tourism)
7	Remarks	NIL

VEAY AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	Aerodrome category for fire fighting	Within ATS HR: CAT-7
2	Rescue equipment	Ambulance 03, CFT 02
3	Capability for removal of disabled aircraft	1. The critical aircraft for the airport is A321 2. Primary responsibility for removal of disabled aircraft rests with the concerned airline. 3. The airlines may contact 'Aerodrome Coordinator for Disabled Aircraft Removal Operations' for coordinating with the agencies having Disabled Aircraft Recovery Kit. 4. Contact Details of Aerodrome Coordinator for Disabled Aircraft Removal Operations: Airport Director, Tel/Mob. +91-9336677127 Email: apdayodhya@aai.aero
4	Remarks	NIL

VEAY AD 2.7 SEASONAL AVAILABILITY CLEARING

1	Type(s) of clearing equipment	NIL
2	Clearance priorities	NIL
3	Remarks	NIL

VEAY AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Designation, surface and strength of aprons	Refer Aircraft Parking Docking Chart
2	Designation, width, surface and strength of taxiways	Refer Aircraft Parking Docking Chart
3	Location and elevation of altimeter checkpoints	Location: On Apron Elevation: 329.06824 FT
4	Location of VOR checkpoints	AT RWY HOLDING POSITION OF TAXI A & B
5	Position of INS checkpoints	NIL
6	Remarks	**1. Coordinates and Elevation of Runway Holding Positions:** **TWY** **Coordinates** **Elevation(Ft)** TWY A 264505.62N 0820908.65E 327.76 TWY B 264503.93N 0820912.81E 327.43 TWY M 264508.19N 0820920.27E 327.44 **2. Coordinates and Elevations of RWY/TWY Intersection Points:** **RWY/TWY** **Coordinates** **Elevation(Ft)** RWY/TWY A 264508.35N 0820910.02E 329.40 RWY/TWY B 264506.66N 0820914.18E 329.07 RWY/TWY M 264504.84E 0820918.69E 328.41 3. Gravity Model: EGM 08

VEAY AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand identification signs, taxiway guidelines and visual docking/parking guidance system at aircraft stands	Taxing guidance signs at all intersections with TWY and RWY and at all holding position, Gridlines at apron. Taxiing guidance provided on R/T also.
2	Runway and taxiway markings and lights	RWY Markings: Designation, THR, TDZ, Aiming Point, Centre line, RWY Edge. Lights: THR light, RWY edge light, RWY End Light TWY Marking: Centre line, Edge, Runway holding positions at TWY A, TWY B and TWY M Lights:TWY edge light
3	Stop bars (if any)	TWY A, TWY B and TWY M
4	Remarks	TWY A, TWY B and TWY M

VEAY AD 2.10 AERODROME OBSTACLES

In Approach/Take-off/Circling Area and at AD					
1	**2**	**3**	**4**	**5**	**6**
RWY/Area affected	Obstacle type	Coordinates	Elevation (EGM-08)	Marking/LGT	Remarks
In circling area and at AD	OTHER	264540.3N 0820825.6E	448	LGTD	Cell Phone Mast Top
In circling area and at AD	OTHER	264508.8N 0820925.9E	399	LGTD	Antenna on Micture P (Micture Plant Top 116.9m)
In circling area and at AD	OTHER	264537.8N 0820707.2E	479	LGTD	Cell Phone Mast Top
In circling area and at AD	OTHER	264700.9N 0820843.7E	536	LGTD	Cell Phone Mast Top
In circling area and at AD	ANTENNA	264652.9N 0820850.4E	480	LGTD	Communication Antenna Top
In circling area and at AD	OTHER	264640.4N 0820806.3E	620	LGTD	Cell Phone Mast Top
In circling area and at AD	OTHER	264628.5N 0820759.1E	536	LGTD	Cell Phone Mast Top
In circling area and at AD	OTHER	264609.1N 0820905.2E	500	LGTD	Cell Phone Mast Top
In circling area and at AD	OTHER	264601.5N 0820833.3E	485	LGTD	Cell Phone Mast Top
In circling area and at AD	BUILDING	264557.8N 0820840.2E	516	NIL	Mosque Top
In circling area and at AD	OTHER	264545.2N 0820842.5E	495	LGTD	Cell Phone Mast Top
In circling area and at AD	OTHER	264543.4N 0820848.5E	480	LGTD	Cell Phone Mast Top
In circling area and at AD	OTHER	264550.5N 0821111.7E	491	LGTD	Cell Phone Mast Top
In circling area and at AD	OTHER	264454.3N 0820835.3E	497	LGTD	Cell Phone Mast Top

In Approach/Take-off/Circling Area and at AD					
1	**2**	**3**	**4**	**5**	**6**
RWY/Area affected	Obstacle type	Coordinates	Elevation (EGM-08)	Marking/LGT	Remarks
In circling area and at AD	TOWER	264729.7N 0820840.5E	589	LGTD	All India Radio Tower

VEAY AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Name of the associated meteorological office	AMO, Ayodhya
2	Hours of service and, where applicable, the designation of the responsible meteorological office outside these hours	As per ATS watch Hours
3	Office responsible for preparation of TAFs and periods of validity and interval of issuance of the forecasts	M.C. Lucknow Interval 3 Hours
4	Availability of the trend forecast for the aerodrome and interval of issuance	Available When required
5	Information on how briefing and/or consultation is provided	Available on request
6	Types of flight documentation supplied and language(s) used in flight documentation	METAR, SPECI Language: English
7	Charts and other information displayed or available for briefing or consultation	Available on request
8	Supplementary equipment available for providing information on meteorological conditions, e.g. weather radar and receiver for satellite images;	Not available
9	The air traffic services unit(s) provided with meteorological information	Ayodhya ATS
10	Additional information, e.g. concerning any limitation of service.	NIL

VEAY AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations	TRUE Bearings	Dimensions of RWY (M)	Strength of pavement (PCN) and associated data) and surface of runway and associated stopways	Geographical coordinates for threshold and runway end
1	2	3	4	5
11	114.03 DEG	2200 x 45 M	68/R/C/W/T Concrete	THR: 264508.50N 0820909.65E RWY END: 264439.10N 0821022.22E
29	294.03 DEG	2200 x 45 M	68/R/C/W/T Concrete	THR: 264439.10N 0821022.22E RWY END: 264508.50N 0820909.65E

THR elevation and highest elevation of TDZ of precision APP RWY	Slope of runway and associated stopway	Dimensions of stopway (M)	Dimensions of clearway (M)	Dimensions of strips (M)
6	7	8	9	10
THR: 329.0FT TDZ: 329.0FT		NIL	NIL	2320 x 280 M
THR: 328.0FT TDZ: 328.0FT		NIL	NIL	2320 x 280 M

Dimensions of runway end safety areas	Location and description of arresting system (if any)	Existence of an obstacle-free zone	Remarks.
11	12	13	14
150M x 90M	NA	AVBL	Gravity Model: EGM 08
240M x 90M	NA	AVBL	Gravity Model: EGM 08

VEAY AD 2.13 DECLARED DISTANCES

RWY Designator	Take-off run available TORA (M)	Take-off distance available TODA (M)	Accelerate distance available ASDA (M)	Landing distance available LDA (M)	Remarks (including runway entry or start point where alternative reduced declared distances have been declared)
1	2	3	4	5	6
11	2200	2200	2200	2200	
29	2200	2200	2200	2200	

VEAY AD 2.14 APPROACH AND RUNWAY LIGHTING

Runway Designator	Type, length and intensity of approach lighting system	Runway threshold lights, colour and wing bars	Type of visual slope indicator system	Length of runway touchdown zone lights
1	2	3	4	5
11	SALS 420 M LIH	Green Wingbars: AVBL	PAPI LEFT/3.00 DEG	NIL
29	CAT I 900 M LIH	Green Wingbars: AVBL	PAPI LEFT/3.00 DEG	NIL

Length, spacing, colour and intensity of runway centre line lights	Length, spacing, colour and intensity of runway edge lights	Colour of runway end lights and wing bars	Length and colour of stopway lights	Remarks
6	7	8	9	10
NIL	2200 M 60 M White LIH	Red	NIL	i. Colour of last 600 M of edge lights is Yellow.
NIL	2200 M 60 M White LIH	Red	NIL	Colour of last 600 M of edge lights is Yellow.

VEAY AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	Location, characteristics and hours of operation of aerodrome beacon/identification beacon (if any)	ABN	FLG W&G EV 2SEC AVBL ATC TOWER
		IBN	NIL
2	Location and lighting (if any) of anemometer/ landing direction indicator;	LDI	AVBL
		Anemometer	North of RWY
3	Taxiway edge and taxiway centre line lights;	Edge	Available
		Centre Line	NIL
4	Secondary power supply including switch-over time;	3 DG Set 500 KVA each – 2 Working & 1 Stand - by. Switch over time is less than 15 Seconds.	
5	Remarks	NIL	

VEAY AD 2.16 HELICOPTER LANDING AREA

1	Geographical coordinates of the geometric centre of touchdown and lift-off (TLOF) or of each threshold of final approach and take-off (FATO) area	Not established
2	TLOF and/or FATO area elevation:	Not established
3	TLOF and FATO area dimensions to the nearest metre or foot, surface type, bearing strength and marking;	Not established
4	True bearings of FATO;	Not established
5	Declared distances available	Not established
6	Approach and FATO lighting;	Not established
7	Remarks	NIL

VEAY AD 2.17 AIR TRAFFIC SERVICE AIRSPACE

1	Airspace designation, geographical coordinates and lateral limits	CTR: a) Area bounded by coordinates 264053N 0814711E then along clockwise arc of 20 NM radius centred at 264500N 0820917E to 264519N 0823125E to the point of origin. Upper Limit: FL105 b) Area bounded by coordinates 264053N 0814711E to 264519N 0823125E to 264011N 0823058E to 263852N 0821806E then along clockwise arc of 10 NM radius centered at 264500N 0820917E to 263721N 0820239E to 263557N 0814922E to the point of origin. Upper Limit: FL55
2	Vertical limits	
3	Airspace classification	D
4	Call sign and language(s) of the air traffic services unit providing service;	Ayodhya Tower, English
5	Transition altitude	4000 FT
6	Hours of applicability	HO
7	Remarks	Ayodhya Approach Control Unit is combined with Ayodhya Aerodrome Control Tower.

VEAY AD 2.18 AIR TRAFFIC SERVICES COMMUNICATION FACILITIES

Service Designation	Call sign	Channel(s)	SATVOICE Number(s), if available
1	2	3	4
APP	Ayodhya Tower	119.200 MHZ	
APP	Ayodhya Tower	124.075 MHZ	
TWR	Ayodhya Tower	119.200 MHZ	
TWR	Ayodhya Tower	124.075 MHZ	

Logon address, as appropriate	Hours of operation	Remarks
5	6	7
	HO	1. Main Freq 2.Functions of Approach Control Service provided by Aerodrome Control Towerr
	HO	1. Backup Freq 2. Functions of Approach Control Service provided by Aerodrome Control Tower
	HO	1. Main Freq
	HO	1. Backup Freq

VEAY AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aids, magnetic variation and type of supported operation for ILS/ MLS, basic GNSS, SBAS and GBAS, and for VOR/ILS/MLS station used for technical lineup of the aid	Identification	Frequency(ies), Channel number(s), Service provider, and reference path identifier(s) (RPI), as appropriate	Hours of operation, as appropriate;
1	2	3	4
LOC 29 CAT I	IAYD	108.500 MHz	As ATS
GP 29	IAYD	329.090 MHz	As ATS
DME ILS 29	IAYD	CH22X	As ATS
DVOR/DME	AYD	116.000 MHz CH107X	AS ATS

Geographical coordinates of the position of the transmitting antenna	Elevation of transmitting antenna of DME/ elevation of GBAS reference point	Service volume radius from the GBAS reference point	Remarks
5	6	7	8
264512.8N 0820859.1E			
264447.3N 0821012.8E			Glide Angle 3 DEG
264447.4N 0821012.9E	346 FT		i. Gravity Model: EGM 08 ii. DME Co-located with GP
264447.9N 0821021.6E	362 FT		i. Gravity Model: EGM 08 ii. DME Co-located with DVOR

VEAY AD 2.20 LOCAL AERODROME REGULATIONS

NIL

VEAY AD 2.21 NOISE ABATEMENT PROCEDURES

NIL

VEAY AD 2.22 FLIGHT PROCEDURES

LOW VISIBILITY PROCEDURES:

1.PURPOSE

The Purpose of this SOP is to set out process and procedures to ensure added safety measures during bad weather/poor visibility conditions, to ensure smooth, safe and efficient conduct of aircraft operations, by establishing:

a) Conditions for implementation of LVP.

b) Safeguarding procedure (SP) for implementation of LVP.

c) Procedure for termination of LVP

2. SCOPE

Maharishi Valmiki International Airport, Ayodhyadham, Ayodhya is certified ILS CAT I aerodrome with a prescribed landing minima of 550 m RVR for RWY 29. The DGCA CAR on All Weather Operations mandates the establishment of Low Visibility Procedures for continuing operations below RVR values of 550 m. Accordingly Low Visibility Procedures have been established at Maharishi Valmiki International Airport, Ayodhyadham, Ayodhya to enhance and ensure safety during low visibility / bad weather conditions

3. DEFINITIONS & ABBREVIATIONS DEFINITIONS:

RVR: Runway visual range (RVR)-The range over which the pilot of an aircraft on the centre line of a runway can see the runway surface markings or the lights delineating the runway or identifying its centre line.

Touchdown zone-The portion of a runway, beyond the threshold, where it is intended that landing aero planes first contact the runway.

Obstacle Free Zone: The airspace above the inner approach surface, inner transitional surface and balked landing surface and that portion of the strip bounded by these surfaces, which is not penetrated by any fixed obstacle other than of low mass and frangible mounting, required for air navigation purposes.

Safeguarding Procedures: Safeguarding Procedures (SP) are instructions for relevant airport departments and airside operators to prepare ground services and facilities for low visibility operations, in order that when LVP are implemented all SP are complete and airport is configured for Low Visibility Procedures and Low Visibility Take-offs**.**

ABBREVIATIONS

AAI - Airports Authority of India

AGL - Aeronautical Ground Lighting ATC - Air Traffic Control

DGCA - Director General Civil Aviation FOD - Foreign Object Debris

LVP - Low Visibility Procedure

NOTAM - Notice to Airmen

PDP - Pre-Determined Position RWY - Runway

SMC - Surface Movement Control

SP - Safeguarding Procedure

TWY - Taxiway

4.PROCESS DESCRIPTION:

SL NO	PROCESS STEPS	DETAILED ACTIVITY STEPS	RESPONSIBILITY
4.1	Condition for Safeguarding Procedures	At Maharishi Valmiki International Airport, Ayodhyadham, Ayodhya Safeguarding Procedures shall be initiated when: a) The Visibility/RVR is less than 1200 m and visibility/RVR is forecast to deteriorate to 800m or less; and/or b) The cloud ceiling is 400 ft. and forecast to fall to 200 ft. or less.	
4.2	**Safeguarding Procedures (SP)**	Safeguarding Procedures are the necessary actions to prepare the airport for Low Visibility Procedures. They include: a) Carry out Runway, Taxiway, Road Holding, emergency access road and Apron inspection to ensure serviceability of visual aids and Ground Lights. b) Stop all maintenance works on the manoeuvring area and vacate all men, Material and equipment from the manoeuvring area. c) Termination of all work in progress in the localizer and glide path sensitive area. d) Removal of all equipment/material from localizer and glide path sensitive area. e) Restrictions on the movement of vehicles on the manoeuvring area and aprons. Limit the number of vehicles in the manoeuvring area to bare minimum. To meet any inescapable operational needs, vehicles may be escorted by Follow Me under intimation to ATC. f) Barricade provided at road holding point of service road leading to runway and other manoeuvring area is in closed condition except fire station approach road to runway. If traffic lights are provided at road holding point the same should be in ON condition. g) Ensuring availability of secondary power supply for changeover, with switchover time of maximum 1 second for RWY Edge, RWY End and Threshold lights supported by UPS. h) Initiate action for Manual RVR in coordination with IMD, if RVR equipment is unserviceable.	ATC/ARFF/MET

		i) Ops In-charge will co-coordinate with all the concerned agencies for implementation of Low Visibility Procedures. j) Ops In-charge will inspect Movement area, AGL System and Associated Roads with all the concerned HOD as per Check List **Note-1**: RWY Edge, Threshold lights and RWY End lights may continue to operate on main power supply during safeguarding Procedures. Whenever LVP is to be implemented the RWY Edge, Threshold lights and RWY End lights shall be put on Standby Power Supply (DG set or UPS). This operation needs to be completed before LVP is implemented. **Note-2:** As UPS is available at Maharishi Valmiki International Airport, Ayodhyadham, Ayodhya capable of maintaining the required AGL system with one second of Switchover time, the main supply can continue to be the primary source of supply, and the Generator Supply can be kept as Standby Power supply. In case UPS is unserviceable, Generator supply shall be the primary source of power supply and Main power supply shall act as standby power supply.)	
4.3	**Implementation of SP**	When meteorological conditions meet the criteria for initiation of SP as stipulated in Sl. No 4.1, the duty officer tower will inform Ops In-charge. Ops In-charge will coordinate with IC Electrical, Civil, Fire and MT. **NOTE:** Action to be taken by various agencies is attached as Annexure 1. Ops Inimplementation of SP check list must be completed. When all the concerned agencies have completed their necessary actions, they shall report to DUTY OFFICER TOWER (ATC) that their Safeguarding Procedure (SP) is completed, and the airport is safeguarded for LVP operations.	ATC/ARFF
4.4	**Condition for Low Visibility Procedures**	Low Visibility Procedures shall be implemented when – a) Visibility is less than 800 m; and/or Cloud ceiling is less than 200 ft.; AND b) Safeguarding Procedures (SP) have been completed, and the airport is safeguarded.	

4.5	**Low Visibility Procedures (LVP**	a) Low Visibility Procedures are the actions to ensure the safe operation of aircraft during periods of reduced visibility or low cloud base. b) LVP shall only be implemented when Safeguarding Procedures (SP) has been completed, and the airport is configured for low visibility operations. (Note: Though LVP is implemented when RVR is less than 800m, ILS CAT I operation will continue till Visibility/RVR is not less than 550m)	ATC/ARFF
4.6	**Implementation of LVP**	When meteorological conditions meet the criteria for LVP as stipulated in Sl. No. 4.4 Duty Officer Tower (ATC) implements Low Visibility Procedure, and the following action shall be followed: a) ATC shall declare LVP in force, and intimate In-charge- Airside Operations / ARFF. This information will also be included in the DATIS b) ARFF shall ensure positioning of 1 CFT at the predetermined position Grid Location C4, immediately on implementation of LVP. c) In-charge Airside Operations on receiving the information shall inform concerned stakeholders (ARFF, MET, E&M, CSO & Airlines/GHA) of enforcement of LVP. d) All maintenance work on the apron shall be stopped. However, any maintenance work of urgent nature may be carried out under strict monitoring of Follow Me in coordination with ATC. e) Records of all vehicles operating on the manoeuvring area during LVP shall be maintained by In-charge- Airside Operations and the record be made available to ATC. f) In-charge- Airside Operations shall in coordination with ATC, implement Mandatory Follow Me' service for all aircraft on apron, if the visibility conditions so demand. g) ATC shall permit only one pushback at a time on apron and one aircraft on the manoeuvring area. h) No towing of aircraft shall be permitted during LVP. However, in case of urgent requirement, towing may be permitted under mandatory 'Follow Me' guidance. i) High Power Engine Ground Run (HPEGR) will not be permitted during LVP. If any HPEGR is already in progress, aircraft will be advised to stop engine run and proceed to allocated stand	ATC/ARFF/MET

		j) If RVR equipment is unserviceable, manual RVR shall be obtained and provided for all departing aircraft. k) Suspend operations if RVR drops below 400 m. l) The presence of a Met Officer shall be ensured in ATC Tower during the time of LVP for assisting the ATC Controller with updated met reports. **In-charge, Airside Operations shall be responsible for carrying out the following actions:** a) Carry out inspection of manoeuvring and movement areas as part of Safeguarding Procedures. b) Coordinate with engineering departments to ensure availability of backup power system before implementation of LVP. c) Coordinate with ATC and IMD for manual RVR, if the RVR equipment is reported to be unserviceable. d) Ensure that the Safeguarding Procedures are completed prior to implementation of LVP and report the same to ATC. e) Strictly restrict/regulate vehicular traffic on the manoeuvring area. Record of all vehicles operating on the manoeuvring area during LVP shall be maintained and the record be made available to ATC. f) Stop all works within the manoeuvring area. g) Report any unserviceability of AGL which is essential for the implementation of LVP (RWY edge lights, RWY end lights and RWY threshold lights) and advise ATC not to implement LVP or if already in force, advise on termination. h) Ensure that Runway lights are inspected every 2 hours after implementation of LVP during its continuance.	
4.7	**TERMINATION OF LVP**	a) When visibility/RVR improves to 800 m or more and/or cloud ceiling is 200 feet or higher and upward trend is forecasted by the Met Officer. b) ATC shall inform In-charge, Airside Operations regarding the termination of LVP He shall inform all concerned departments about termination of LVP. c) If SP are initiated and Low Visibility Procedures are not subsequently implemented and the visibility/RVR improves and is more than 1200 m and/or the cloud ceiling is 400 ft. or higher and both are forecast to remain above the required SP criteria, ATC may cancel SP.	ATC/ARFF/MET

5.ESCALATION MATRIX

Sl. No	Criteria	Escalation by	Escalation to
1.	Any impact on ACFT operation due to LVP	Duty ATCO	ATC In-charge/APD

6.INPUT/OUTPUT

Sl. No	Input	Output
1.	Visibility/RVR 1200m	Implementation/Termination of SP

7.PROCESS MONITORING

Sl. No	Parameter	Target	Responsibility	Frequency	Review Mechanism
1.	Initiation of LVP	RVR 800m	Duty Officer Tower	As and when vis reduces	--

8.MIS/REPORTS

Sl. No	Report Name	Circulation to	Frequency
1.	Nil		

9.MET EQUIPMENT INSTALLED AT MAHARISHI VALMIKI INTERNATIONAL AIRPORT, AYODHYADHAM, AYODHYA:

Two DCWIS equipment installed at both side of runway 11/29. At Runway 11 side DCWIS is installed left side of runway 11 and distance from runway 11 extremity is 200 meter & distance from runway Centre line is 115 meters.
On runway 29 side, DCWIS is installed right side of runway 29. Distance from the extremity of runway 29 is 360 meter and distance from runway Centre line is 115 meter.

ANNEXURE 1

ACTIONS TO BE TAKEN BY VARIOUS AGENCIES

Before commencement of winter season, a meeting will be held by Airport Director with concerned agencies in the month of November every year to inform all airlines and agencies operating at airport about their roles/ responsibilities and create awareness to ensure cooperation for safe airport operations during periods of low visibility.
All the agencies shall ensure that staff and drivers are suitably trained during CAT I operations.

1.Action by Aerodrome Tower Controller:

On being notified by MET for reduction in visibility below CAT I, then Low Visibility Procedures are to commence, the Aerodrome Tower Controller will:

a) Inform Aerodrome Rescue & Fire Fighting Services.
b) Check ILS status.
c) Check lighting is correctly selected and operating properly.
d) Check Transmissometer displays.
e) Monitor all surface movement of aircraft and vehicles on the manoeuvring area.
f) Inform all taxiing aircraft of the preceding taxiing or holding aircraft.

2.Action by Communication/Technical/Electronics Shift Supervisory Officer (SSO)

a) On receipt of "Outlook for LVP" from the WSO, the Communication/Technical/ Shift Supervisory Officer [SSO] will inform the Duty Officer, Equipment Room and have the ILS equipment and its status indicators in ATC units checked up. He will inform ATS In-charge of any unserviceability in the equipment which is likely to affect ILS CATI operation.

b) On receipt of “Advisory Message” from ATS In-charge that LVP are to be made effective SSO will maintain continuous watch on the performance of ILS equipment and will inform WSO of any un-serviceability which may affect ILS CATI operation.

3.Action by Operations In-charge

a) On receipt of advice from Duty Officer Tower to implement Safeguarding Procedures, Operations In-charge will immediately inform the following:
i.Electrical In-charge
ii.Civil In-charge
iii.Fire In-charge
iv.MT
v.Civil In-charge

NOTE: Inspection Team shall ensure that all civil works in progress in manoeuvring area, are stopped and that the work area is restored in complete serviceable condition. During ILS CATI Low Visibility Operations, no equipment, manpower or material shall be present in sensitive areas of localizer and glide path.

4.Follow-me vehicles:

a) No vehicle/person enters or is present in the sensitive/critical areas of localizer and glide path.
b) All civil/electrical works in progress are to be stopped in the manoeuvring area immediately and men/material/equipment to be removed from the sensitive/critical areas of localizer and glide path.
c) After ensuring above, Follow-me vehicles will confirm the same to the Operations In-charge.
d) Subsequently, follow-me vehicle shall remain available in apron and will maintain listening watch on their respective frequencies.
e) On receipt of information about unserviceability of any of the runway visual aids or power supply system, Operations In-charge will immediately inform ATC Tower accordingly
f) No vehicles shall enter/cross in the vicinity of runway without permission from ATC Control Tower. Such vehicles shall be equipped with walkie-talkie and able to communicate with ATC. The vehicles of the ARFF services, civil, electrical division or of any other agency which are not equipped with RT but has to enter the runway or taxi track for urgent operational requirement shall be escorted by the follow me jeep all the time.

5.Action by Duty Officer (Meteorological Office)
a) Duty Meteorological Officer would issue an 'Outlook for Low Visibility Procedures' to the ATS In-charge whenever he expects that the RVR and/or cloud ceiling will fall below 800 m and/or 200ft or less respectively.
b) Whenever Duty Meteorological Officer visualizes that RVR is likely to fall below 800 m and/or cloud ceiling to 200ft or less within next 2 hours, he will issue an 'Advisory Message' to ATS In-charge to this effect.
c) When the RVR and/or cloud ceiling are 800m and/or 200ft respectively and the trend is towards improvement in these elements of weather Conditions the Duty Met Officer may, when requested by ATS In-charge, advise him about such improving weather conditions for the purpose of termination of LVP.
d) The Duty Met Officer would ensure that the RVR displays in ATC units in the Control Tower is serviceable. He would also ensure that RVR/visibility recorders of Touch-down zone is serviceable.


6.Action by Other agencies at airport such as - Airlines, Re-fueling Companies, Catering Agencies, Airport Police, Health

a) All agencies operating in the operational area shall ensure that minimum number of their vehicles, as are absolutely essential for aircraft operations, operate in the operational area. The drivers of these vehicles should keep a look out for taxing aircraft and other vehicles to prevent incident/ accidents.
b) All the vehicles must have their obstruction/ anti-collision lights “ON” during operation of low visibility procedures.
c) Follow all instructions/sign boards provided on vehicular movement area/ service roads.
d) No vehicle/equipment/personnel shall enter in and around the vicinity of the runways or taxi-tracks except with prior permission of aerodrome control tower.

CHECK DURING INSPECTION FOR SAFEGUARDING PROCEDURES

S. No	Description	Serviceability Status	Remarks
1.	Work progress in movement and manoeuvring area		
2.	Power supply for Runway Circuit on UPS		
3.	Taxiways 1.Taxiways Guard Light 2.Taxiway Edge light 3.Stop Bar		
4.	Runway 1.Runway Edge Light 2.Runway End Light 3.Runway Threshold Light		

5.	Runway Approach Light		
6.	Apron 1.Mast Light 2.Apron Safety Light		
7.	Barricade Service Road towards Runway		
8.	ILS Critical and Sensitive Area		
9.	CFT Position at PDP		
10.	Obstacle / anti-collision lights on vehicle operating in movement and manoeuvring area		

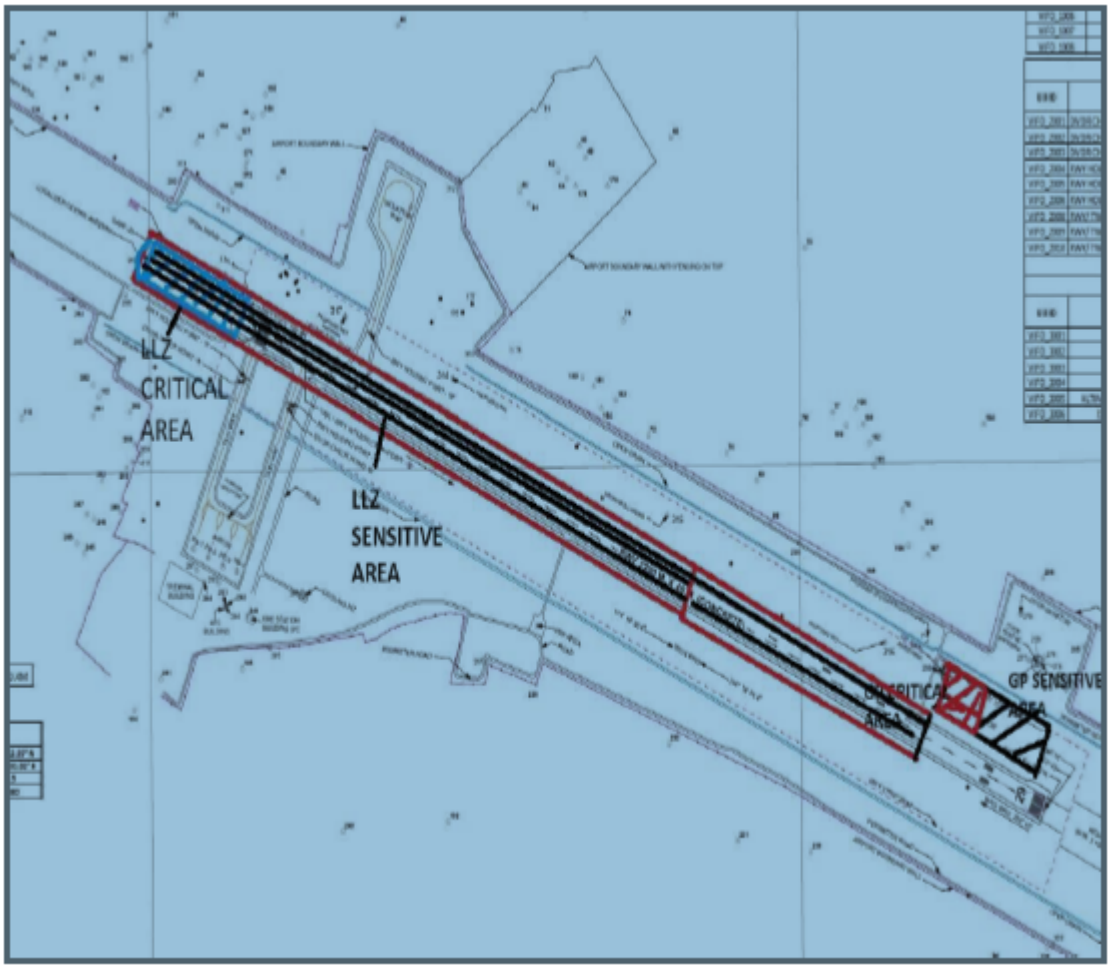

ILS CRITICAL AND SENSITIVE AREA CHART

VEAY AD 2.23 ADDITIONAL INFORMATION

NIL

VEAY AD 2.24 CHARTS RELATED TO AN AERODROME

1 Aerodrome Chart (7 August 2025)
2 Aircraft Parking / Docking Chart (7 August 2025)
3 Aerodrome Obstacle Chart Type-A (Operating Limitations) RWY 11 (7 August 2025)
4 Aerodrome Obstacle Chart Type-A (Operating Limitations) RWY 29 (7 August 2025)
5 Aerodrome Obstacle Chart Type B Chart (7 August 2025)
6 Instrument Approach Chart - ILS Z RWY 29 (CAT A/B/C)
7 Instrument Approach Chart - ILS Y RWY 29 (CAT A/B/C)
8 Coding Table - ILS Y Procedure RWY 29
9 Instrument Approach Chart – VOR RWY 11 (CAT A/B/C)
10 Instrument Approach Chart – VOR RWY 29 (CAT A/B/C)
11 Instrument Approach Chart - RNP Procedure RWY 11 (CAT A/B/C) (13 June 2024)
12 Tabular Description - RNP Procedure RWY 11 (13 June 2024)
13 FAS Data Block Table - RNP Procedure RWY 11 (13 June 2024)
14 Instrument Approach Chart - RNP Procedure RWY 29 (CAT A/B/C) (13 June 2024)
15 Tabular Description - RNP Procedure RWY 29 (13 June 2024)
16 FAS Data Block Table - RNP Procedure RWY 29 (13 June 2024)

VEAY AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION

Procedure	Procedure Minima	VSS Penetration
1	2	3