1 – 1

VISP SARSAWA — IAF 09 JUL 26 — SARSAWA, INDIA CAT I ILS RWY 27

SARSAWA Approach VC,UC			SARSAWA Tower 120.2 VC,UC		ATIS 111.6
VOR SSW 111.6	LOC ISSW 110.1	FINAL Apch Crs 268°	FAF D 5.4 ISSW 2600'	DA (H) As Per Table	Apt Elev 896' RWY 896'

MISSED APCH : Climb STRAIGHT AHEAD to 2000', then climbing turn RIGHT to join VOR hold at 2800' or as directed by ATC.

Alt Set: hPa	Rwy Elev: 32 hPa	Trans level: By ATC	Trans alt: 6000'


4100' (090° – 270°) 2200' MSA SSW VOR

1 Inch = 5.0 NM

5 NM 0 5 NM

DME Required


MAX O/B 220 kts

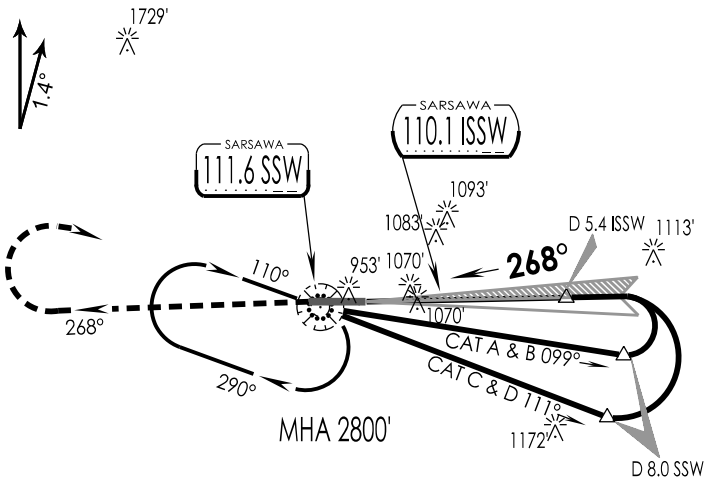

SURVEY PERIOD: 2023-24

Caution:-
Procedure to be carried out in co-ordination with AMBALA ATC

LOC(GS OUT)	ISSW DME	2.0	3.0	4.0	5.0	5.4
	ALTITUDE (ft)	1520	1840	2160	2480	2600

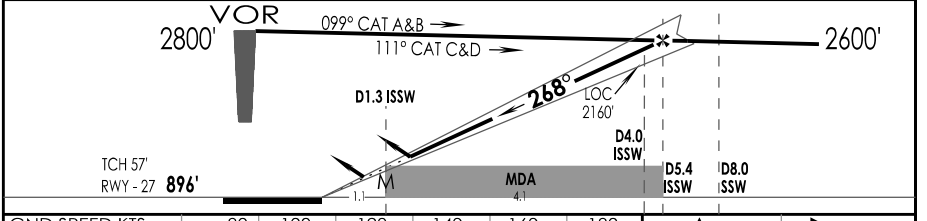

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3°	425	531	637	743	849	955
MAPt AT D1.3 ISSW						

2000' 2800' RT

STRAIGHT-IN LANDING RWY 27

	ILS DA (H) ABCD: 1114'(218') FULL	ILS DA (H) ABCD: 1114'(218') ALS OUT	LOC (GS OUT) CDFA MDA(H) 1320' (424') FULL	LOC (GS OUT) CDFA MDA(H) 1320' (424') ALS OUT
A	RVR 550m	RVR 1200m	RVR 1300m	RVR 1500m
B				
C				RVR 2000m
D				

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
A	1440'(552')	2800m
B		
C	1490'(594')	3200m
D	1590'(694')	3600m

CHANGES : ATIS & VOR FREQUENCY

IPDC, DTE OF OPS (T & H)