1-3

VISP
SARSAWA

IAF
09 JUL 26

SARSAWA, INDIA
CAT II ILS RWY 27

SARSAWA Approach VC,UC			SARSAWA Tower 120.2 VC,UC		ATIS 111.6
VOR SSW 111.6	LOC ISSW 110.1	FINAL Apch Crs 268°	FAF D 5.4 ISSW 2600'	DA (H) As Per Table	Apt Elev 896' RWY 896'

MISSED APCH : Climb STRAIGHT AHEAD to 2000', then climbing turn RIGHT to join VOR hold at 2800' or as directed by ATC.

Alt Set: hPa	Rwy Elev: 32 hPa	Trans level: By ATC	Trans alt: 6000'


4100'
090° 270°
2200'
MSA
SSW VOR

1 Inch = 5.0 NM
5 NM
0
5 NM


SURVEY PERIOD: 2023-24

DME Required

MAX O/B 220 kts

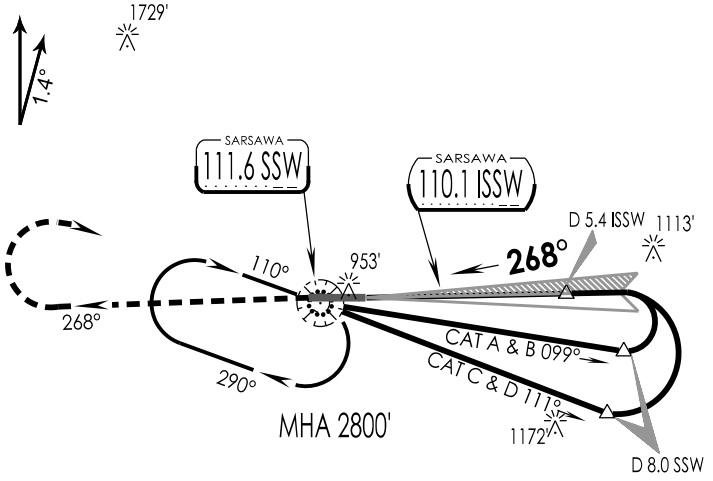

Caution:-
Procedure to be carried out in co-ordination with AMBALA ATC

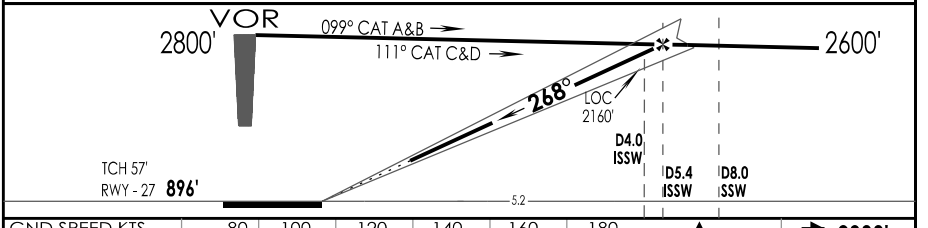

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3°	425	531	637	743	849	955

2000'
2800' RT

STRAIGHT - IN LANDING Rwy 27
CAT II ILS

DA (H)		RA	
A&B: **1012'** (116')	C: **1024'** (128')		
D: **1038'** (142')	A&B: 116'	C: 128'	D: 142'

FULL

A	RVR 300m
B	RVR 400m
C	RVR 400m
D	RVR 450m

CHANGES : ATIS & VOR FREQUENCY

IPDC, DTE OF OPS (T & H)