4-2

VISP
SARSAWA

IAF
03 SEP 26

SARSAWA, INDIA
NDB RWY 09

SARSAWA Approach	SARSAWA Tower	ATIS
VC,UC	120.2 VC,UC	111.6

NDB SP	FINAL Apch Crs	MDA (H)	Apt Elev 896'
298	096°	1440'(552')	RWY 888'

MISSED APCH : Climb STRAIGHT AHEAD to 2000', then climbing turn LEFT to join NDB hold at 2800' or as directed by ATC.


Alt Set: hPa	Rwy Elev: 32 hPa	Trans level: By ATC	Trans alt: 6000'

4100'
090° 270°
2200'
MSA
NDB


MAX O/B 220 kts

SURVEY PERIOD: 2023-24

1 Inch = 5.0 NM
5 NM
0
5 NM

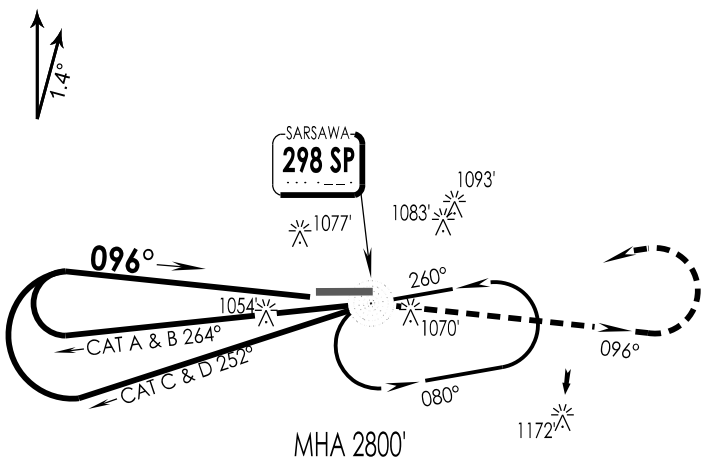

Caution:-
Procedure to be carried out in co-ordination with AMBALA ATC

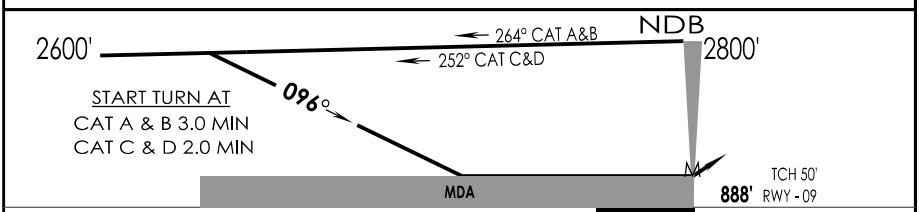

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3°	425	531	637	743	849	955

MAPt AT NDB

2000' 2800' LT

STRAIGHT-IN LANDING RWY 09

non - CDFA

MDA(H) 1440' (552')

	IALS	ALS OUT
A	RVR 2300m	RVR 2700m
B		
C	RVR 2500m	RVR 2900m
D		

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
A	1440'(552')	2800m
B		
C	1490'(594')	3200m
D	1590'(694')	3600m

CHANGES : MISSED APPROACH

IPDC, DTE OF OPS (T & H)