4-1

VISP SARSAWA — IAF 09 JUL 26 — SARSAWA, INDIA NDB RWY 27

SARSAWA Approach VC,UC	SARSAWA Tower 120.2 VC,UC	ATIS 111.6
NDB SP **298** / FINAL Apch Crs **253°**	MDA (H) **1410'**(514')	Apt Elev 896' / RWY 896'


MISSED APCH : Climb STRAIGHT AHEAD to 2000', then climbing turn RIGHT to join NDB hold at 2800' or as directed by ATC.

Alt Set: hPa	Rwy Elev: 32 hPa	Trans level: By ATC	Trans alt: 6000'

4100' (090° → ← 270°) 2200' — MSA NDB

MAX O/B 220 kts


1 Inch = 5.0 NM

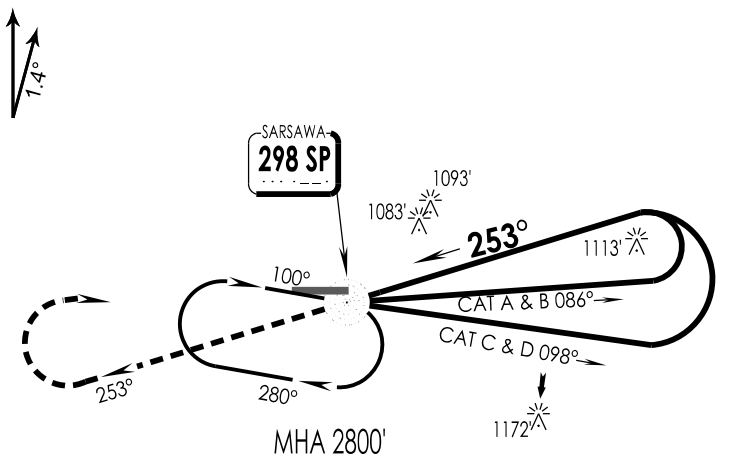

5 NM 0 5 NM

SURVEY PERIOD: 2023-24

Caution:-
Procedure to be carried out in co-ordination with AMBALA ATC

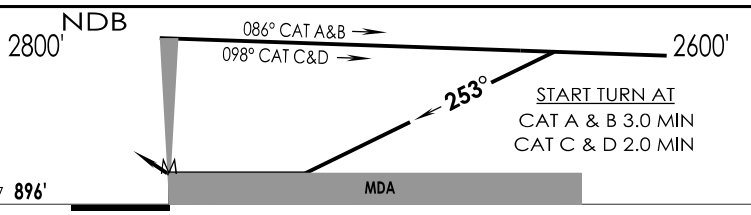

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3°	425	531	637	743	849	955

MAPt AT NDB

2000' | 2800' RT

STRAIGHT-IN LANDING RWY 27

non - CDFA

MDA(H) **1410'** (514')

	FULL	ALS OUT
A	RVR 1800m	RVR 2600m
B		
C	RVR 2000m	RVR 2800m
D		

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
A	**1440'**(552')	2800m
B		
C	**1490'**(594')	3200m
D	**1590'**(694')	3600m

CHANGES : ATIS FREQUENCY

IPDC, DTE OF OPS (T & H)