2-3

VISP SARSAWA — IAF 09 JUL 26 — SARSAWA, INDIA VOR Z RWY 09

SARSAWA Approach VC,UC		SARSAWA Tower 120.2 VC,UC		ATIS 111.6
VOR SSW 111.6	FINAL Apch Crs 096°	FAF D 5.5 SSW 2600'	MDA (H) 1330'(442')	Apt Elev 896' RWY 888'

MISSED APCH : Climb STRAIGHT AHEAD to 2000', then climbing turn LEFT to join VOR hold at 2800' or as directed by ATC.


Alt Set: hPa	Rwy Elev: 32 hPa	Trans level: By ATC	Trans alt: 6000'

4100' / 090° 270° / 2200' — MSA SSW VOR

DME Required

MAX O/B 220 kts

1 Inch = 5.0 NM

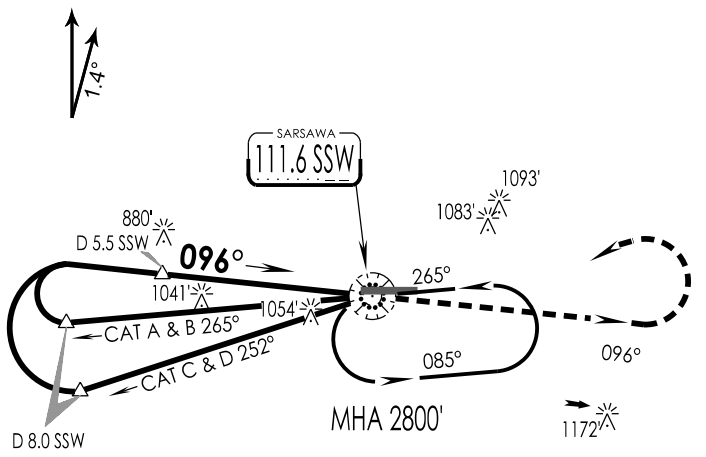


5 NM

0

5 NM

Caution:-
Procedure to be carried out in co-ordination with AMBALA ATC

SSW DME	5.5	5.0	4.0	3.0	2.0
ALTITUDE (ft)	2600	2450	2130	1810	1490

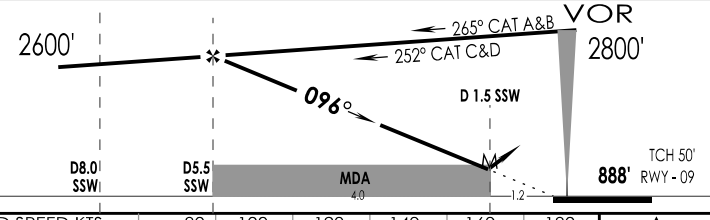

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3°	425	531	637	743	849	955
MAPt AT D1.5 SSW						

2000' 2800' LT

STRAIGHT-IN LANDING RWY 09

CDFA

MDA(H) **1330'** (442')

	IALS	ALS OUT
A	RVR 1500m	
B		
C	RVR 1700m	RVR 2100m
D		

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
A	**1440'**(552')	2800m
B		
C	**1490'**(594')	3200m
D	**1590'**(694')	3600m

CHANGES : ATIS & VOR FREQUENCY

IPDC, DTE OF OPS (T & H)

SURVEY PERIOD: 2023-24