2-4

VISP SARSAWA — IAF 09 JUL 26 — SARSAWA, INDIA VOR Y RWY 09

SARSAWA Approach	SARSAWA Tower	ATIS
VC,UC	120.2 VC,UC	111.6

VOR SSW	FINAL Apch Crs	MDA (H)	Apt Elev 896'
111.6	096°	1340'(452')	RWY 888'

MISSED APCH : Climb STRAIGHT AHEAD to 2000', then climbing turn LEFT to join VOR hold at 2800' or as directed by ATC.


Alt Set: hPa	Rwy Elev: 32 hPa	Trans level: By ATC	Trans alt: 6000'

4100'
090° — 270°
2200'
MSA SSW VOR


MAX O/B 220 kts

SURVEY PERIOD: 2023-24

1 Inch = 5.0 NM
5 NM
0
5 NM

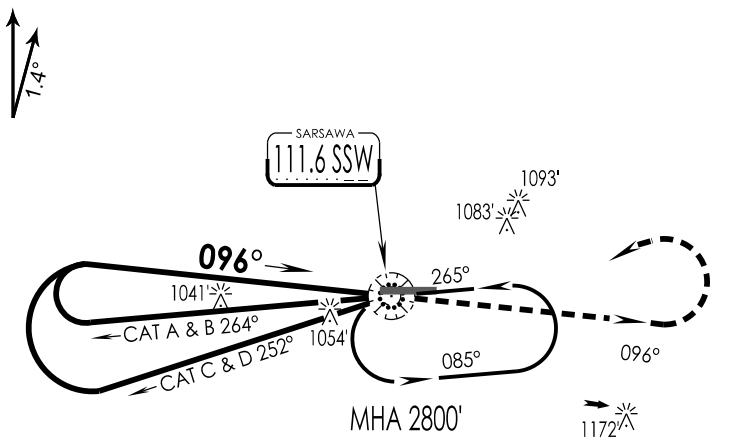

Caution:-
Procedure to be carried out in co-ordination with AMBALA ATC

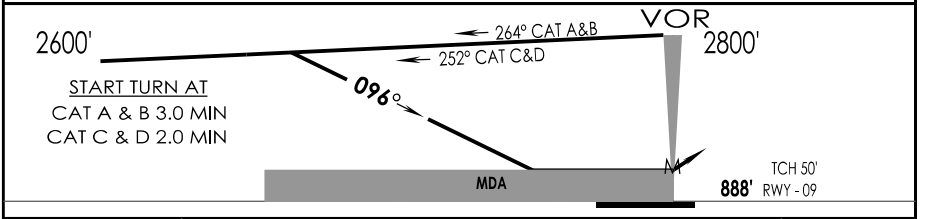

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3°	425	531	637	743	849	955
MAPt AT VOR						

2000' 2800' LT

STRAIGHT-IN LANDING RWY 09

non - CDFA

MDA(H) 1340' (452')

	IALS	ALS OUT
A	RVR 1900m	RVR 2300m
B		
C	RVR 2100m	RVR 2500m
D		

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
A	1440'(552')	2800m
B		
C	1490'(594')	3200m
D	1590'(694')	3600m

CHANGES : ATIS & VOR FREQUENCY

IPDC, DTE OF OPS (T & H)