2-2

VISP IAF SARSAWA, INDIA
SARSAWA 03 SEP 26 VOR Y RWY 27

SARSAWA Approach	SARSAWA Tower	ATIS
VC,UC	120.2 VC,UC	111.6

VOR SSW	FINAL Apch Crs	MDA (H)	Apt Elev 896'
111.6	263°	1410'(514')	RWY 896'


4100'
090° 270°
2200'
MSA
SSW VOR

MISSED APCH : Climb STRAIGHT AHEAD to 2000', then climbing turn RIGHT to join VOR hold at 2800' or as directed by ATC.

Alt Set: hPa	Rwy Elev: 32 hPa	Trans level: By ATC	Trans alt: 6000'


1 Inch = 5.0 NM
5 NM
0
5 NM

MAX O/B 220 kts

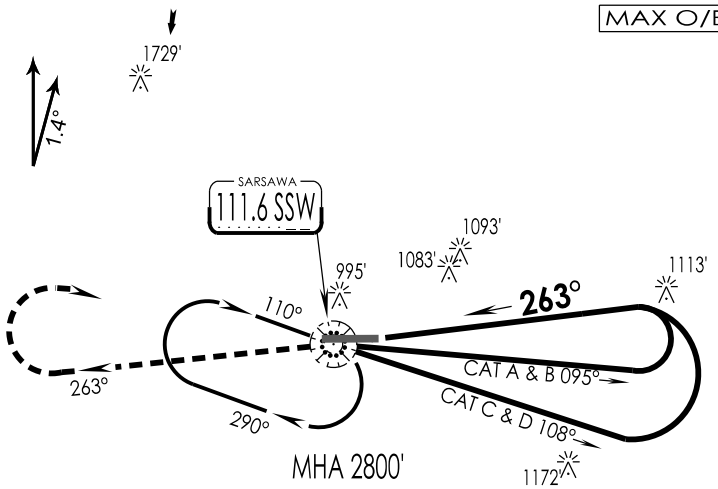

SURVEY PERIOD: 2023-24

Caution:-
Procedure to be carried out in co-ordination with AMBALA ATC

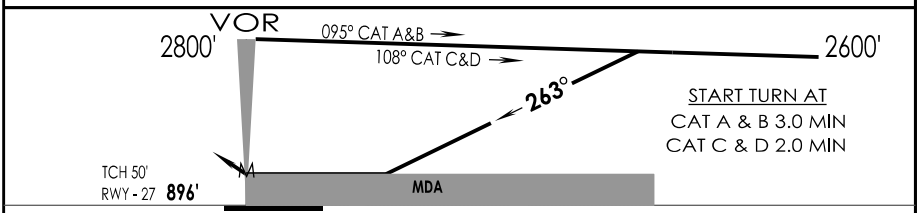

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3°	425	531	637	743	849	955

MAPt AT VOR

2000' 2800' RT

STRAIGHT-IN LANDING RWY 27

non - CDFA

MDA(H) 1410' (514')

	FULL	ALS OUT
A	RVR 1800m	RVR 2600m
B		
C	RVR 2000m	RVR 2800m
D		

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
A	1440'(552')	2800m
B		
C	1490'(594')	3200m
D	1590'(694')	3600m

CHANGES : FAF REMOVED

IPDC, DTE OF OPS (T & H)