2-1

VISP SARSAWA — IAF 09 JUL 26 — SARSAWA, INDIA VOR Z RWY 27

SARSAWA Approach VC,UC		SARSAWA Tower 120.2 VC,UC		ATIS 111.6
VOR SSW 111.6	FINAL Apch Crs 263°	FAF D 6.4 SSW 2600'	MDA (H) 1330'(434')	Apt Elev 896' RWY 896'

MISSED APCH : Climb STRAIGHT AHEAD to 2000', then climbing turn RIGHT to join VOR hold at 2800' or as directed by ATC.

Alt Set: hPa	Rwy Elev: 32 hPa	Trans level: By ATC	Trans alt: 6000'


4100' / 090° / 270° / 2200' — MSA SSW VOR

1 Inch = 5.0 NM — 5 NM — 0 — 5 NM

SURVEY PERIOD: 2023-24


DME Required

MAX O/B 220 kts

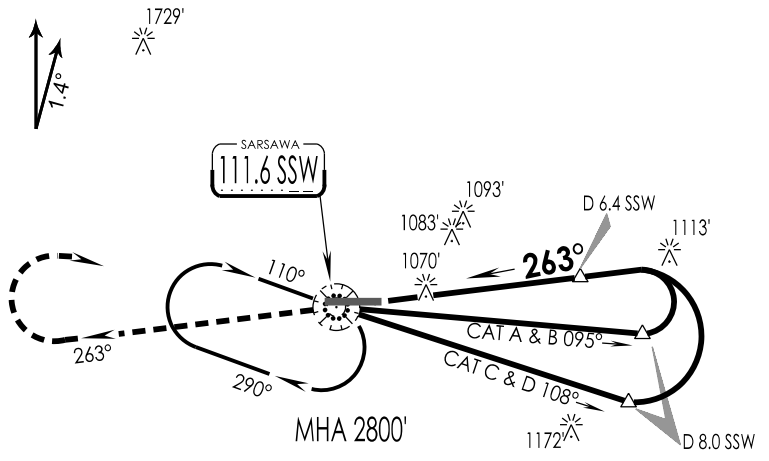

Caution:-
Procedure to be carried out in co-ordination with AMBALA ATC

SSW DME	3.0	4.0	5.0	6.0	6.4
ALTITUDE (ft)	1520	1840	2160	2480	2600

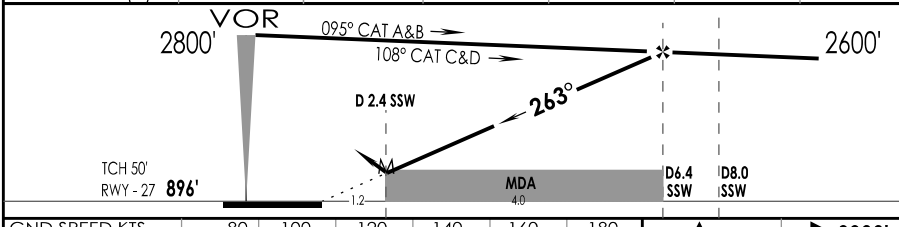

GND SPEED KTS	80	100	120	140	160	180
DESCENT ANGLE 3°	425	531	637	743	849	955

MAPt AT D2.4 SSW

2000' — 2800' RT

STRAIGHT-IN LANDING RWY 27

CDFA

MDA(H) **1330'** (434')

	FULL	ALS OUT
A	RVR 1300m	RVR 1500m
B		
C		RVR 2000m
D		

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
A	**1440'**(552')	2800m
B		
C	**1490'**(594')	3200m
D	**1590'**(694')	3600m

CHANGES : ATIS & VOR FREQUENCY

IPDC, DTE OF OPS (T & H)