2-1

VISR
SRINAGAR

IAF
25 AUG 23 Eff 22 NOV 23

SRINAGAR, INDIA
VOR RWY 31

SRINAGAR Approach	SRINAGAR Tower	ATIS
133.2 VC, UC	130.5 VC, UC	116.4

VOR SGR	FINAL Apch Crs	FAF	MDA (H)	Apt Elev 5487'
116.4	313°	D10.0 SGR 8000'	5860' (373')	RWY 5487'

MISSED APCH : On HDG 315° (M) Climb STRAIGHT AHEAD to 8000', then climbing turn RIGHT to join VOR hold at 10800' or as directed by ATC.

Alt Set: hPa	Rwy Elev: 200 hPa	Trans level: By ATC	Trans alt: 20000'

MSA
SGR VOR
180°
16300' 19500'
090° 270°
17600' 17100'
000°

SCALE: 1 Inch = 7.5 NM
7.5 NM 0 7.5 NM


SURVEY PERIOD : 2022-23 & 2023-24

MAX IAS 185 kts
DME Required

315° 145° 10800' 325° 313° 133° 178° 358°
5581' 5611' 5932' 6493' 6890' 5548'
FAF D 10.0 SGR 8000'
SRINAGAR 116.4 SGR
D 10.0 SGR
AW 238
NOT TO SCALE
IF/R-133/D 21.0,11000'
DR TR 330° D 31.0 15000'
Descend Gradient 6.4% from IAF to IF.
MESAR/IAF/R-140/D 38.0,18000'

AC TO REMAIN WITHIN **D 12.0 SGR** DURING HOLD

SGR DME	4.0	5.0	6.0	7.0	8.0	9.0	10.0
ALTITUDE (ft)	6090	6410	6720	7040	7360	7680	8000

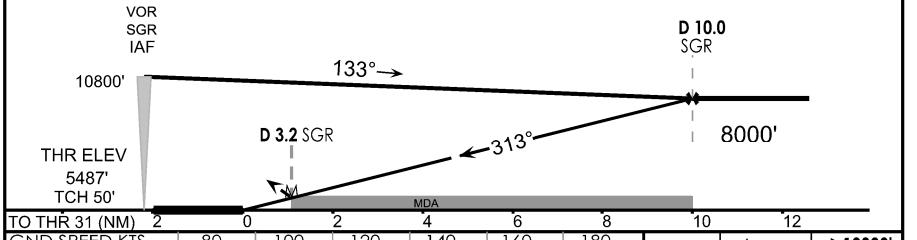

GND SPEED KTS	80	100	120	140	160	180
Descent Angle 3°	420	525	630	735	845	950

MAP at **D3.2** SGR

CAT II
PAPI-R
8000' 315°
10800' RT

STRAIGHT-IN LANDING RWY 31

CDFA
MDA(H) **5860'** (373')

	BALS	ALS OUT
A	RVR 1500m	RVR 1500m
B		
C		RVR 1700m
D		

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
100	**6230'** (743')	3500m
135	**6890'** (1403')	5000m
180		
205	**7290'** (1803')	5000m

CHANGES : NEW PROCEDURE

IPDC, DTE OF OPS (T & H)