1 – 1

VIUT
UTTARLAI

IAF
06 AUG 26

UTTARLAI, INDIA
CAT I ILS RWY 20

UTTARLAI Tower	UTTARLAI Approach	ATIS
123.2, VC, UC	123.2, VC, UC	114.5

VOR UTR	LOC IUTR	FINAL Apch Crs	GS D 4.0 IUTR	DA (H)	Apt Elev 505'
114.5	111.1	199°	1780'	717' (213')	RWY 504'

MISSED APCH : Climb STRAIGHT ahead to 1600', then climbing Turn Left to join VOR hold at 2400' or as directed by ATC.

Alt Set: hPa	Rwy Elev: 17 hPa	Trans level: By ATC	Trans alt: 4000'

3500' (1)
MSA
UTR VOR

1 Inch = 5.0 NM
5.0 NM
5.0 NM
0

SURVEY PERIOD : 2015-16

DME Required


IAF D13.0 UTR 3500'
D11.0 UTR ARC
2200'
R 008
D 10.4 IUTR
2200'
IF
762'
794'
R 334
749'
732'
A
R 038
D 9.0 UTR
D11.0 UTR ARC
2200'
748'
IAF D13.0 UTR
3500'
R 072
199°
D 5.4 IUTR
CAT A&B 032°
CAT C&D 048°
722'
639'
UTTARLAI
111.1 IUTR
UTTARLAI
114.5 UTR
749'
MHA 2400'
662'
607'
048°
228°
686'
936'
1385'
199°
673'
627'
10 Nm
10 Nm

(2) Mangala Processing Terminal

CAUTION :
Mangala Processing Terminal not to be overflown below 200m AGL.

(1) Aircraft to descend to 2400' within D 9.0 UTR

LOC (GS OUT)	IUTR DME	5.4	5.0	4.0	3.0	2.0
	ALTITUDE (ft)	2200	2090	1780	1460	1140

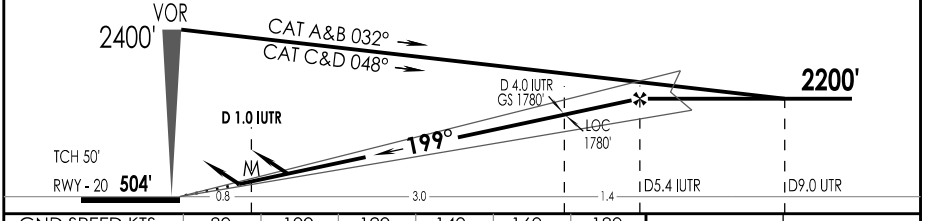

GND SPEED KTS	80	100	120	140	160	180
ILS GS or LOC Descent Angle 3°	425	531	637	743	849	955
MAPt AT D 1.0 IUTR						

1600' 2400'

STRAIGHT-IN LANDING RWY 20

ILS

DA (H) **717'** (213')

	FULL	ALS OUT
A	RVR 550m	RVR 1200m
B		
C		
D		

LOC (GS OUT) CDFA

MDA (H) **890'** (385')

FULL	ALS OUT
RVR 1100m	RVR 1500m
	RVR 1800m

CIRCLE - TO - LAND

Max Kts	MDA (H)	VIS
100	**1170'** (665')	3300m
135		
180	**1330'** (825')	3800m
205		

LIGHTING : CAT-II (20), CL15M(02/20), HIRL 60 M (02/20), TL (02/20), HIALS (20), PAPI (02L/20R), SALS (02)

CHANGES : NOMENCLATURE

IPDC, DTE OF OPS (T & H)