

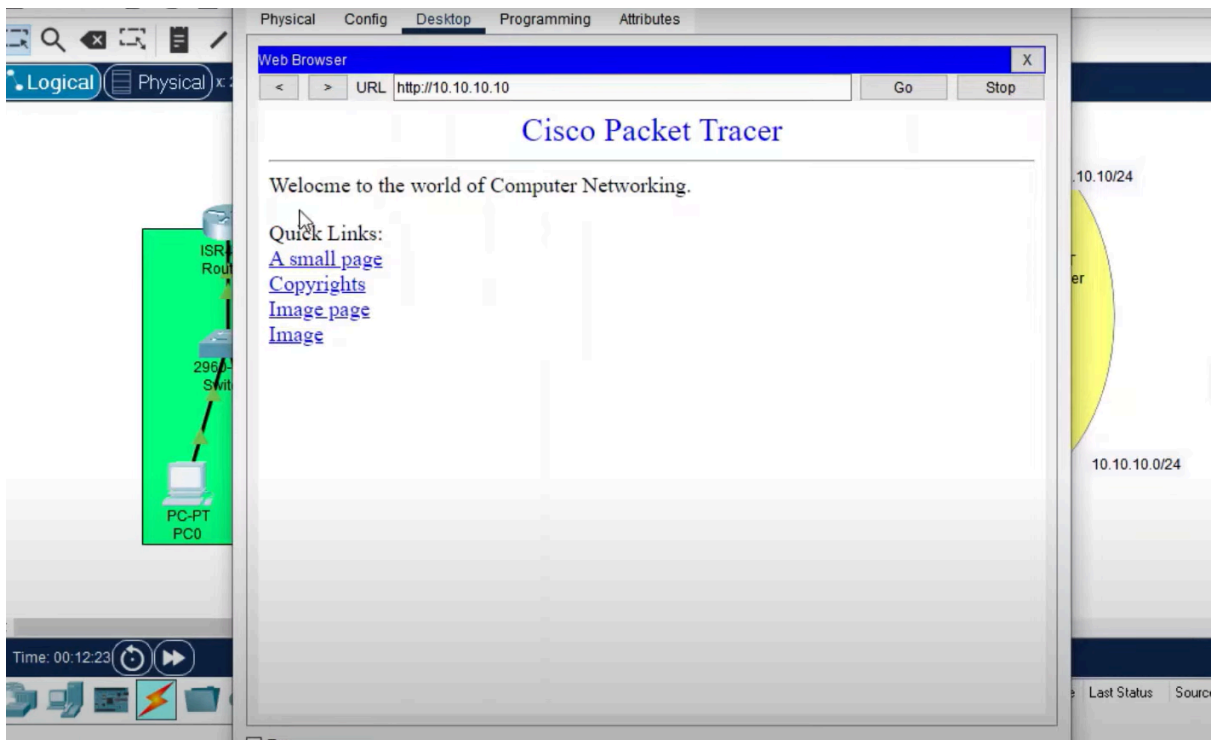



## Cisco Packet Tracer (CPT): Ping, Sniffer, and HTTP/DNS



Configure Web & DNS servers and ping:

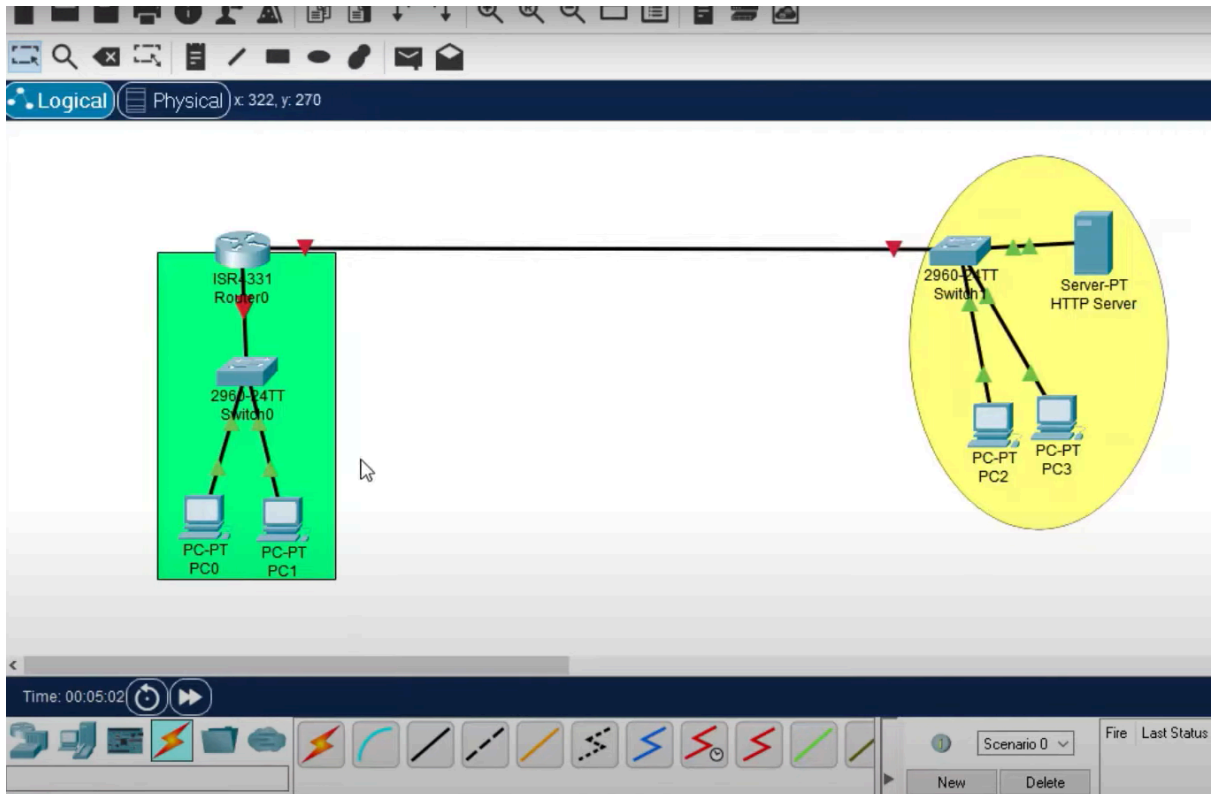

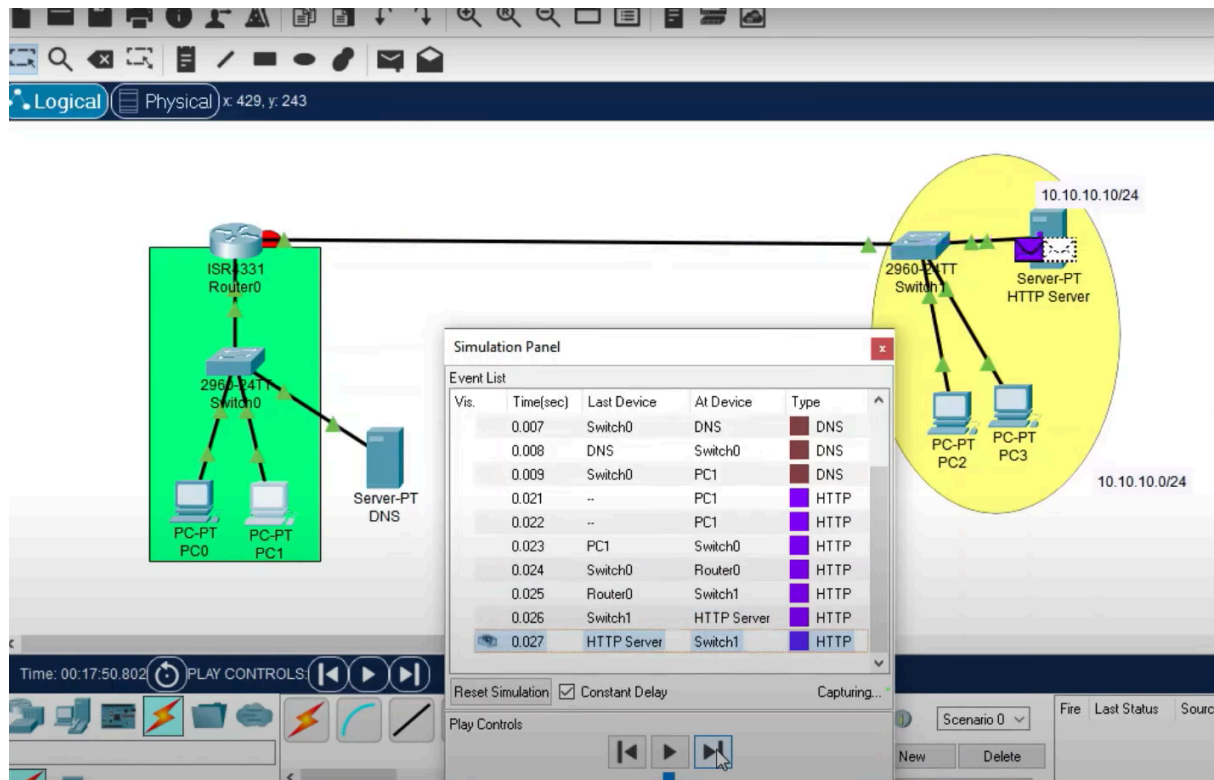

Set up a Sniffer:

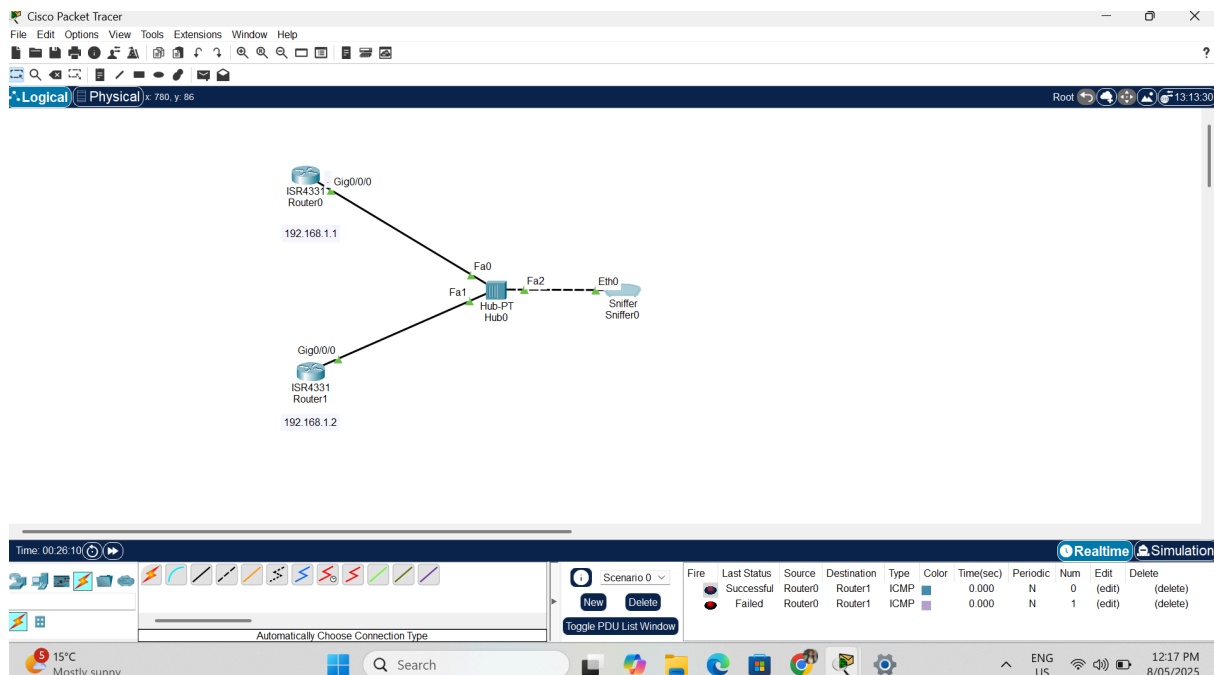

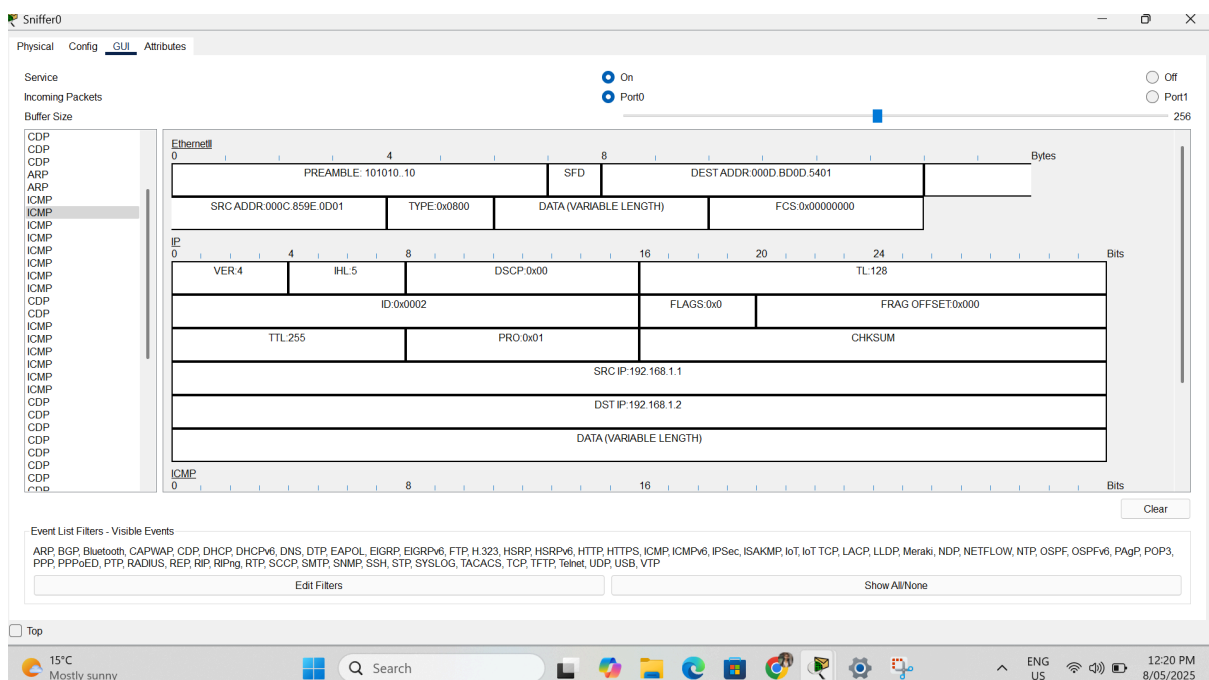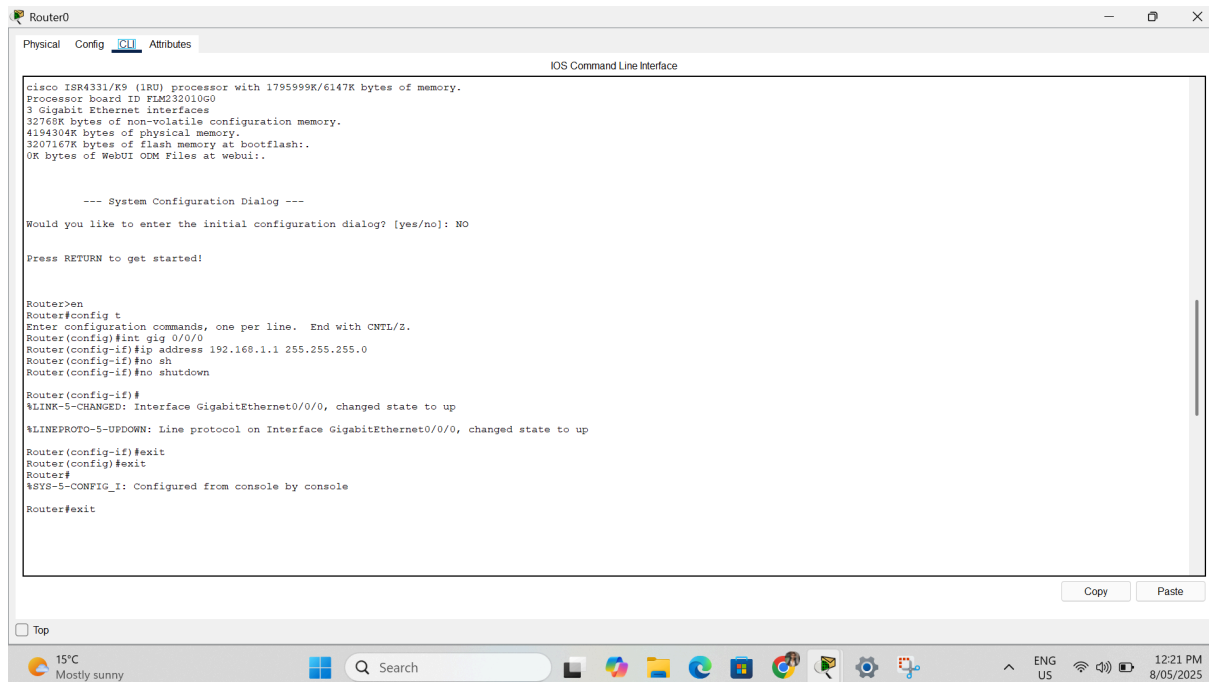

## Explanation:

For web & DNS server configuration and ping, we set up the topology as instructed in cisco packet tracer. There's basically two networks: 192.168.10.0/24 and 10.10.10.0/24. We configured the router, pc and server located in 10.10.10.0/24 network in cli configuration mode. Then we went to server's index file and changed the content line. To test http request, we searched in PC 1 web browser: <http://10.10.10.10> (server ip address) and got access of

the server. But, we human typically don't search IP address in Google, so DNS server basically converts IP address into human readable stuff like <http://networking.com>. To test that, we connected another server with the network 192.168.10.0 and enabled DNS service. Also, we set up the DNS address in the IP configuration setting. Now, we searched <http://networking.com> in web browser on PC 1 and successfully completed our DNS configuration as it displayed the same server portal.

To set up a sniffer, we created a basic network with two routers connected via a hub and added a sniffer to monitor traffic. Router0 and Router1 were configured with IP addresses 192.168.1.1 and 192.168.1.2 respectively, and connected to the hub using their GigabitEthernet0/0 ports. The sniffer was connected to the same hub, allowing it to capture packets due to the hub's broadcast behavior. After enabling simulation mode and sending ICMP (ping) packets between the routers, Sniffer0 successfully captured and displayed detailed packet information, including Ethernet, IP, and ICMP headers, verifying the communication path and packet flow.