

LAB 9: Hands-on Using Cisco Packet Tracer (CPT) on telnet, ssh and firewall:

The image displays two windows from the Cisco Packet Tracer application. The top window, titled 'Router2', shows the 'CLI' tab with the following configuration commands:


```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
Router(config-if)#
Router(config-if)#end
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#line vty 0
Router(config-line)#password 123456
Router(config-line)#login
Router(config-line)#no sh
Router(config-line)#^
```

The bottom window, titled 'PC0', shows the 'Desktop' tab with a 'Command Prompt' window. The command prompt shows the following sequence of commands and output:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>
C:\>telnet 192.168.1.1
Trying 192.168.1.1 ...Open

[Connection to 192.168.1.1 closed by foreign host]
C:\>telnet 192.168.1.1
Trying 192.168.1.1 ...Open

User Access Verification
Password:
Router>
```

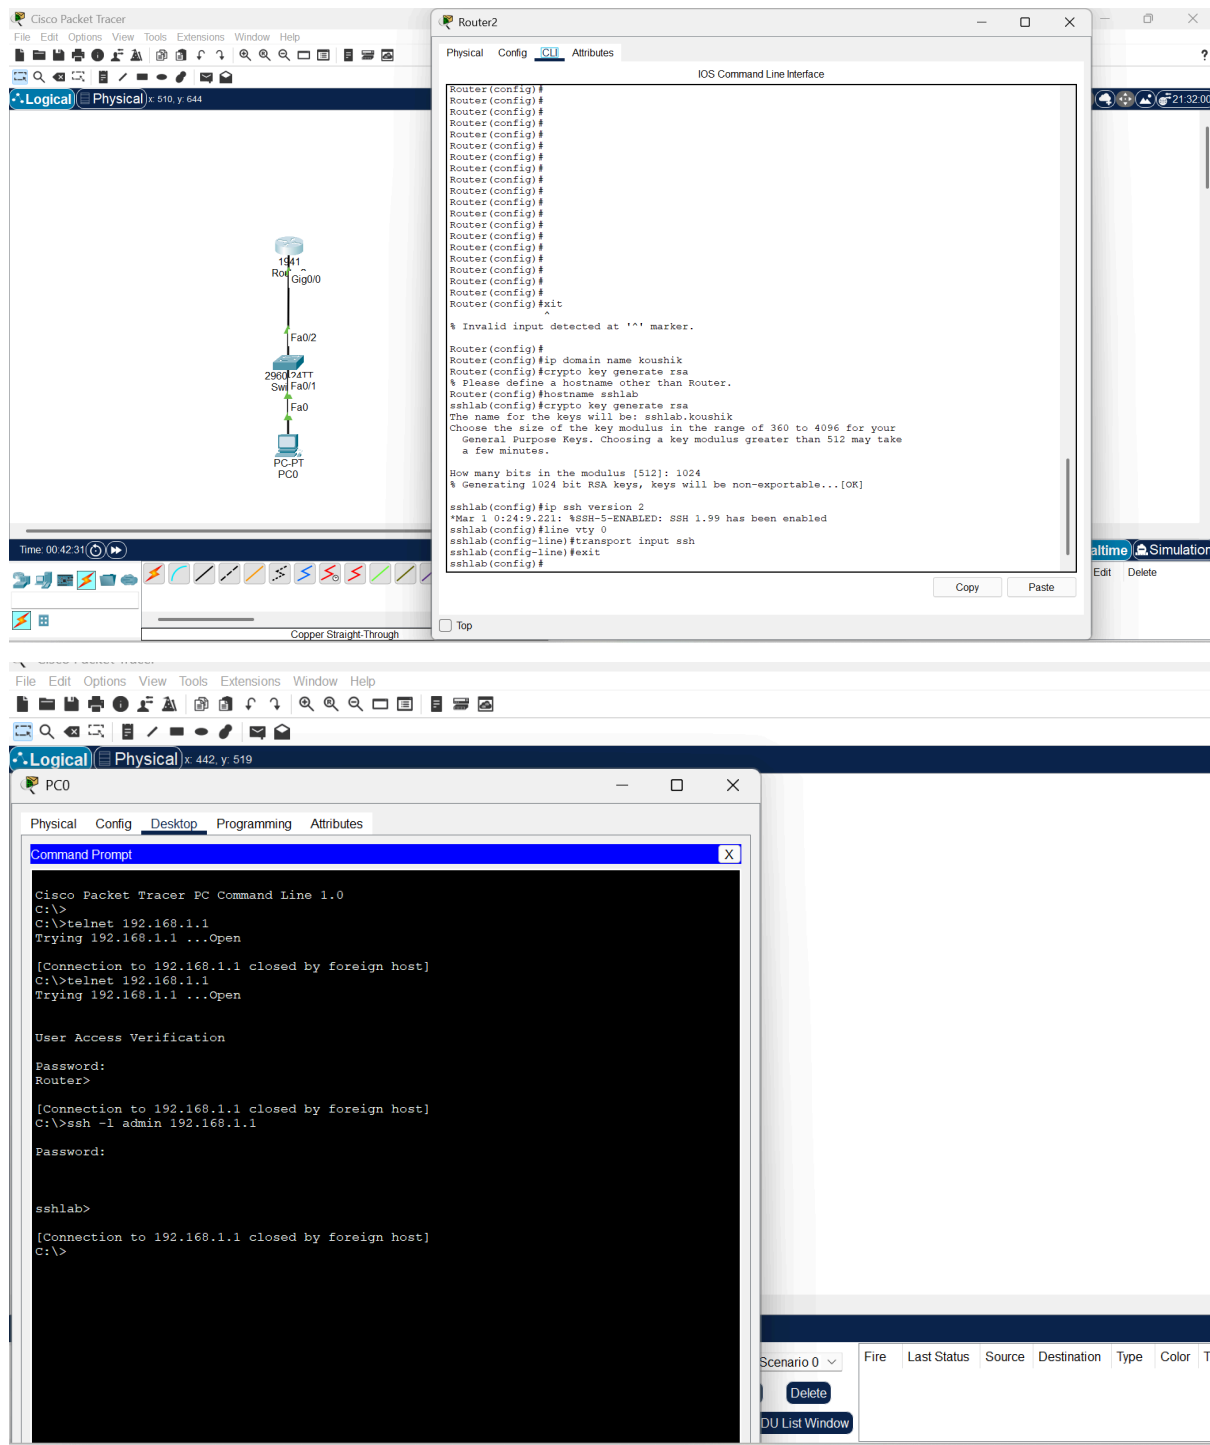

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical

Physical

192.168.1.1

19 Gig0/0

Router

Fa0/2

Fa0/1

Switch

Fa0/3

Fa0

PC-PT

PC0

192.168.1.2

Fa0

PC-PT

PC1

192.168.1.3

Time: 02:19:04

Automatically Choose Connection Type

PC0

Physical Config Desktop Programming Attributes

Firewall

Service

On

Off

Interface: FastEthernet0

Inbound Rules

Action Protocol

Remote IP Remote Wildcard Mask

Remote Port Local Port

Save Remove Add

	Action	Protocol	Remote IP	Remote Wild Card	Remote Port	Local Port
1	Deny	ICMP	0.0.0.0	255.255.255.255	-	-
2	Allow	IP	0.0.0.0	255.255.255.255	-	-

alttime

Simula

Edit (edit) (edit) (edit)

Delete (delete) (delete) (delete)

ICMP (ping) to simulate how firewalls restrict unnecessary communication, while still allowing general IP-based traffic to ensure connectivity. This hands-on activity provided practical experience with configuring remote access protocols and demonstrated how firewalls can filter traffic based on defined rules—crucial skills in real-world network administration.