



INA226 Power Telemetry for DDR Row Conflict Detection — ZCU102 (18 sensors, userspace)


(a) Burst-Mode Temporal Profile — DDR I/O Rail (VCCO_PSDDR, $d=4.80$)

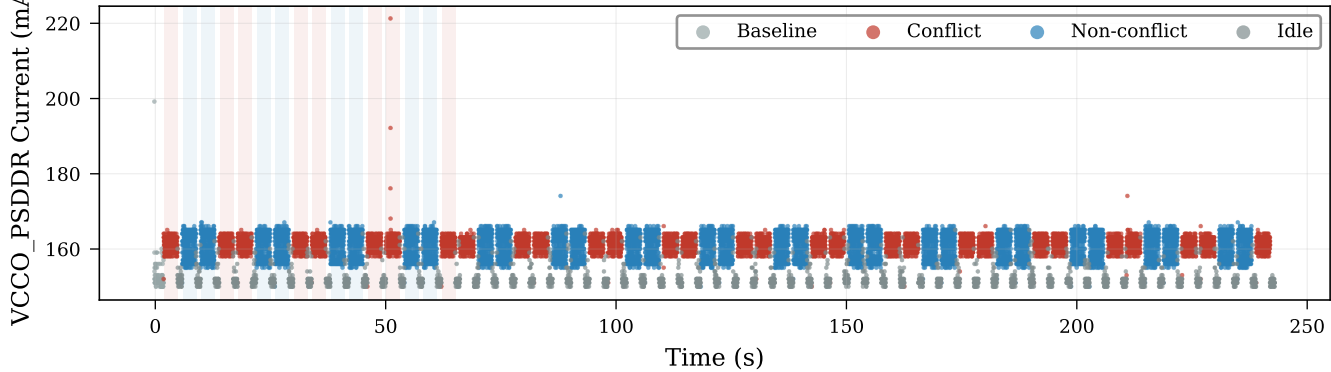


(b) VCCO_PSDDR Burst per-trial

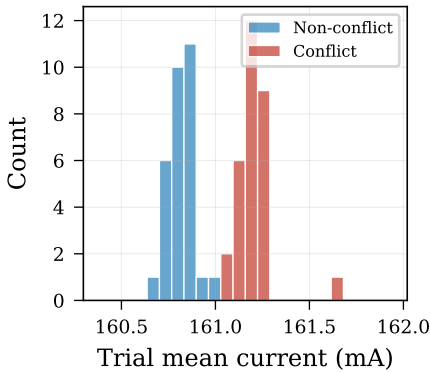


(c) VCCPSINTFP Burst per-trial

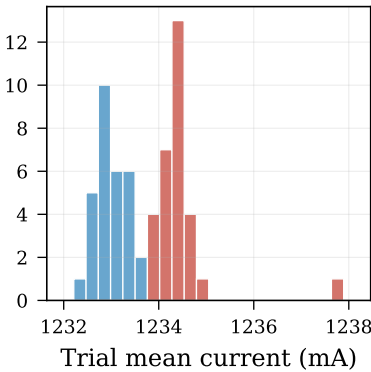


(d) VCCO_PSDDR Per-pair means

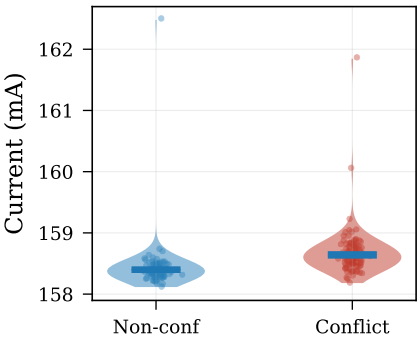

(e) All 18 Sensors — Burst-mode Discriminability (*=DDR-related)

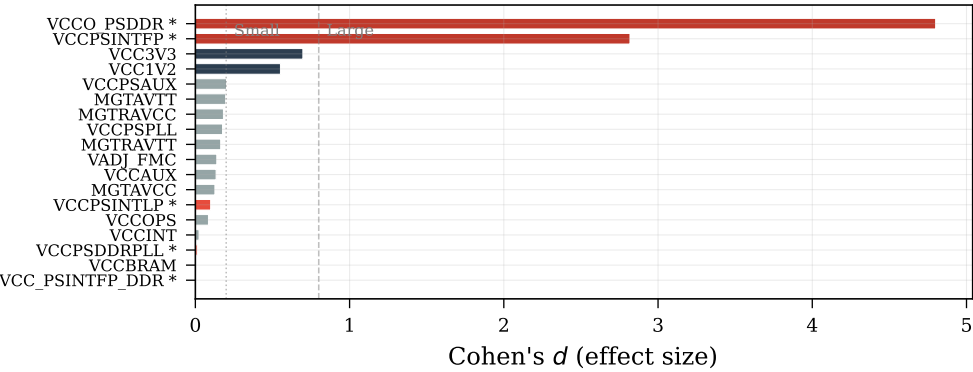

(f) ROC — Per-pair

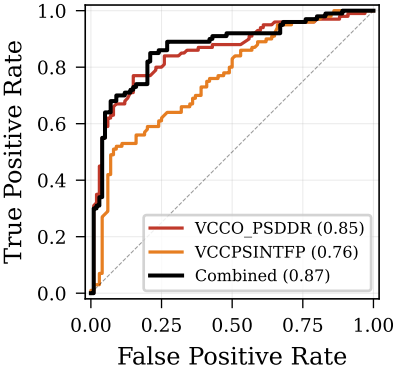

(g) Summary of Discriminability Metrics

Experiment	Metric	VCCO_PSDDR	VCCPSINTFP	Combined
Burst (30 trials)	Cohen's d	4.80	2.82	--
Burst (30 trials)	p -value	1.9e-23	9.2e-14	--
Burst (30 trials)	AUC	1.000	1.000	--
Per-pair (200 pairs)	Cohen's d	0.60	0.40	--
Per-pair (200 pairs)	p -value	3.4e-05	5.6e-03	--
Per-pair (200 pairs)	AUC	0.85	0.76	0.87
Per-pair (200 pairs)	5-CV Accuracy	78.5%	65.5%	78.5%